


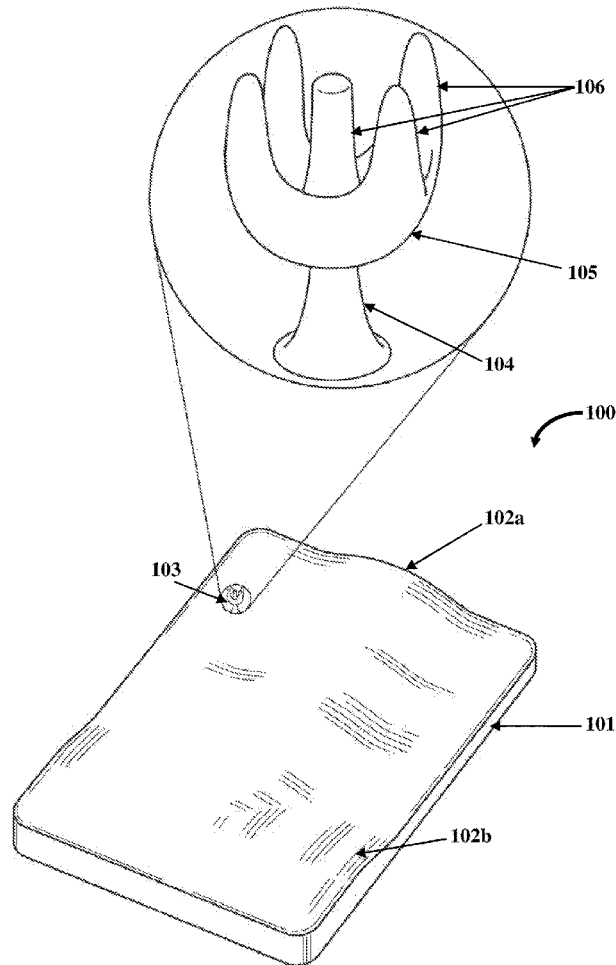

US 20170007078A1

(19) **United States**(12) **Patent Application Publication**
Lopez(10) **Pub. No.: US 2017/0007078 A1**(43) **Pub. Date: Jan. 12, 2017**(54) **MOTORIZED BODY CLEANSING
APPARATUS**(52) **U.S. Cl.**
CPC . *A47K 7/02* (2013.01); *A46B 5/04* (2013.01);
A47K 7/04 (2013.01)(71) Applicant: **Kenneth Oscar Lopez**, Park Forest, IL
(US)(72) Inventor: **Kenneth Oscar Lopez**, Park Forest, IL
(US)(21) Appl. No.: **15/273,700**(22) Filed: **Sep. 22, 2016****Related U.S. Application Data**(63) Continuation-in-part of application No. 13/536,937,
filed on Jun. 28, 2012, now Pat. No. 9,474,359.(60) Provisional application No. 61/501,897, filed on Jun.
28, 2011.**Publication Classification**(51) **Int. Cl.**
A47K 7/02 (2006.01)
A47K 7/04 (2006.01)
A46B 5/04 (2006.01)(57) **ABSTRACT**

A motorized body cleansing apparatus includes a base plate detachably attachable to a support structure, rollers, a guide slide plate (GSP), a split cover plate, a motion transmission assembly, and a base member. The base plate includes guideways positioned on a front surface of the base plate for accommodating the rollers. Elongate guide projections extend from a rear surface of the GSP and slide on the rollers at the front surface of the base plate. The split cover plate secures the GSP to the base plate. The motion transmission assembly is positioned in a cavity of the base plate and is operably coupled to the GSP for moving the GSP upwards and downwards. The base member is detachably attached to a front surface of the GSP. The base member includes one or more cleansing members for cleansing a user's body part during the movement of the GSP upwards and downwards.



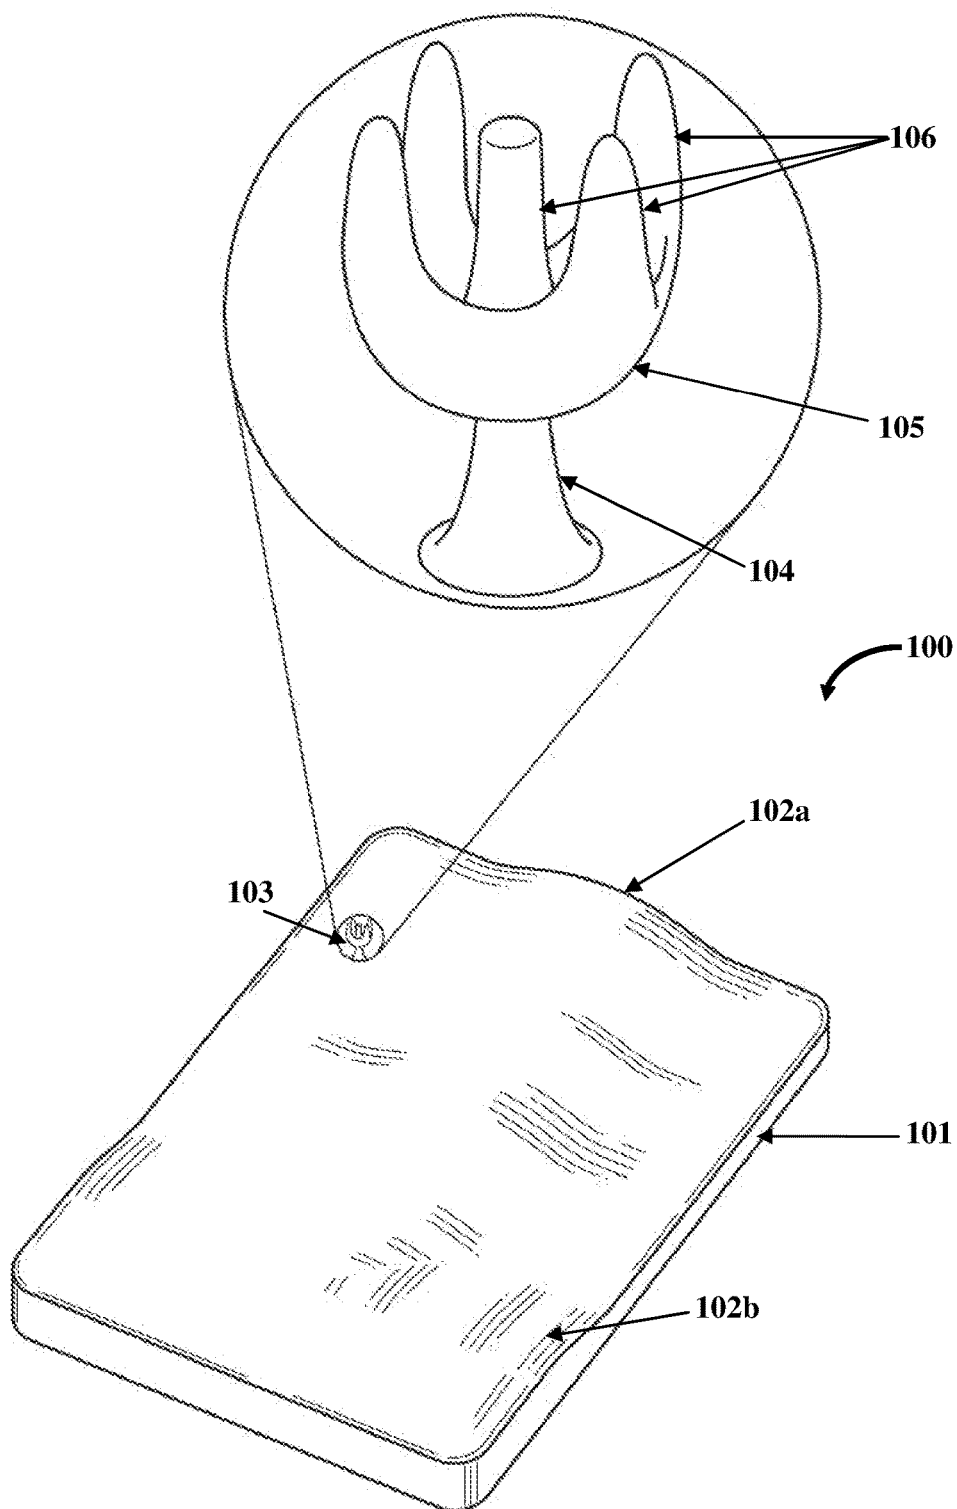


FIG. 1

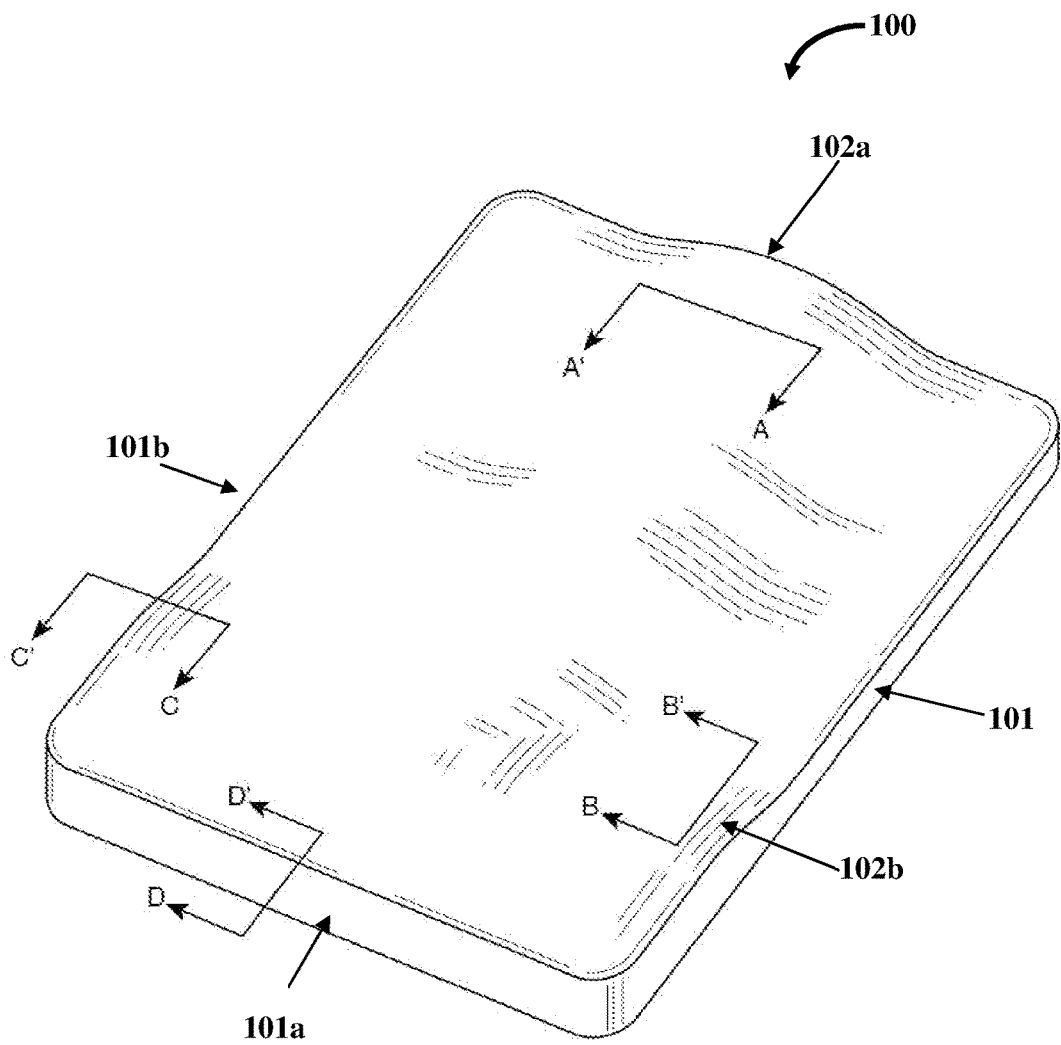


FIG. 2

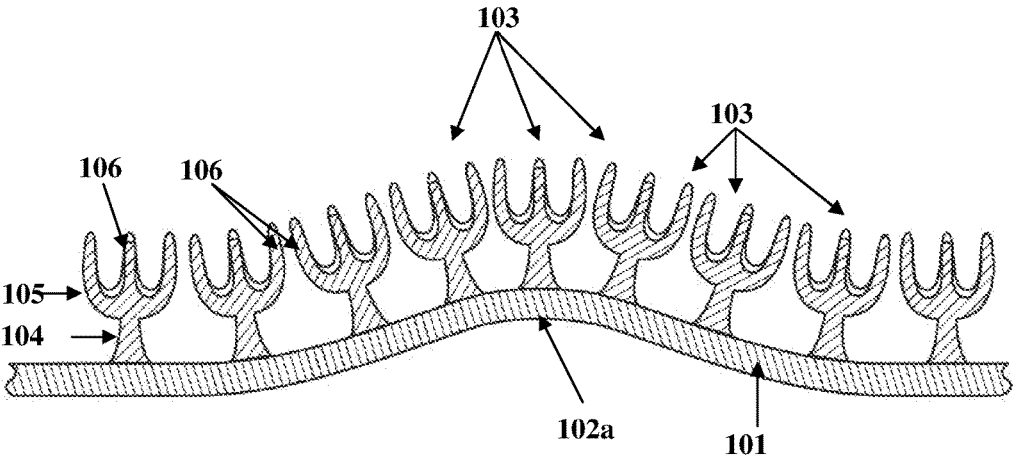


FIG. 3A

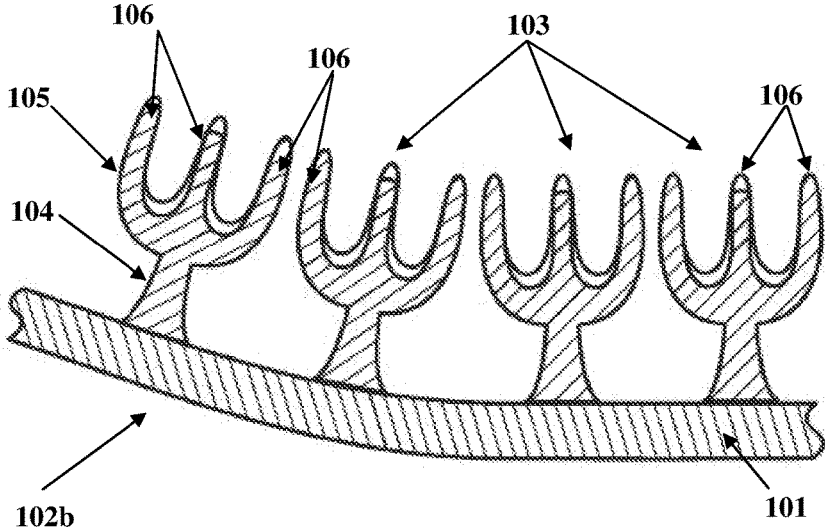


FIG. 3B

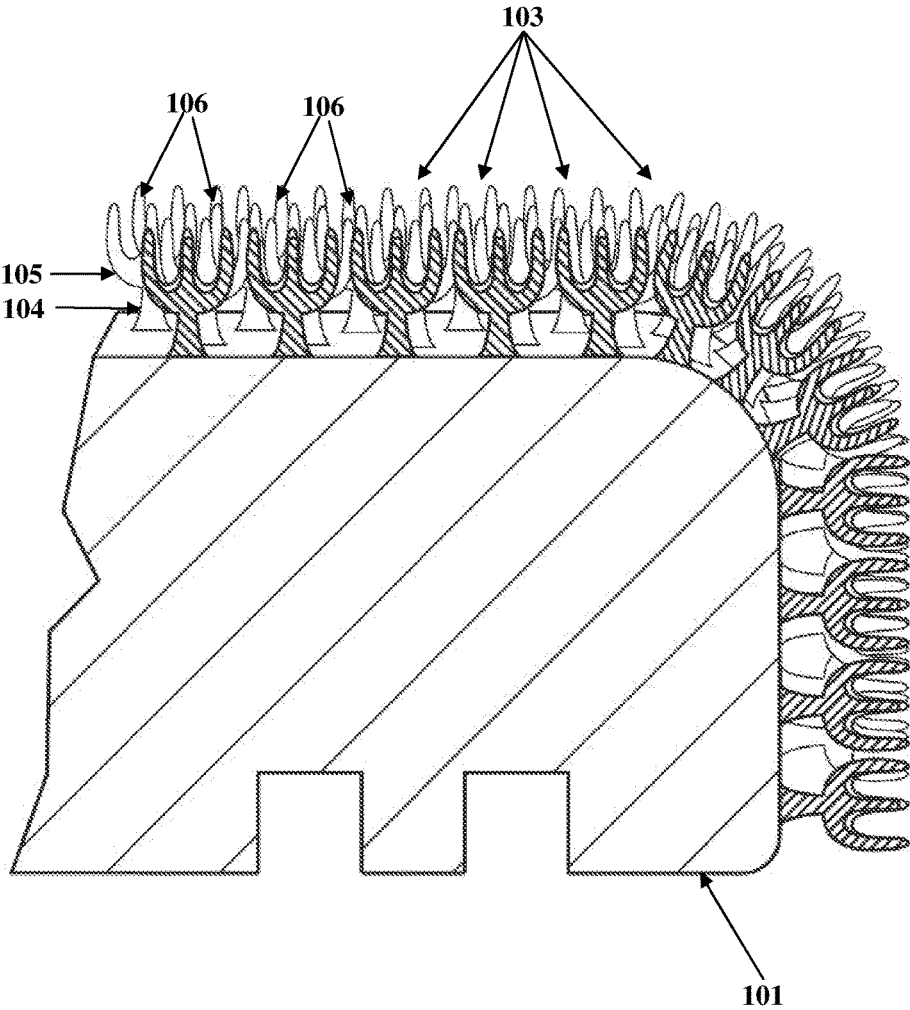


FIG. 3C

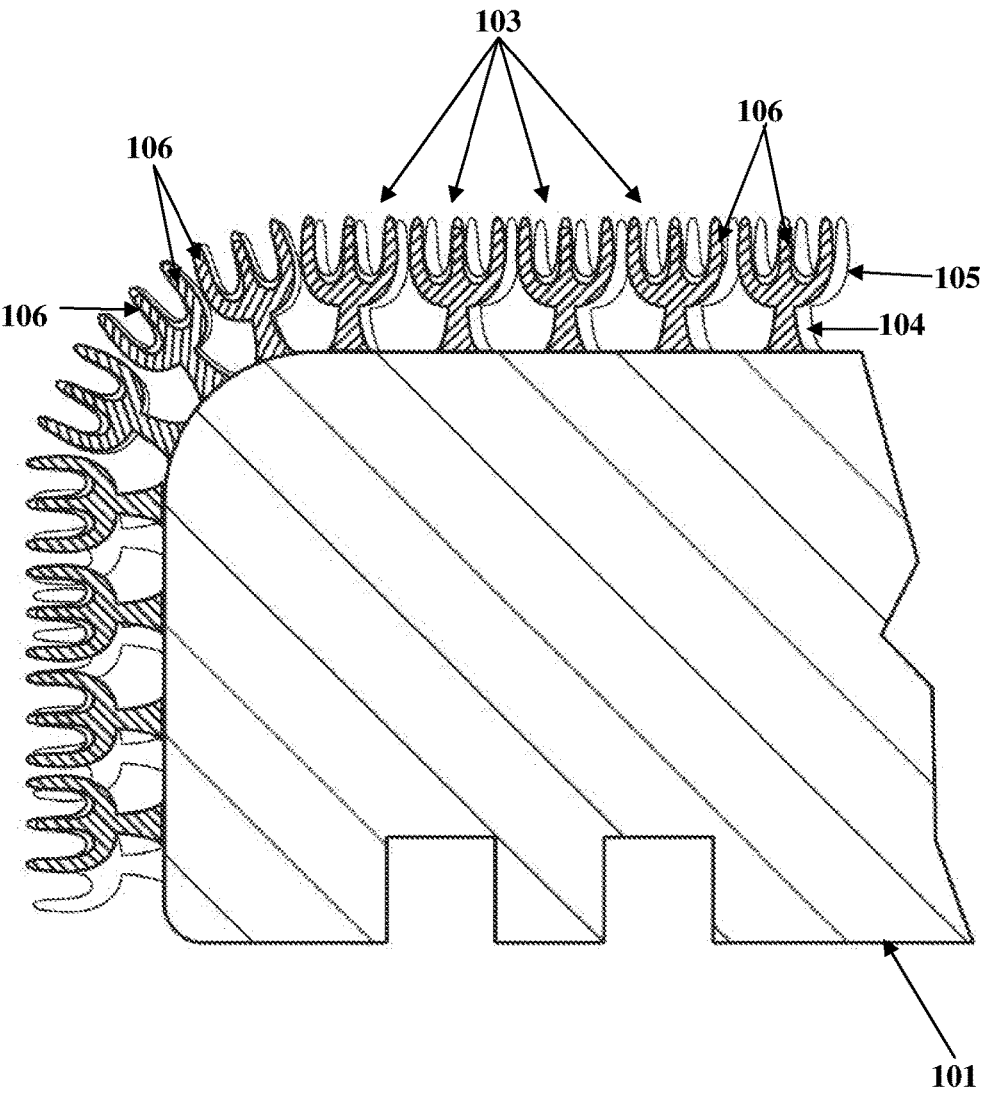


FIG. 3D

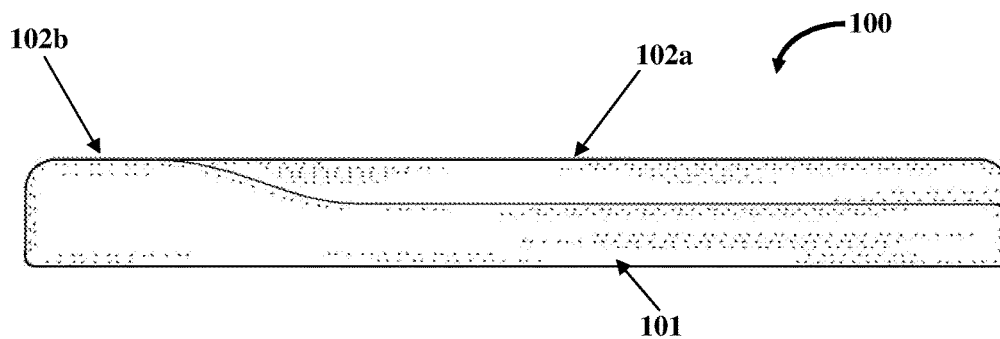


FIG. 4

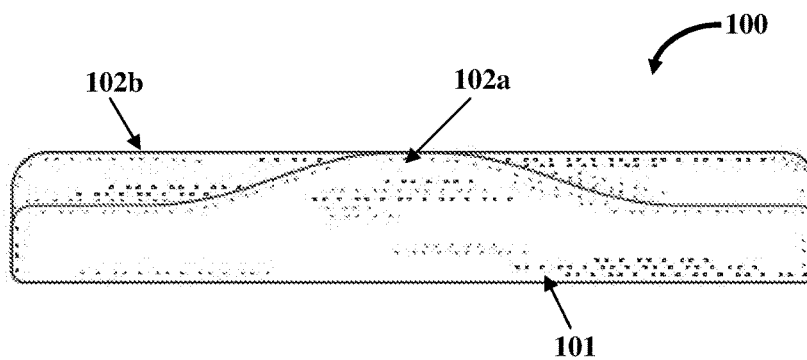


FIG. 5

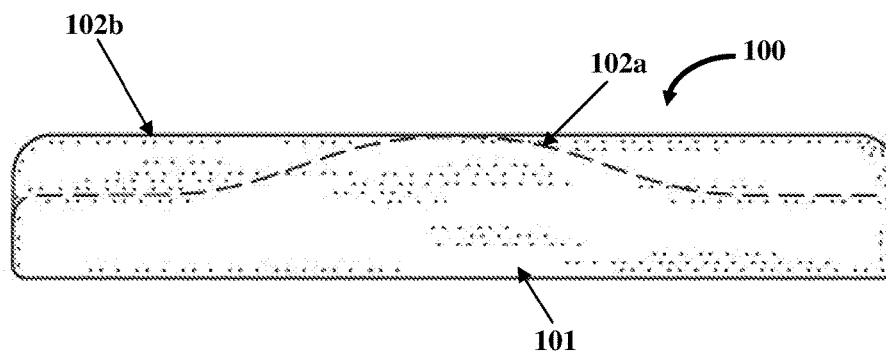


FIG. 6

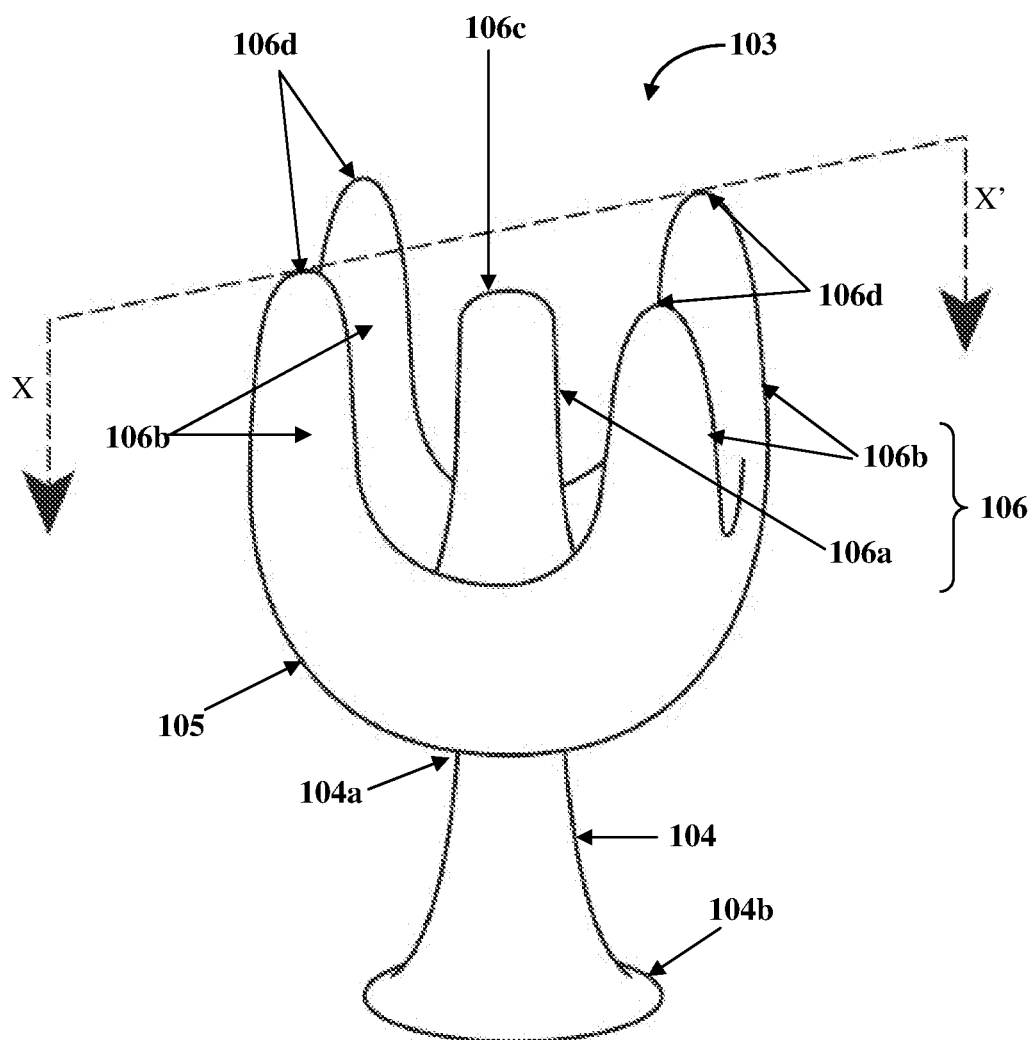


FIG. 7

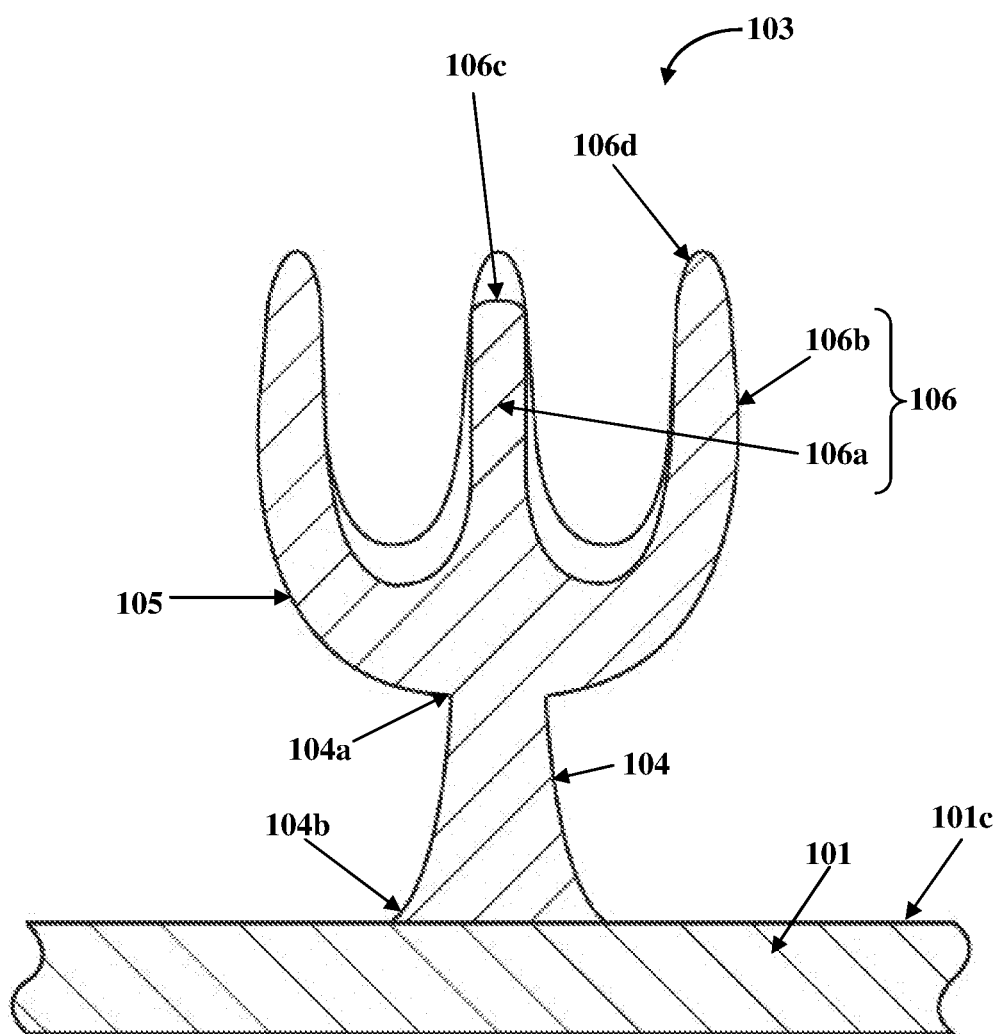


FIG. 8

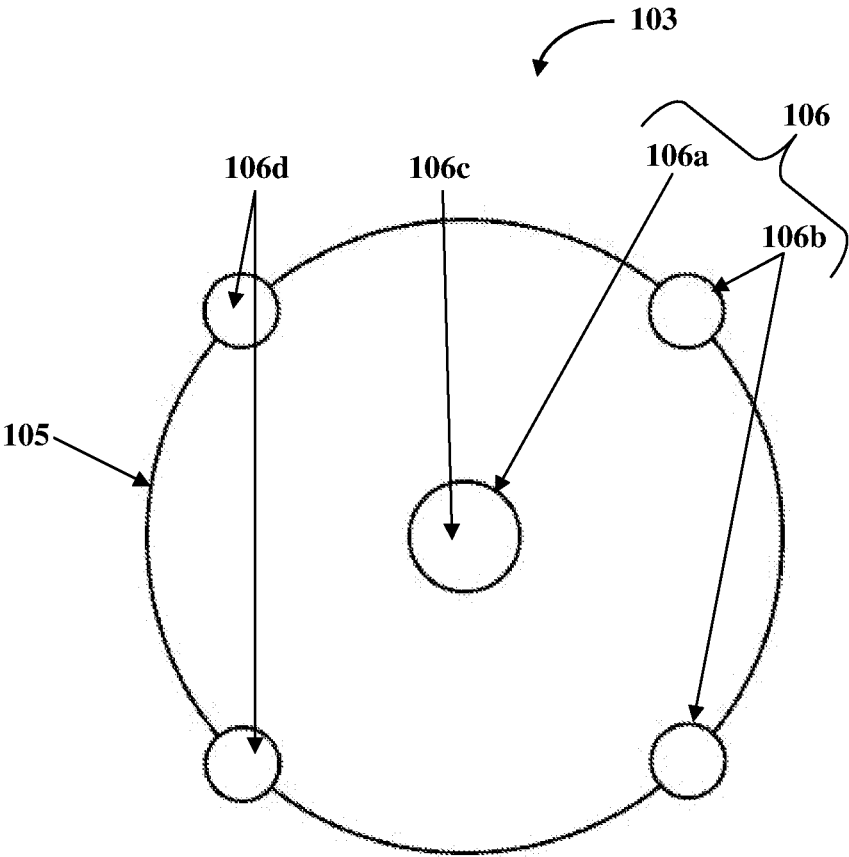


FIG. 9

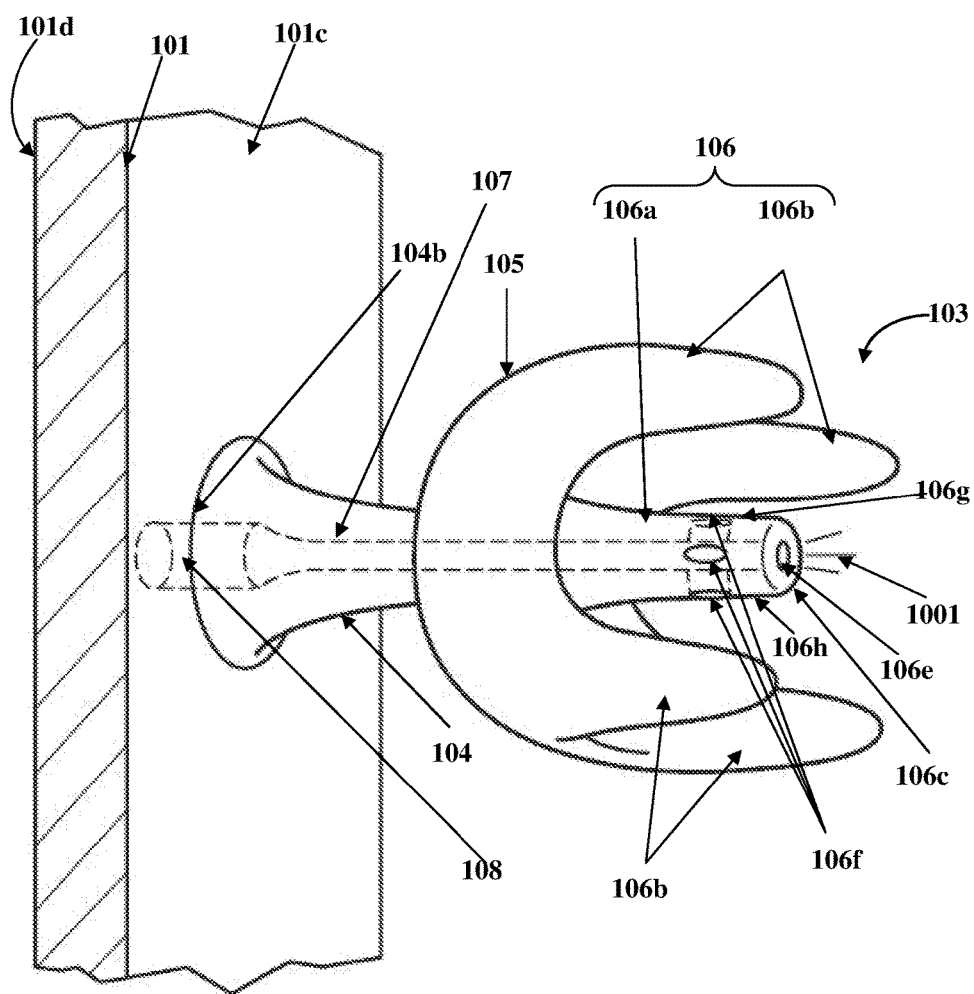


FIG. 10A

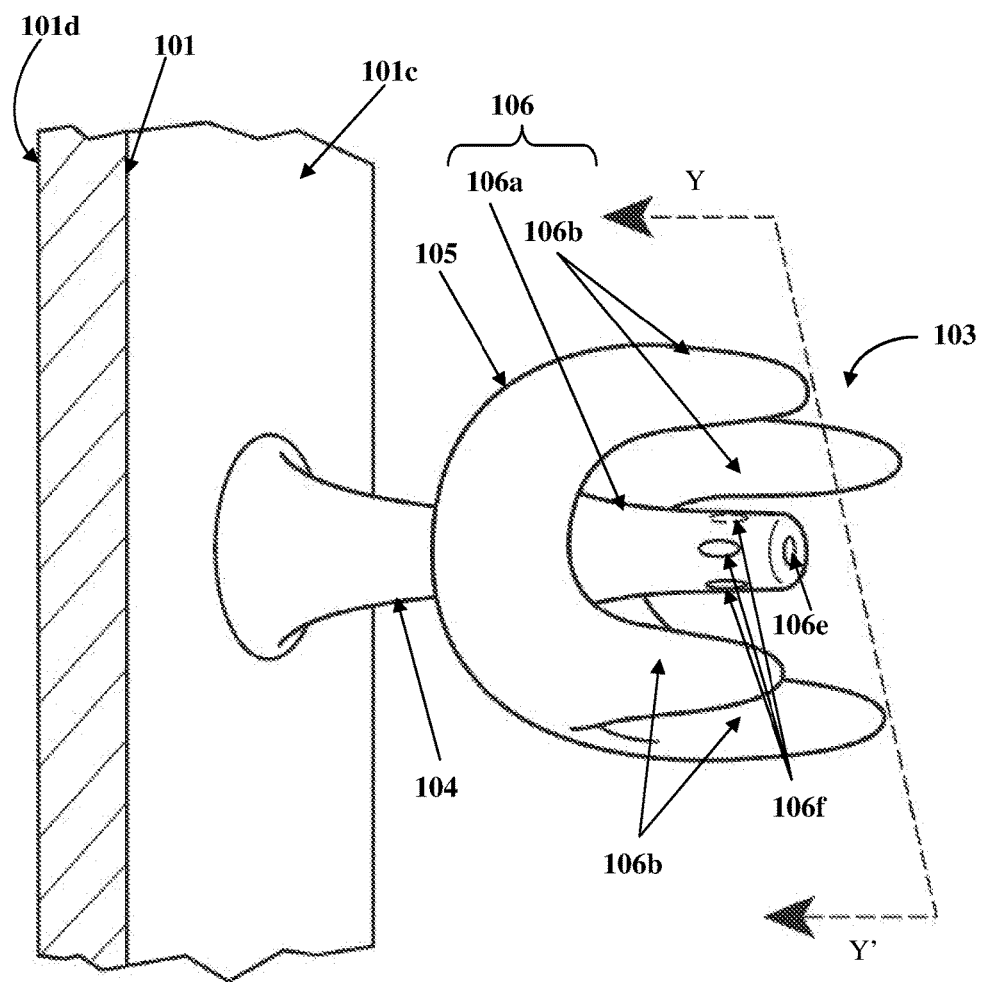


FIG. 10B

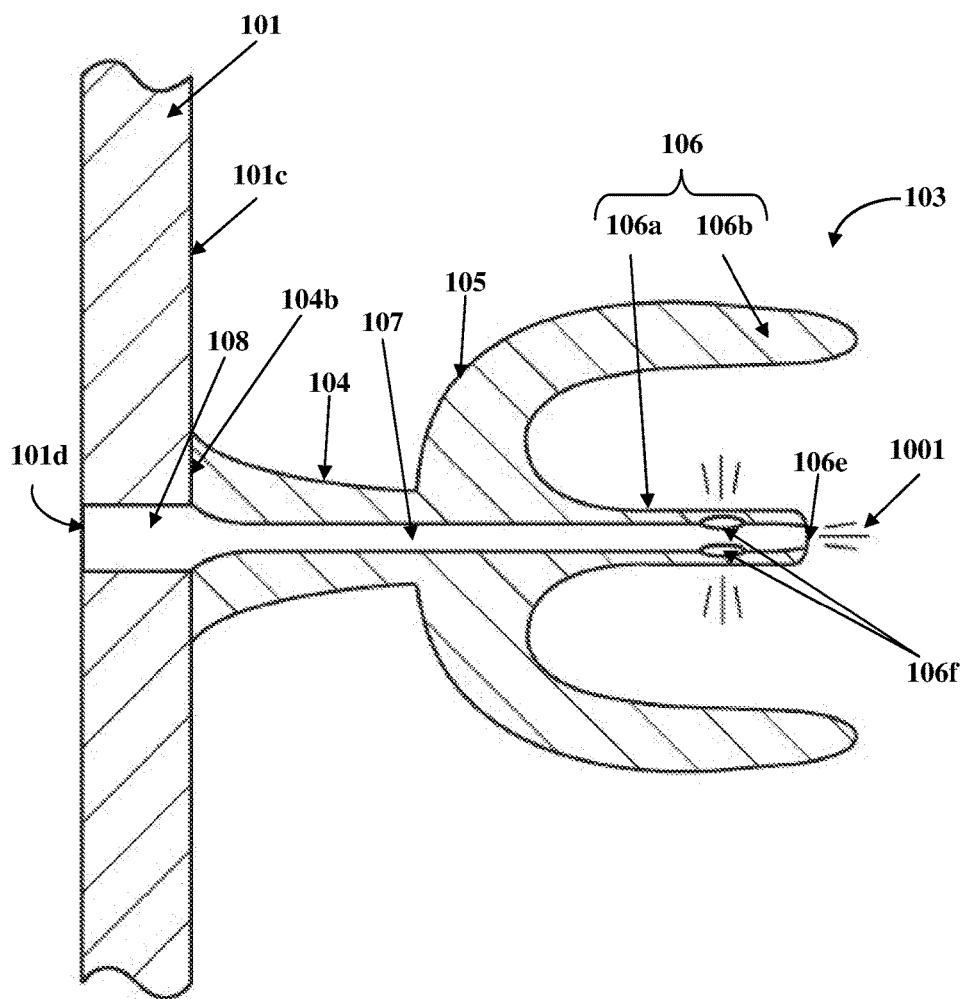


FIG. 10C

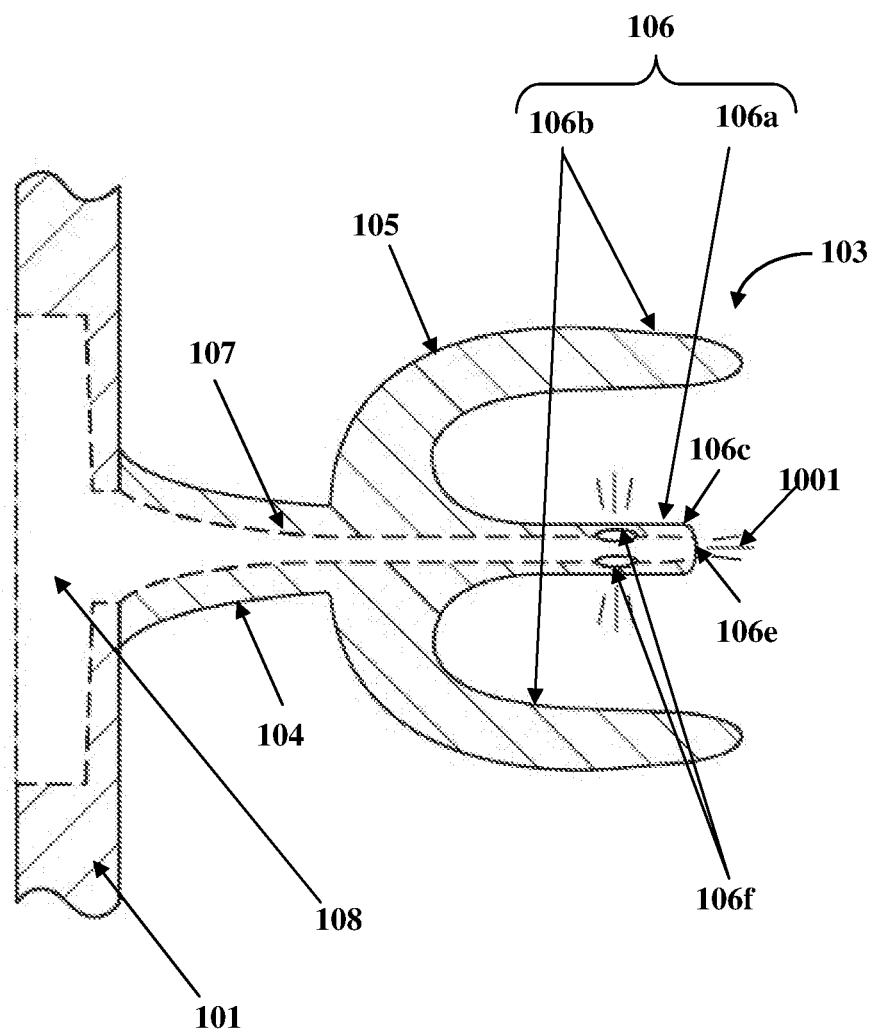


FIG. 11

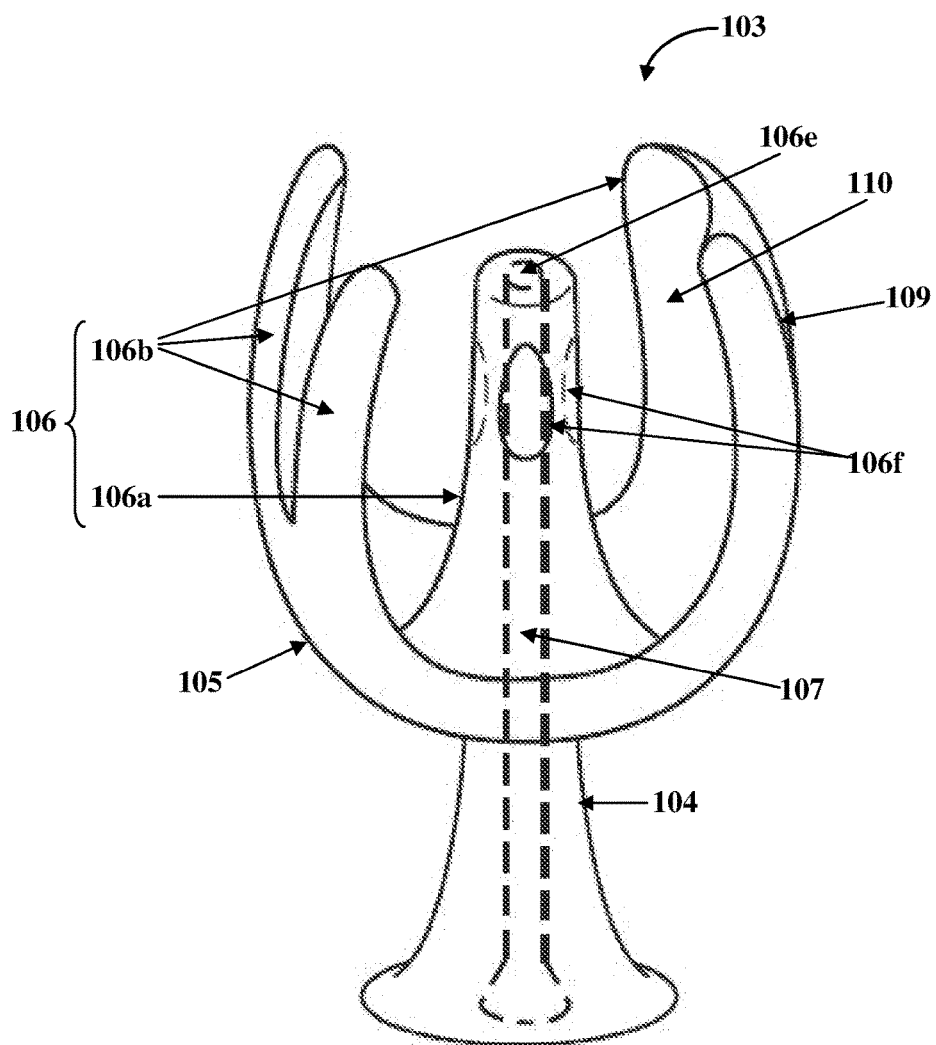


FIG. 12A

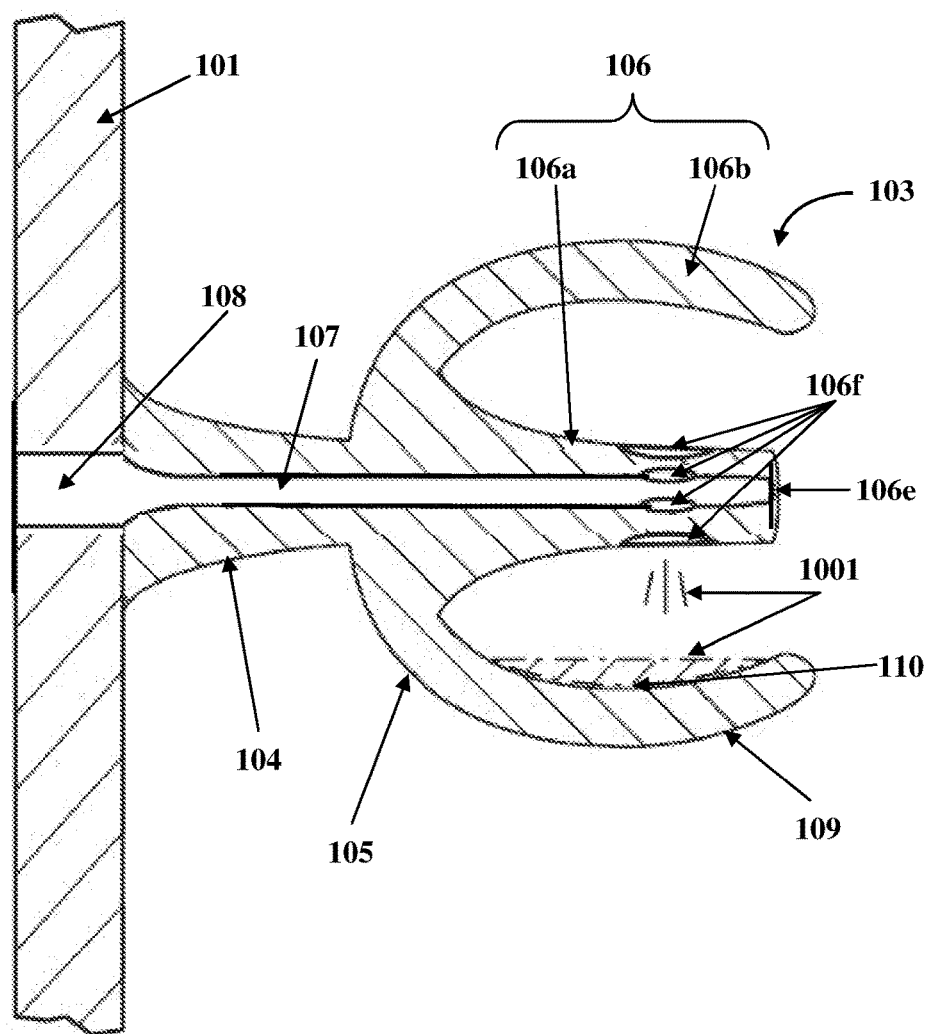


FIG. 12B

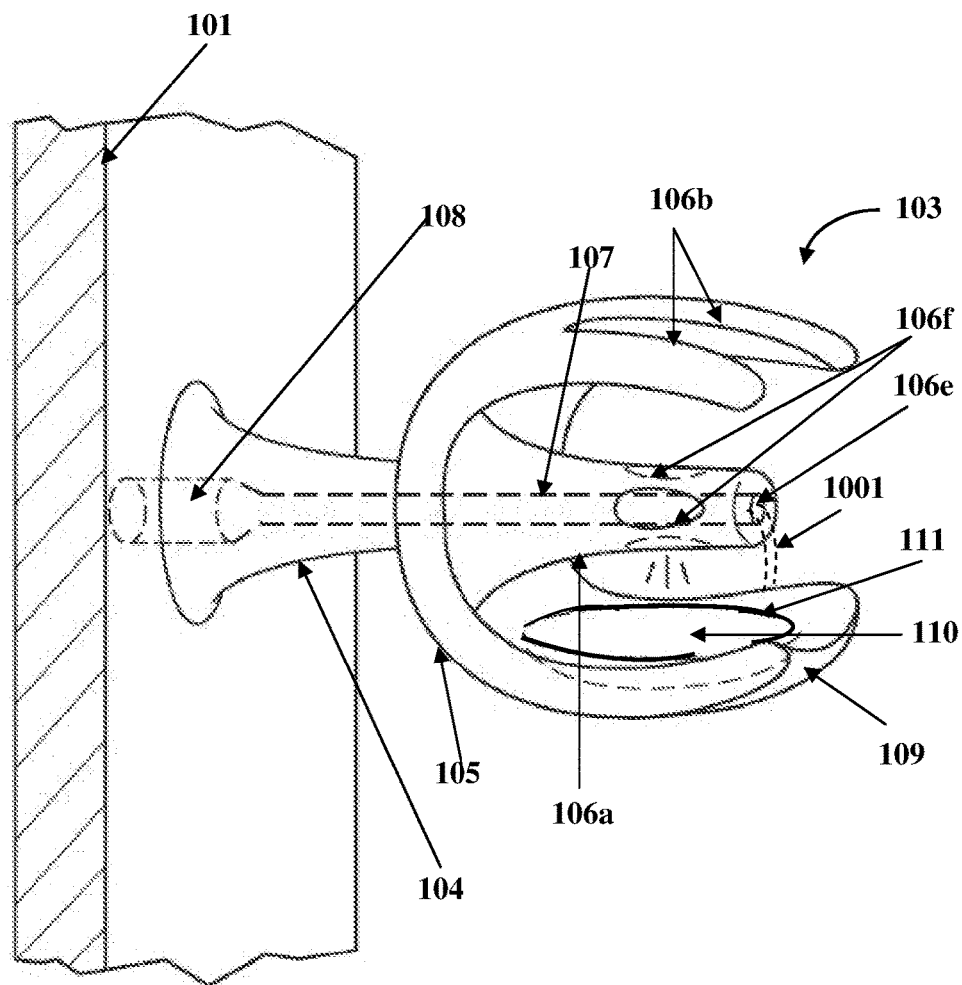


FIG. 13

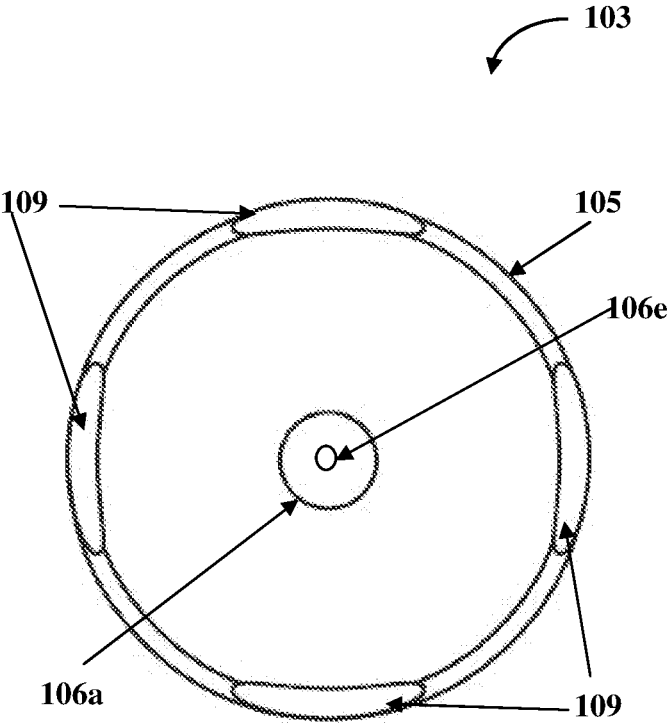


FIG. 14

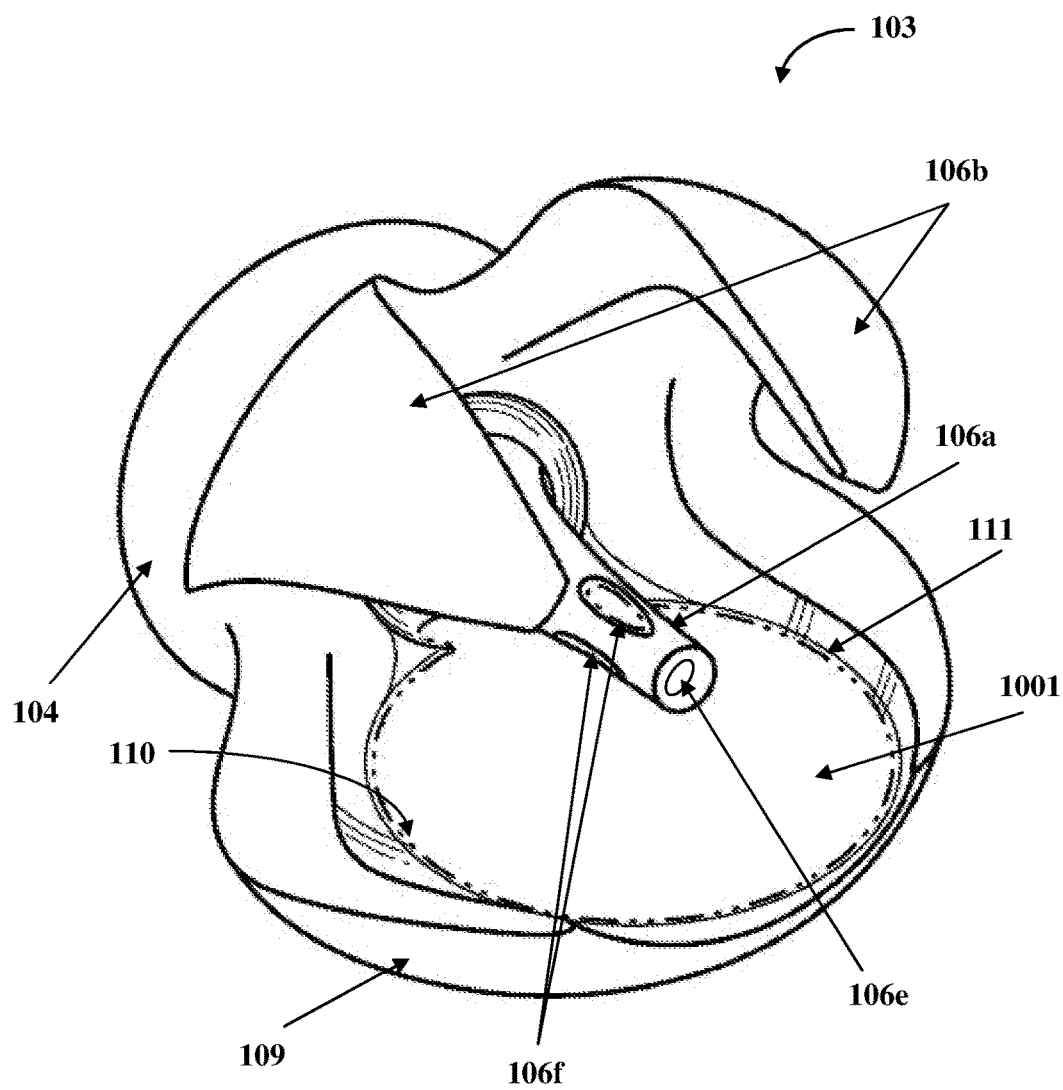


FIG. 15

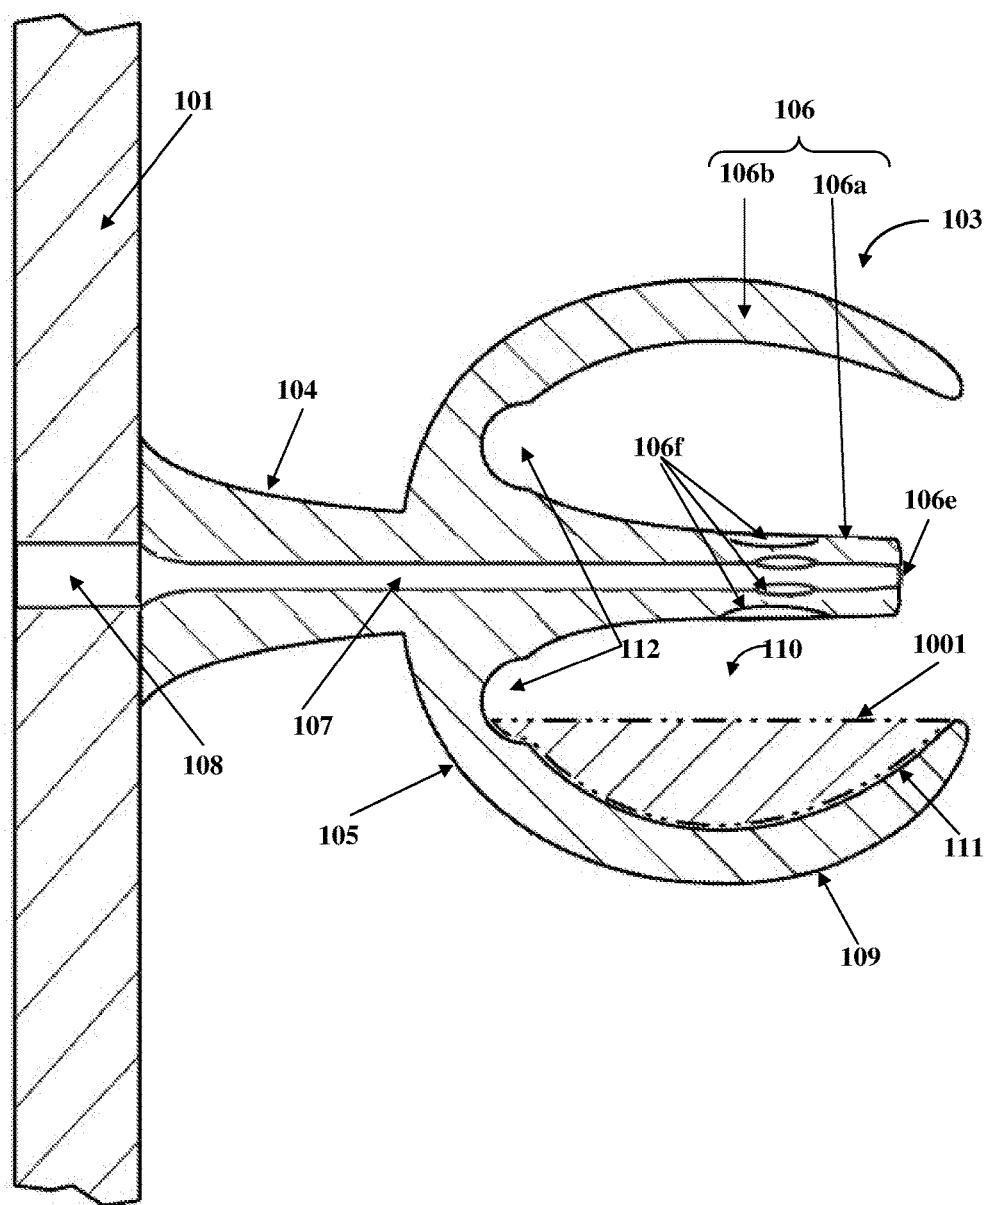
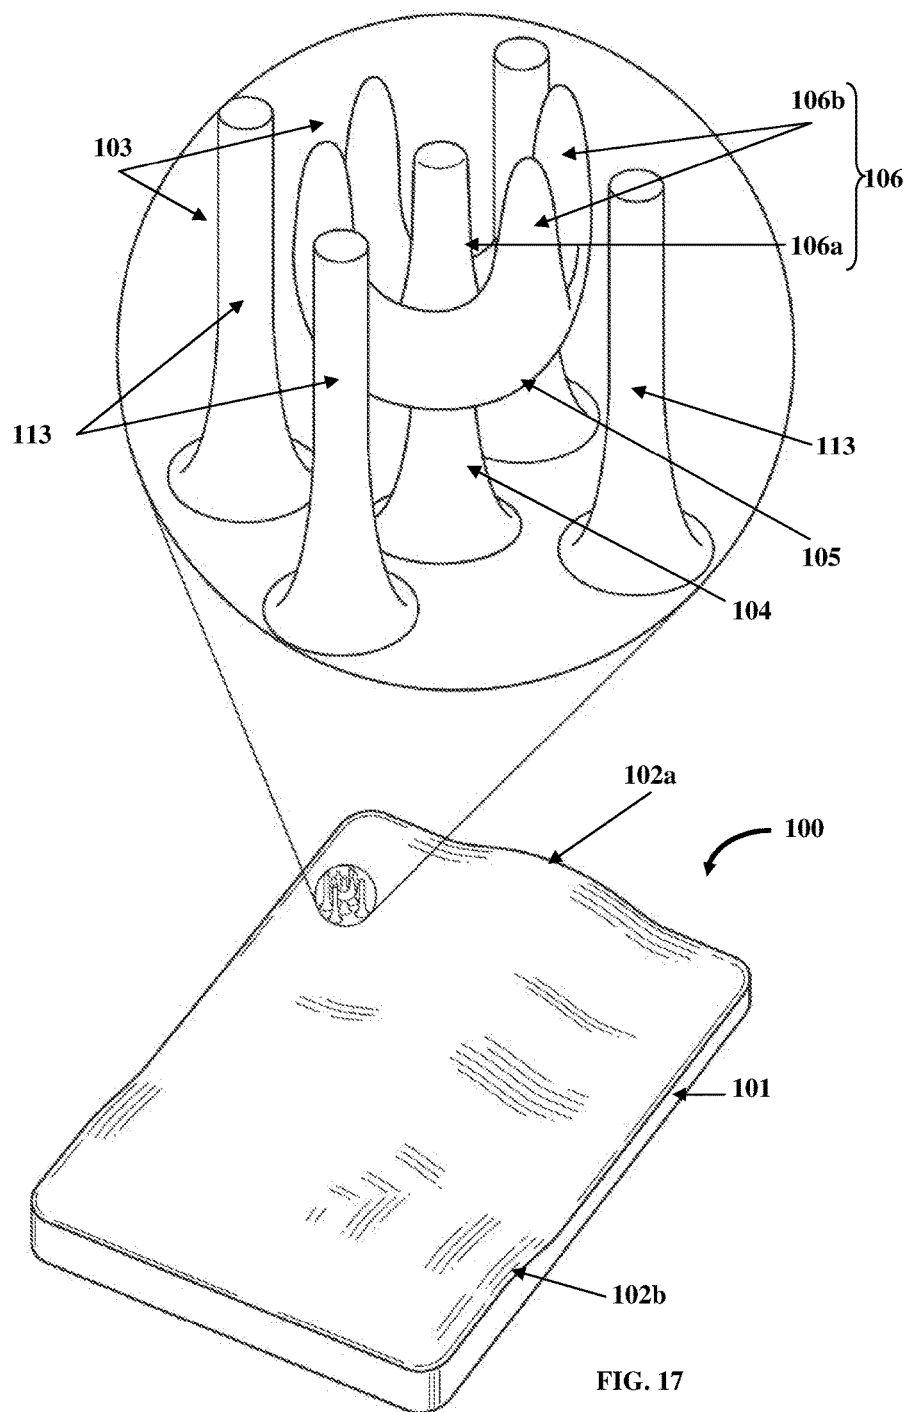


FIG. 16



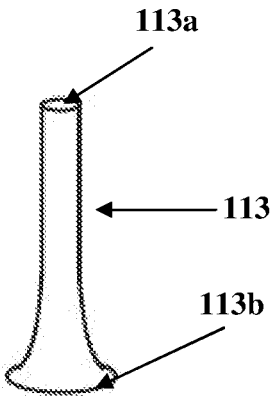


FIG. 18

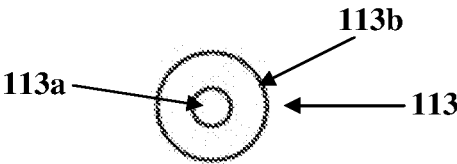


FIG. 19

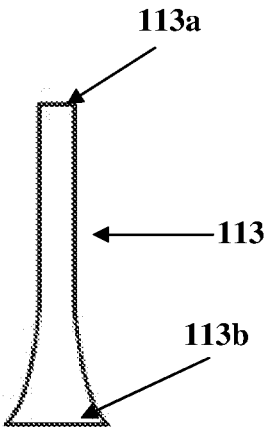


FIG. 20

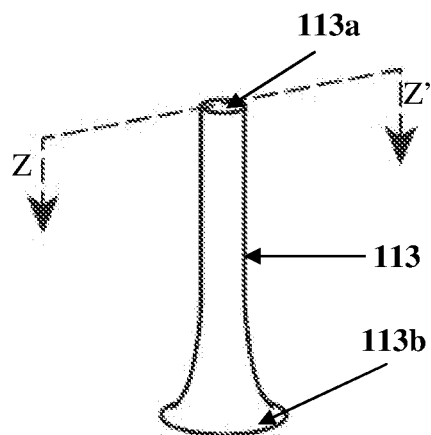


FIG. 21

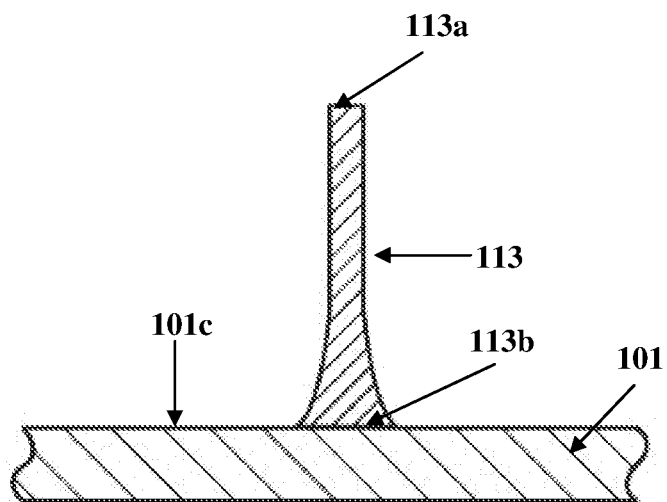


FIG. 22

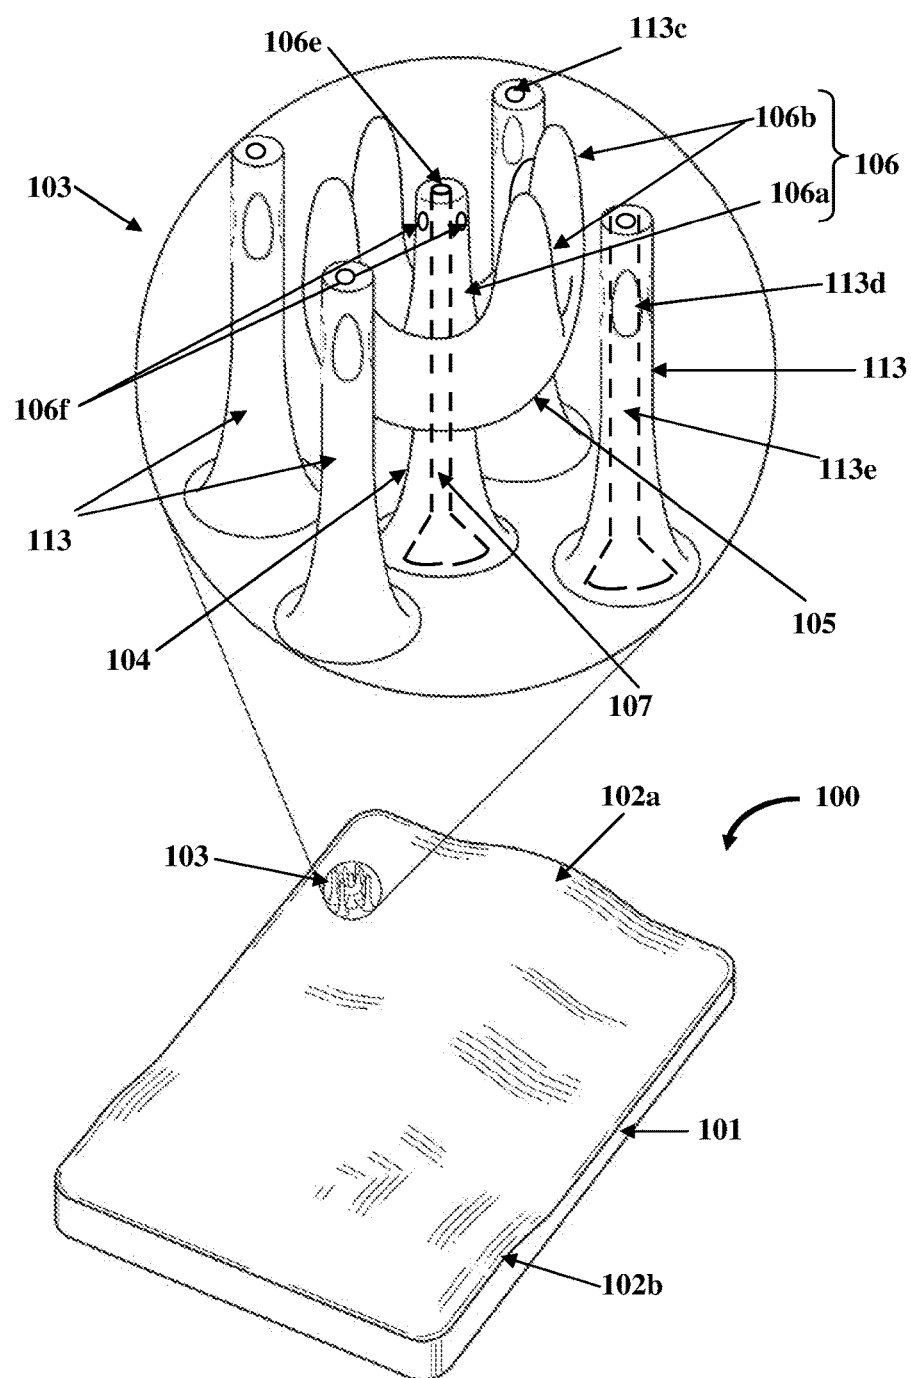


FIG. 23

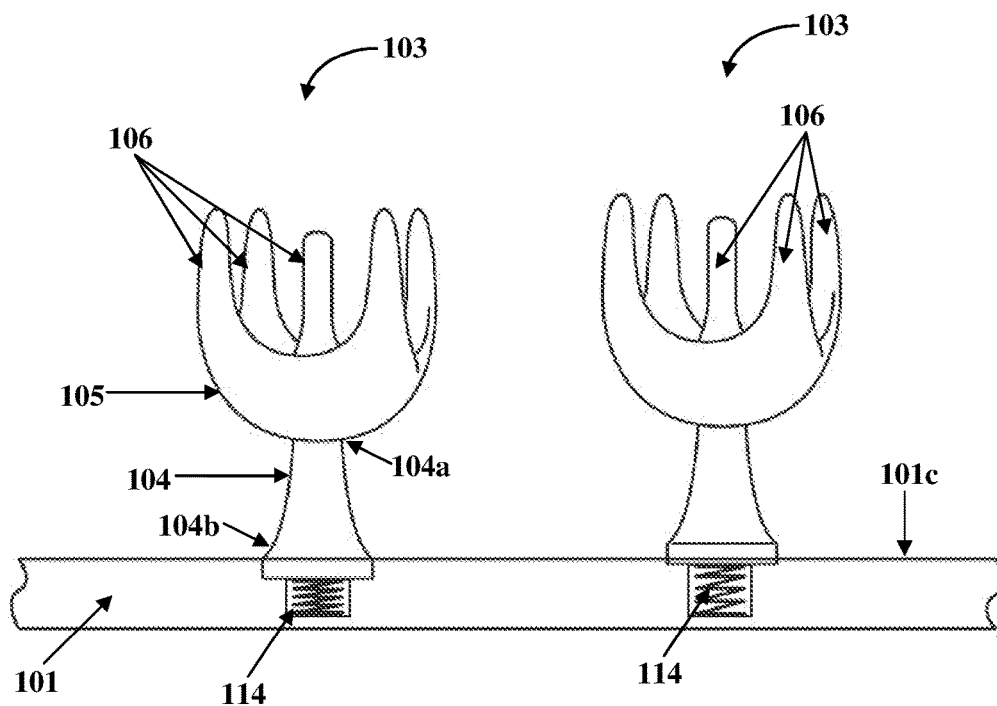


FIG. 24A

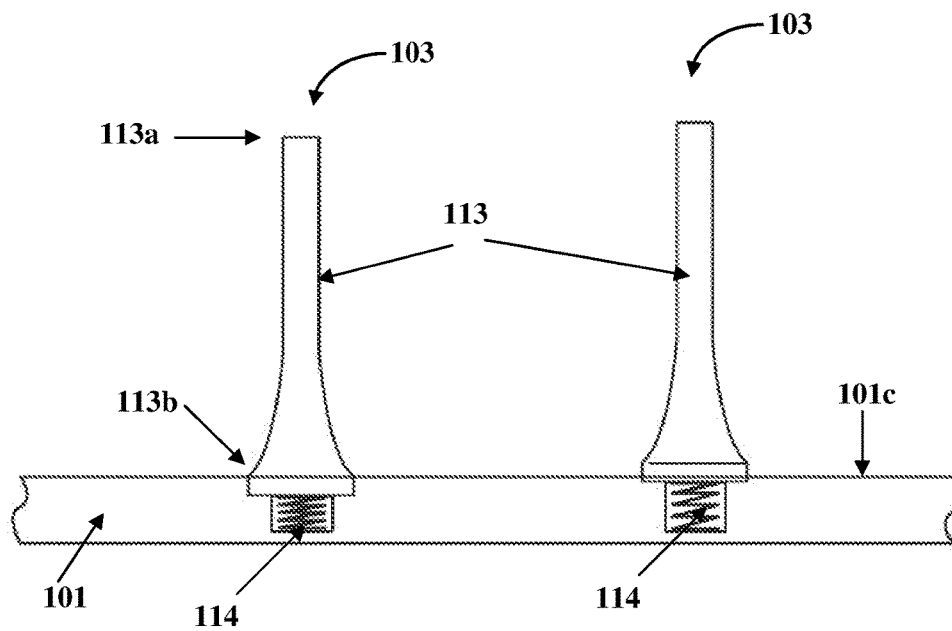


FIG. 24B

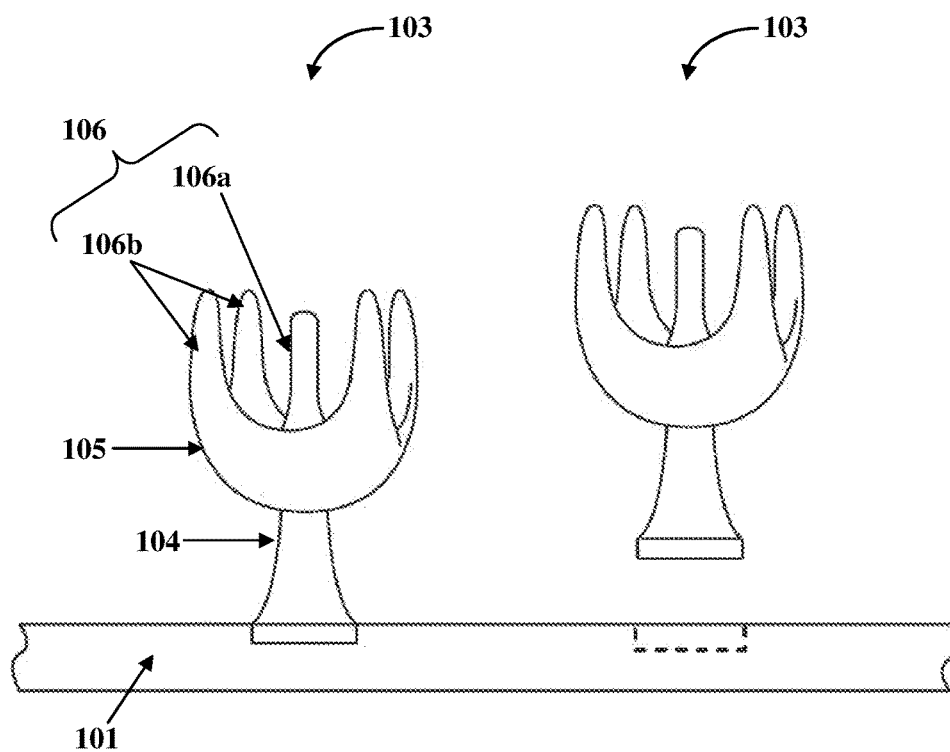


FIG. 25

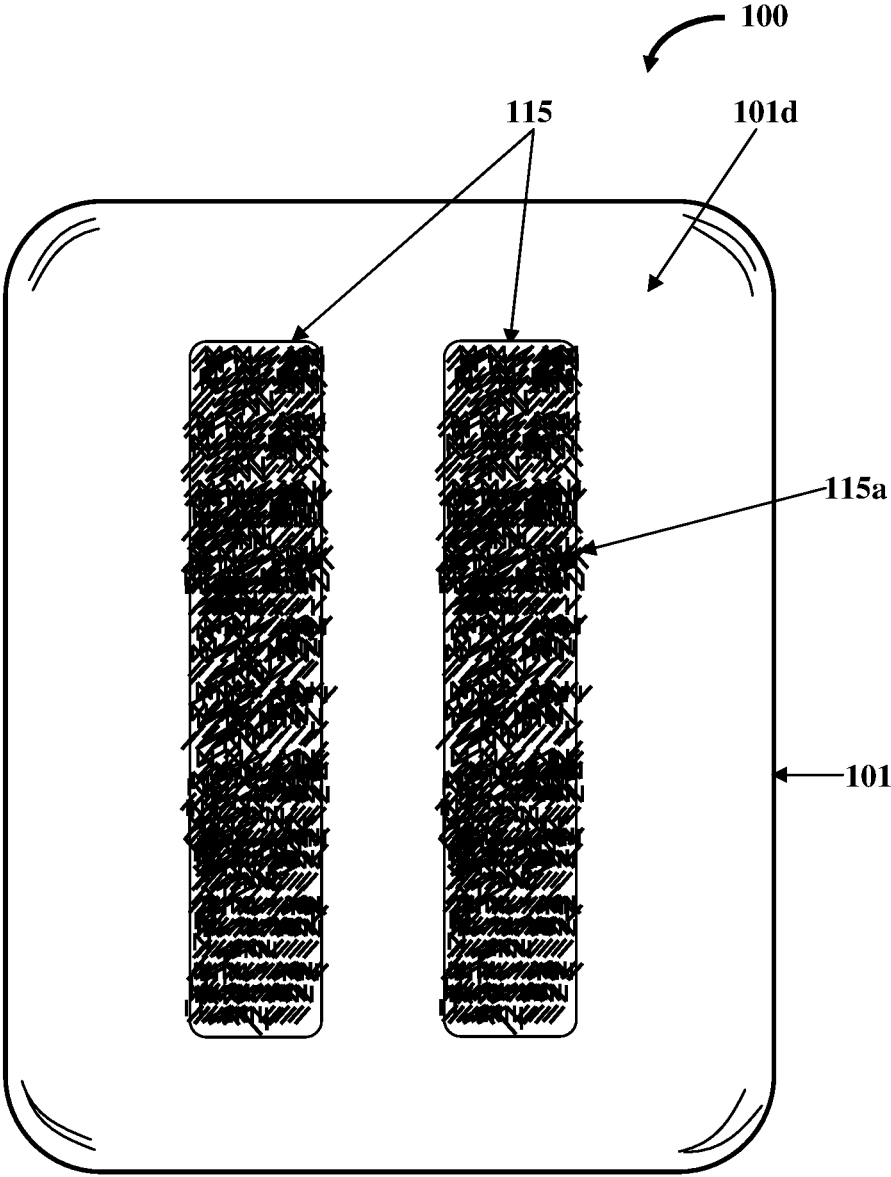


FIG. 26

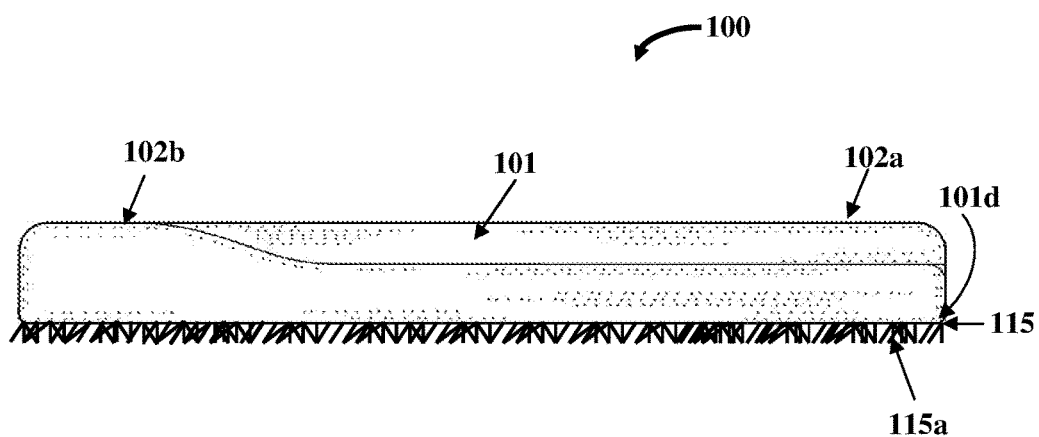


FIG. 27

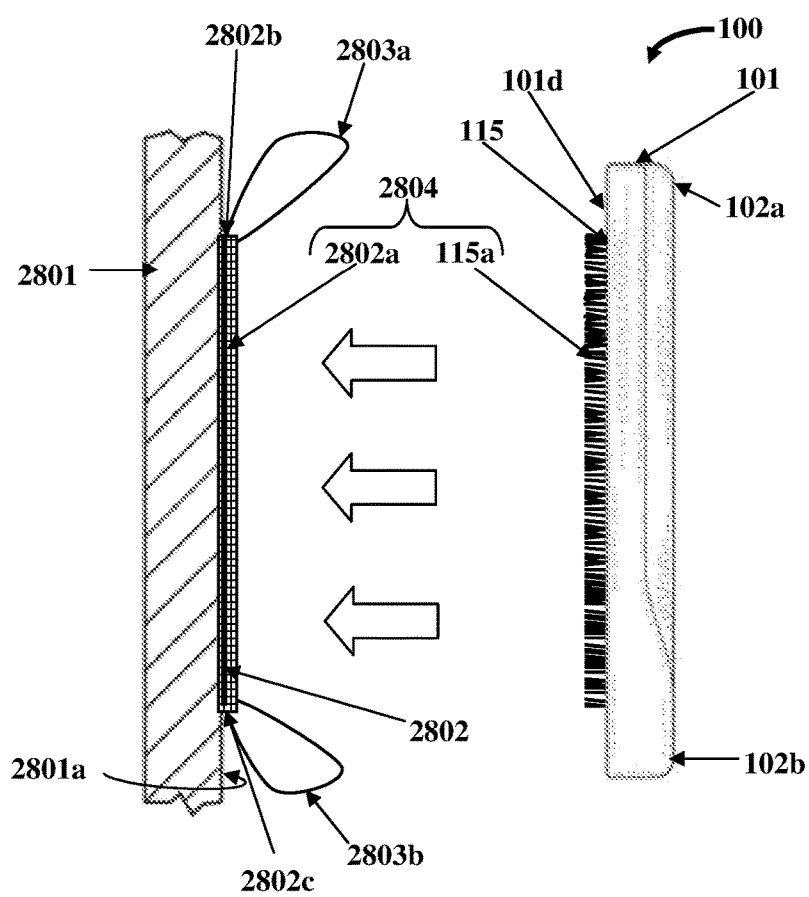


FIG. 28

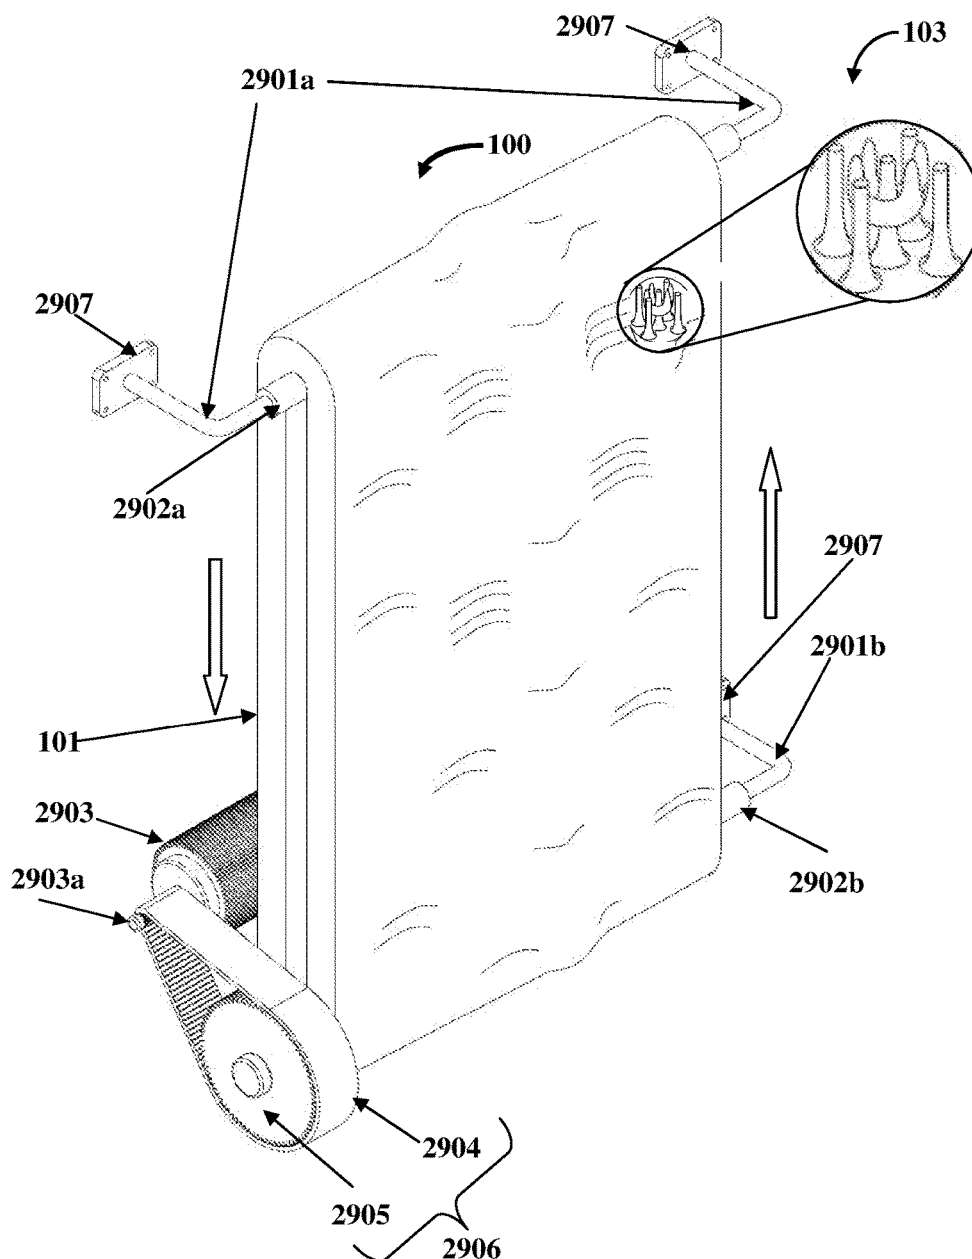


FIG. 29

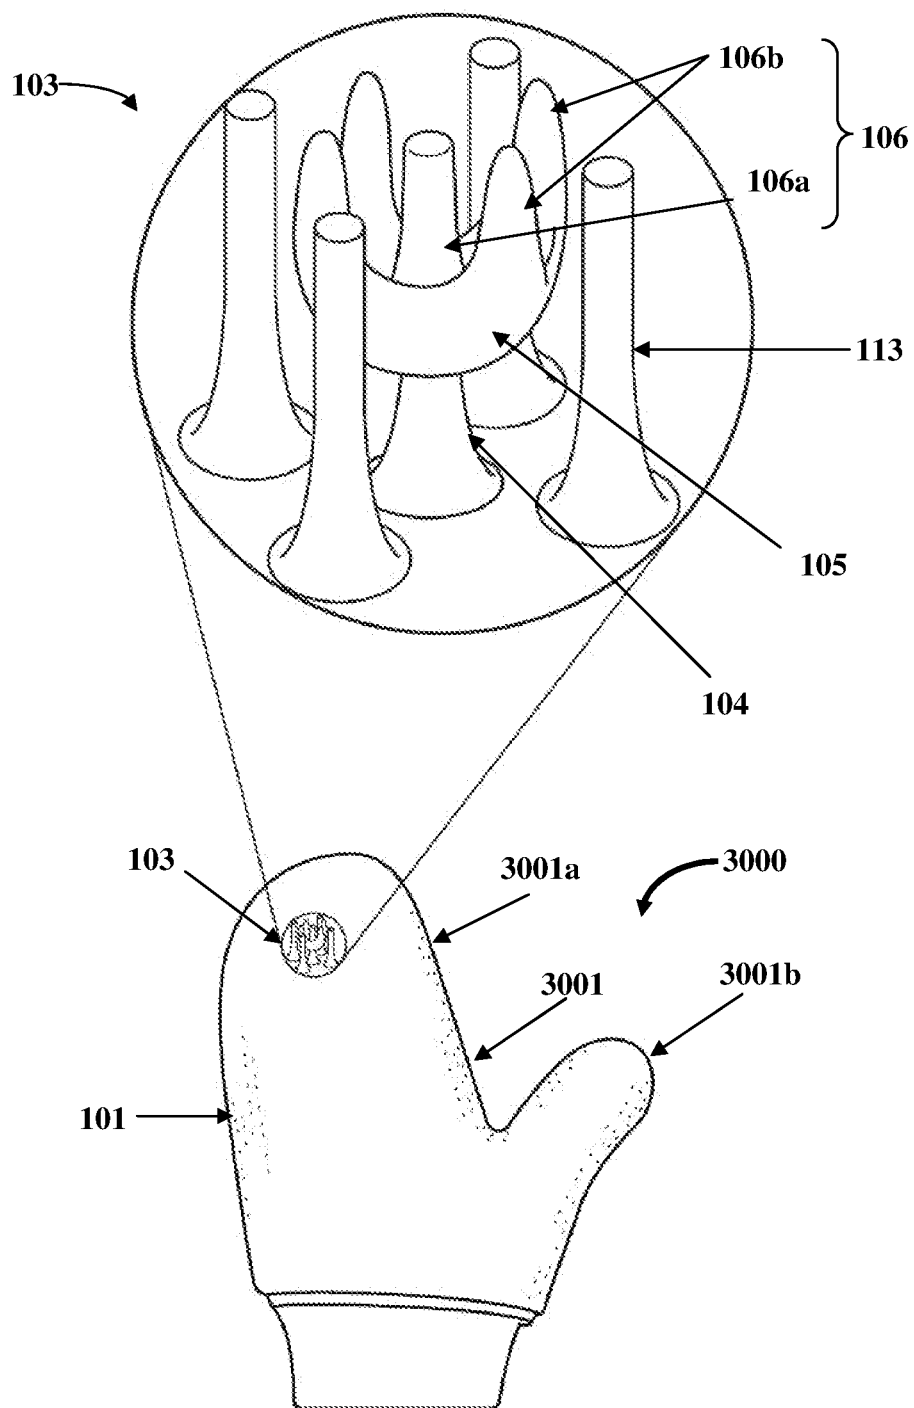


FIG. 30

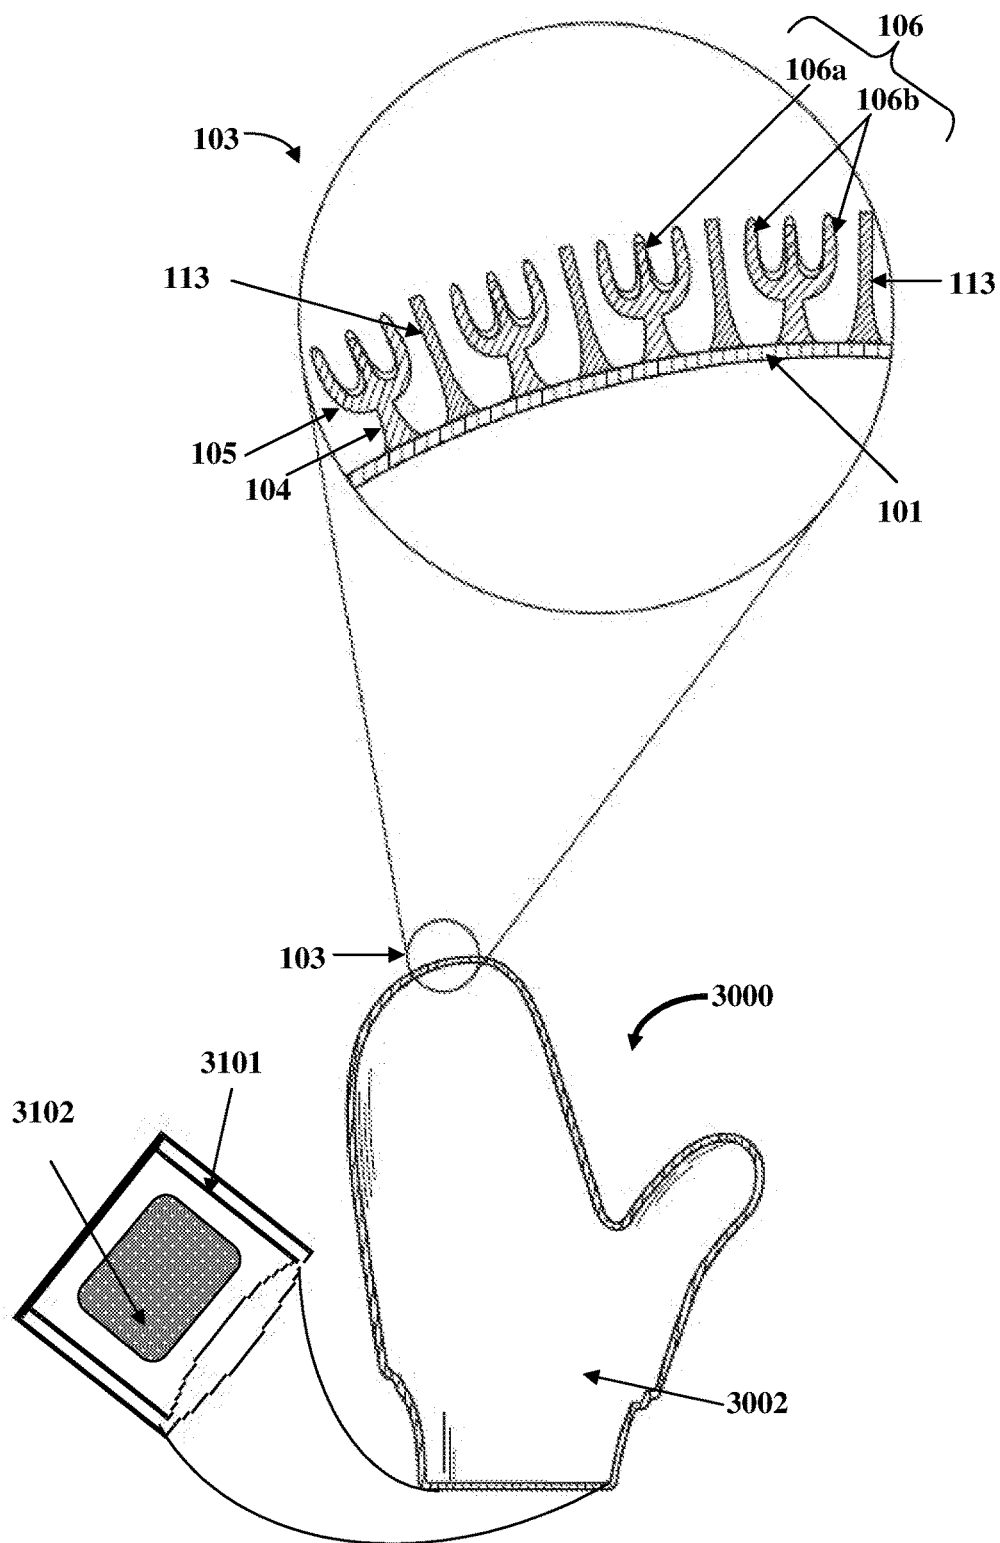


FIG. 31

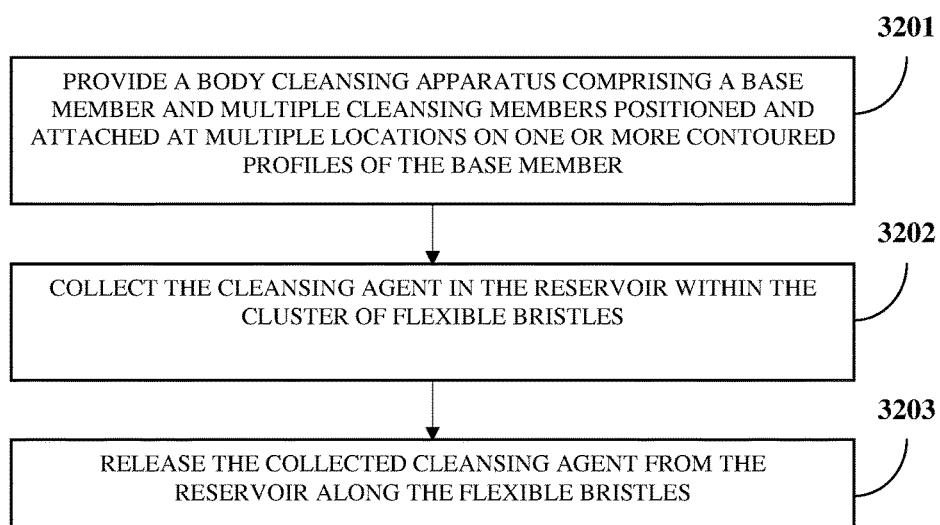


FIG. 32

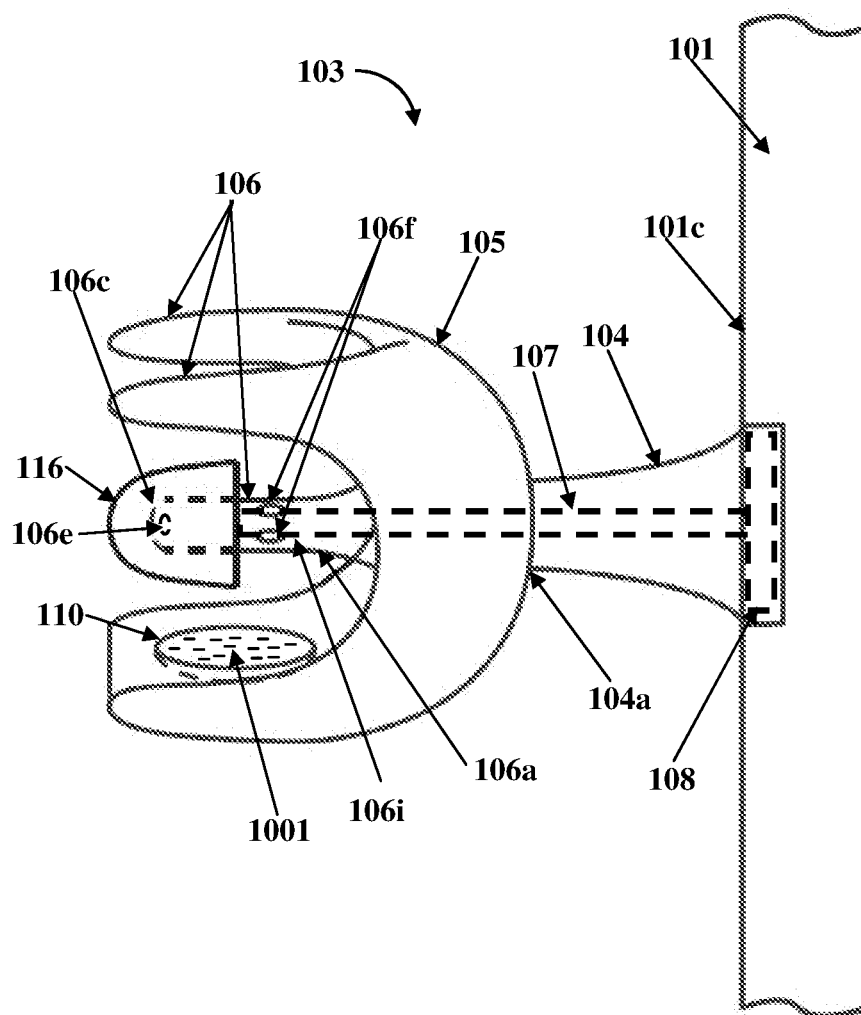


FIG. 33

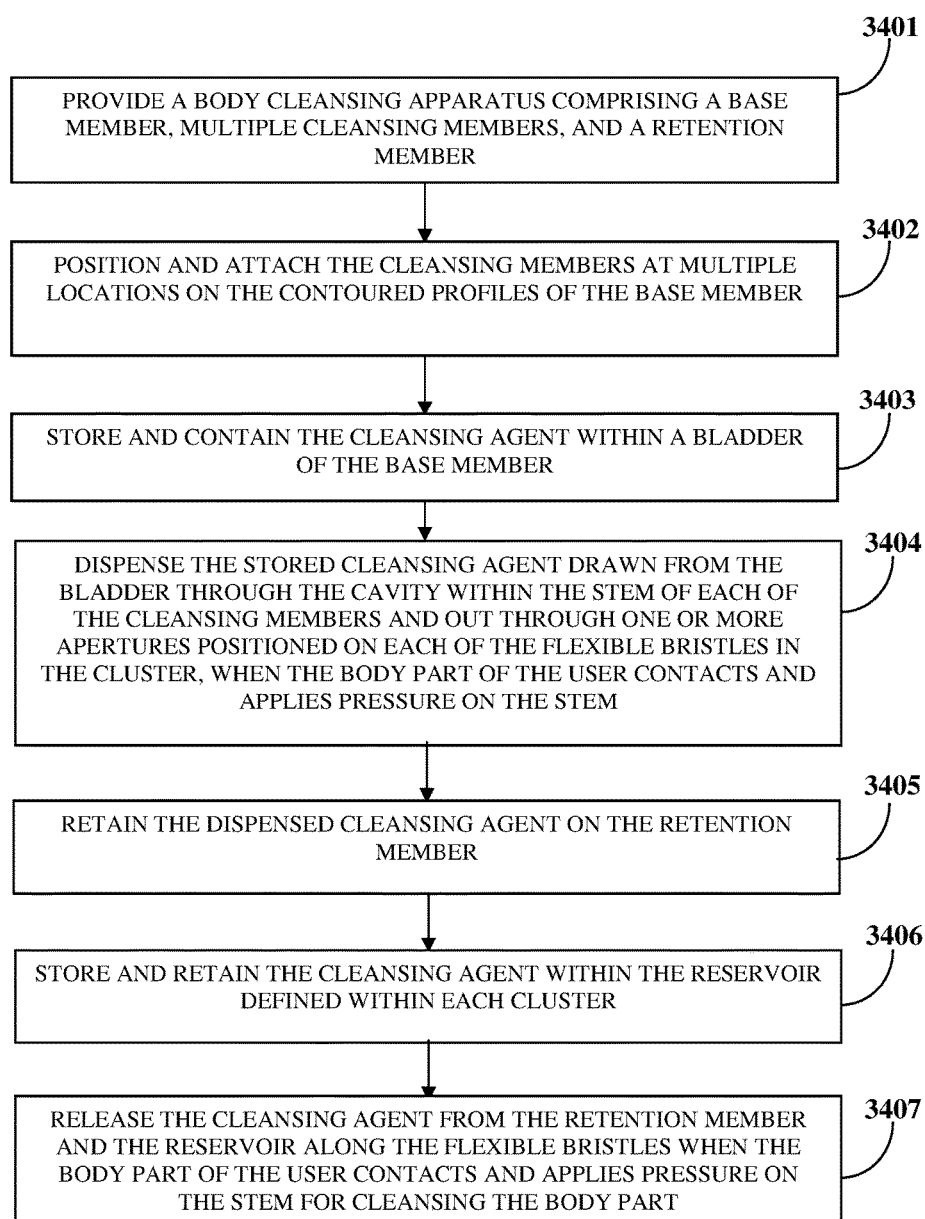


FIG. 34

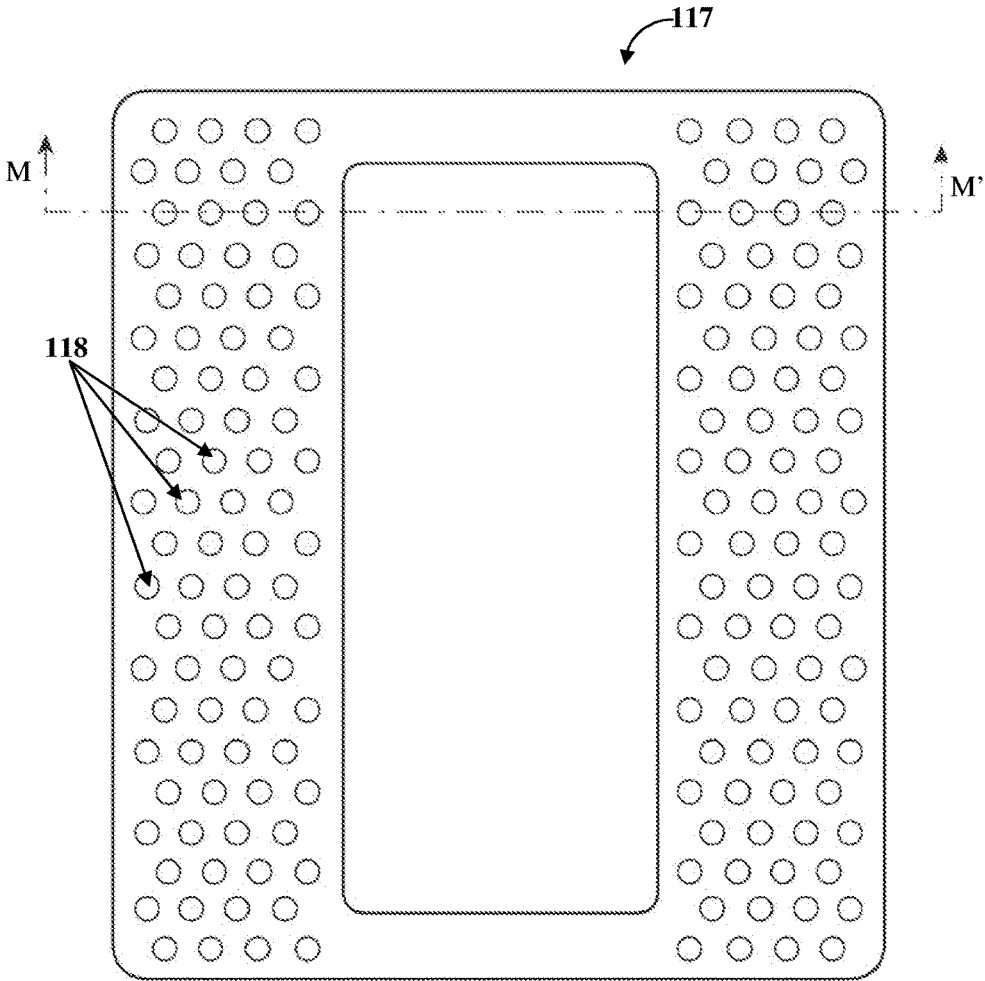


FIG. 35A

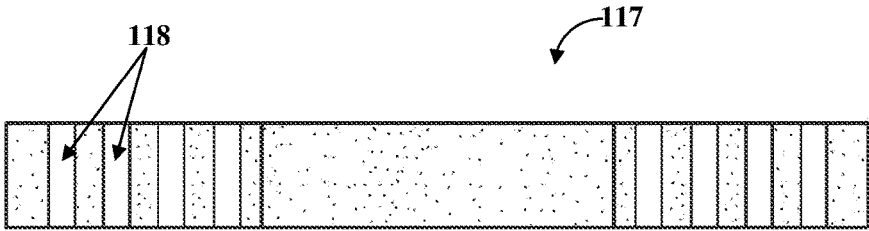


FIG. 35B

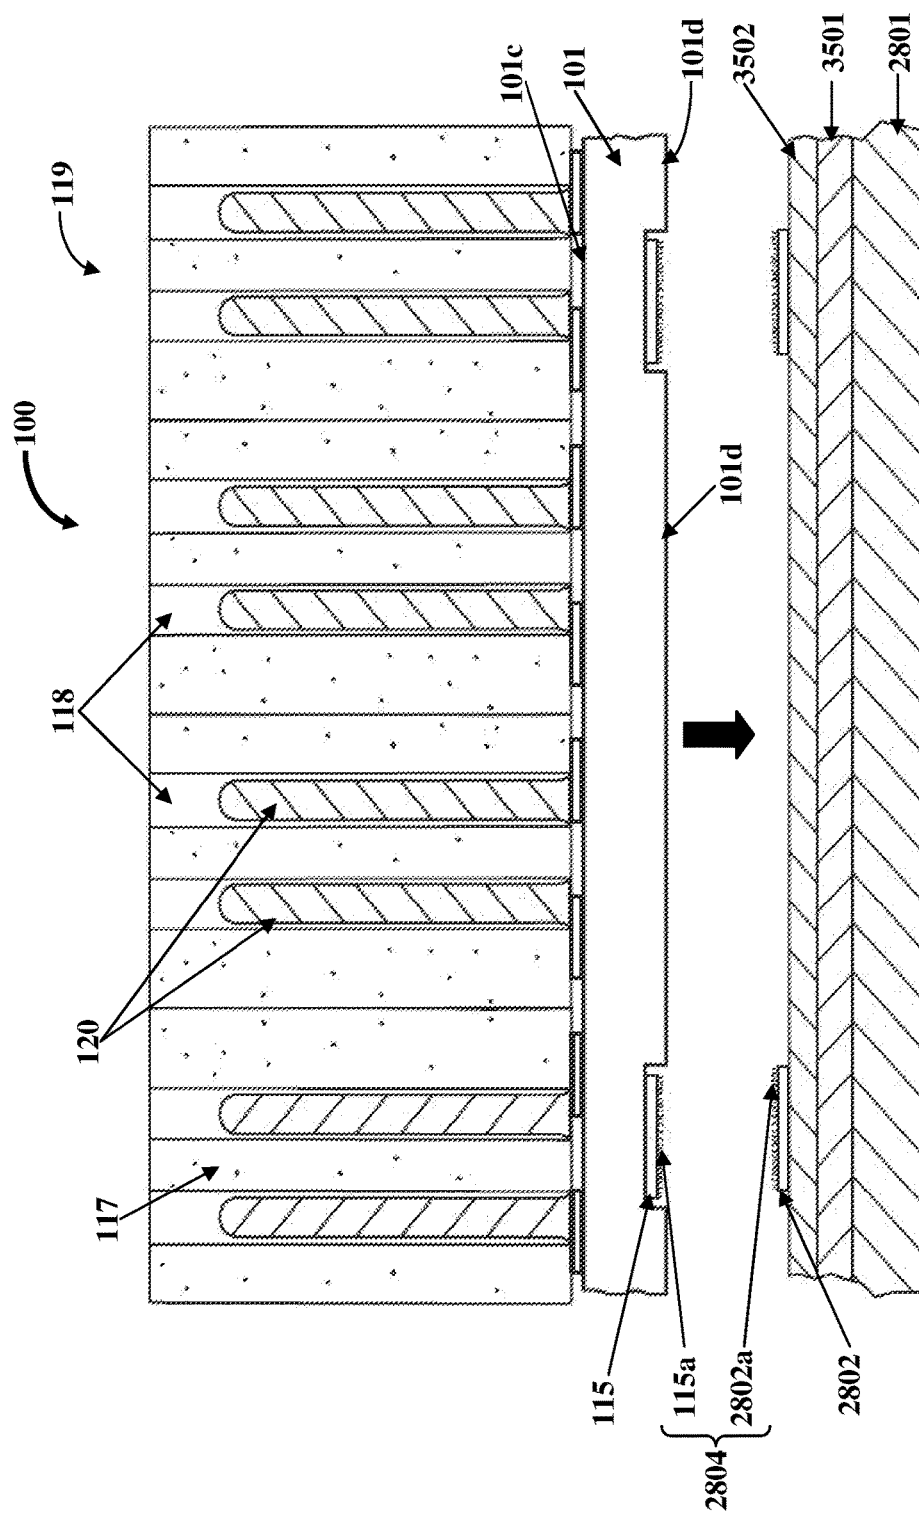


FIG. 35C

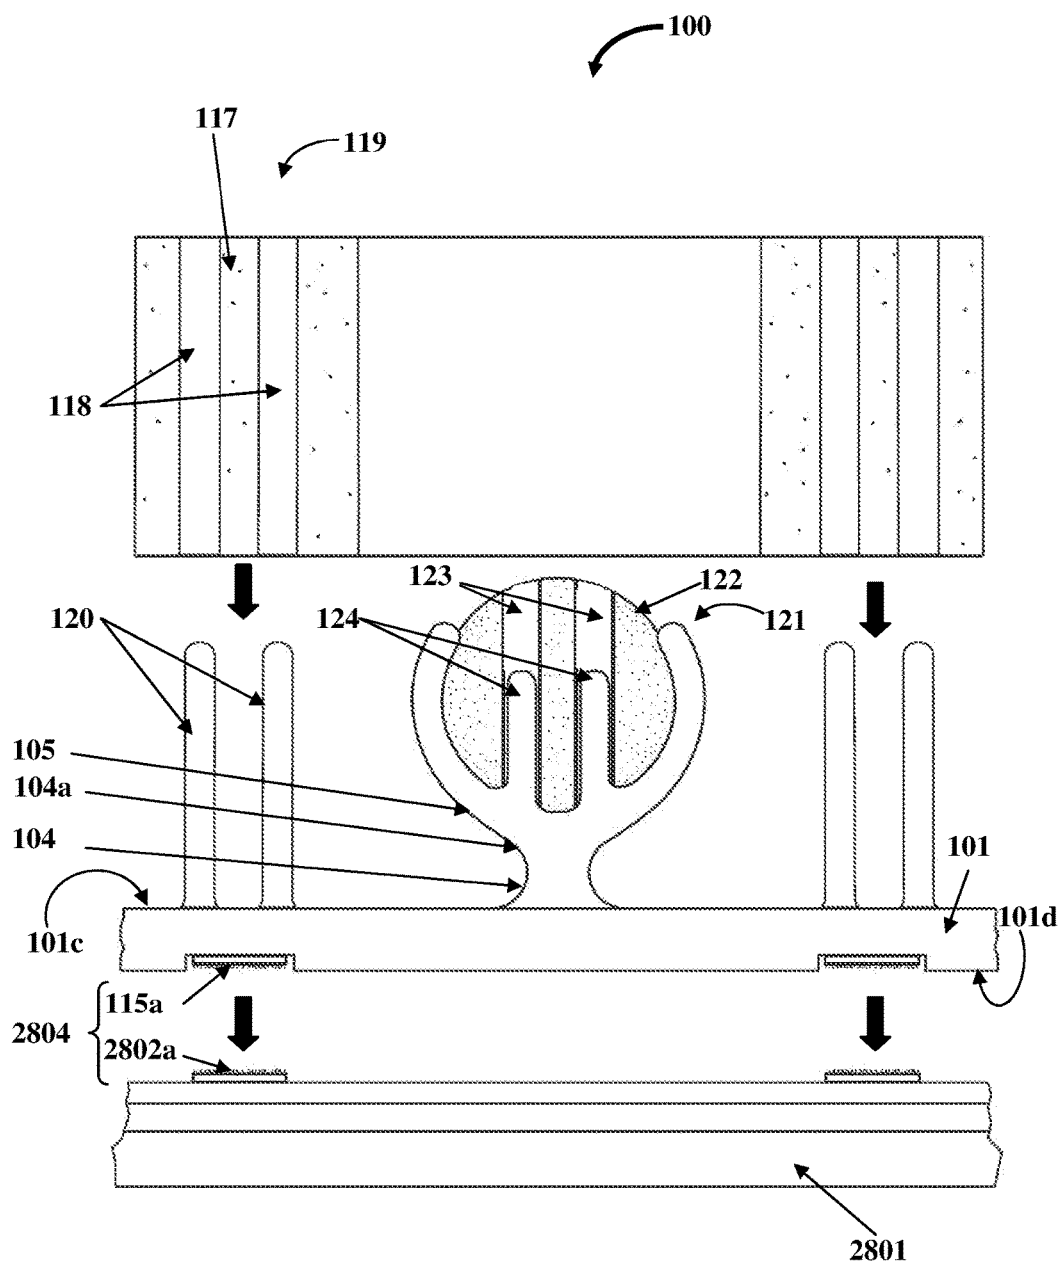


FIG. 36A

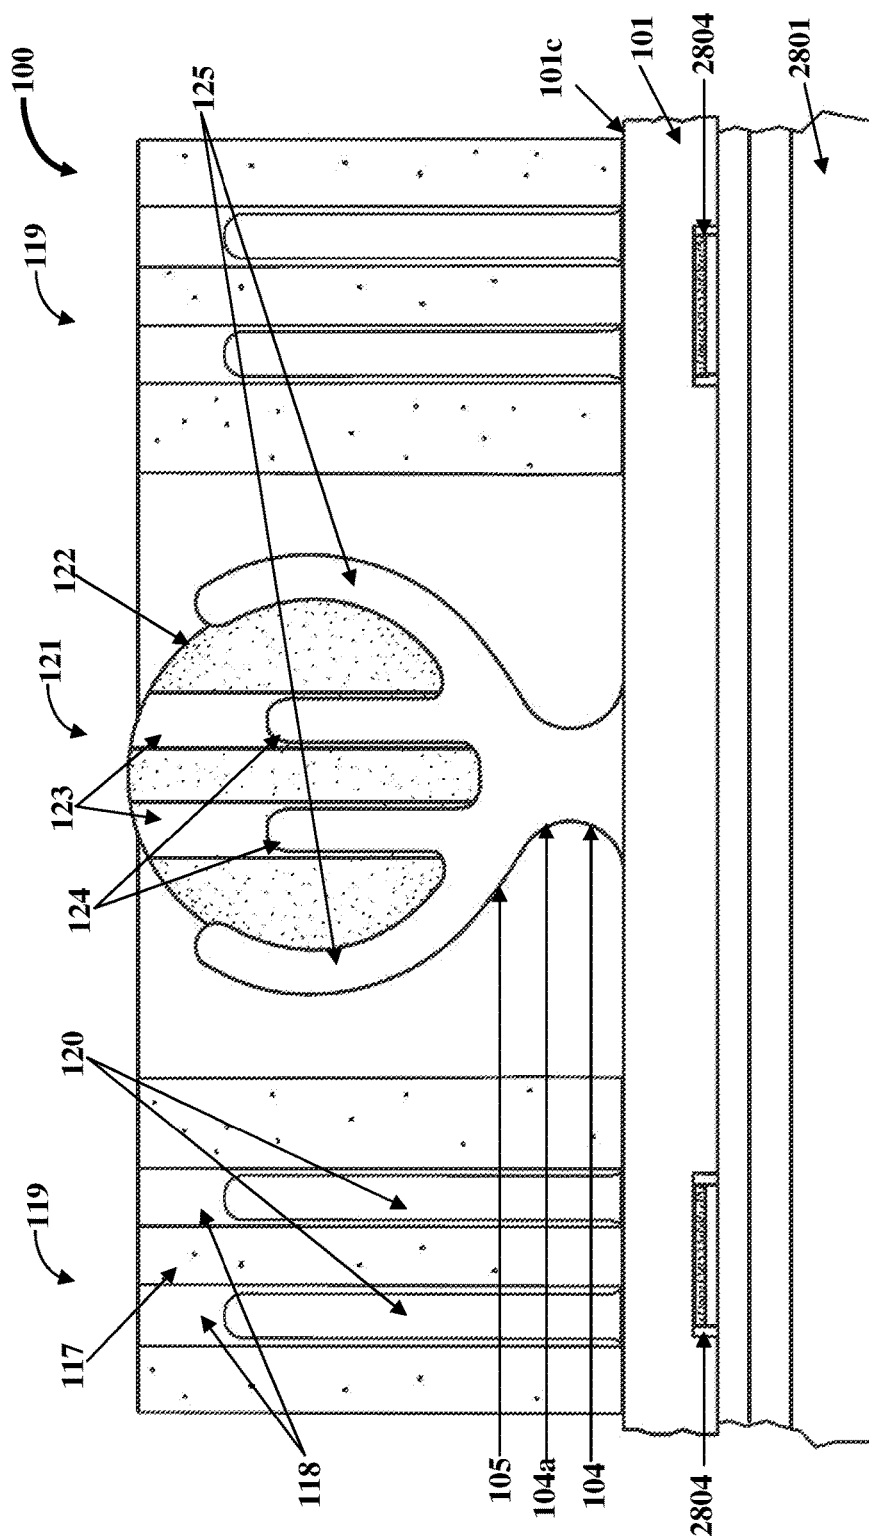


FIG. 36B

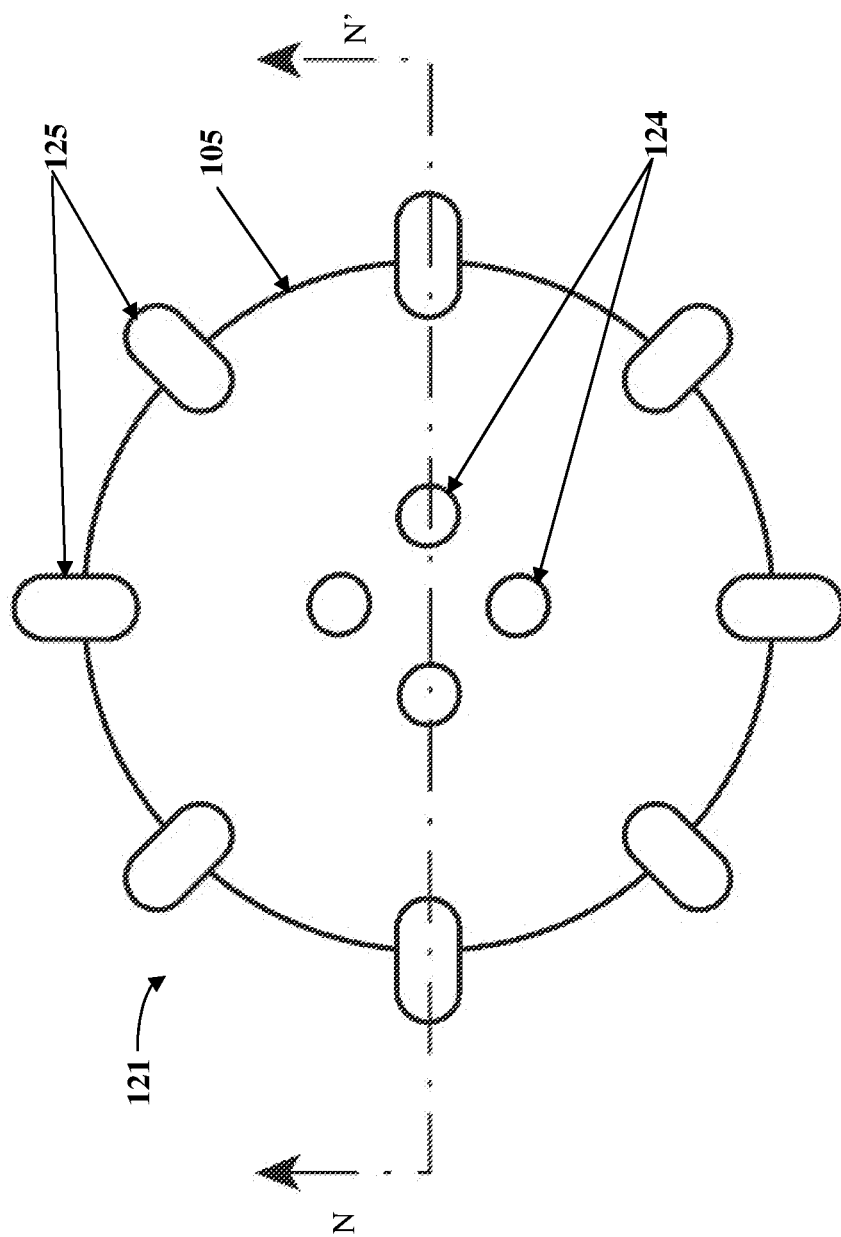


FIG. 37

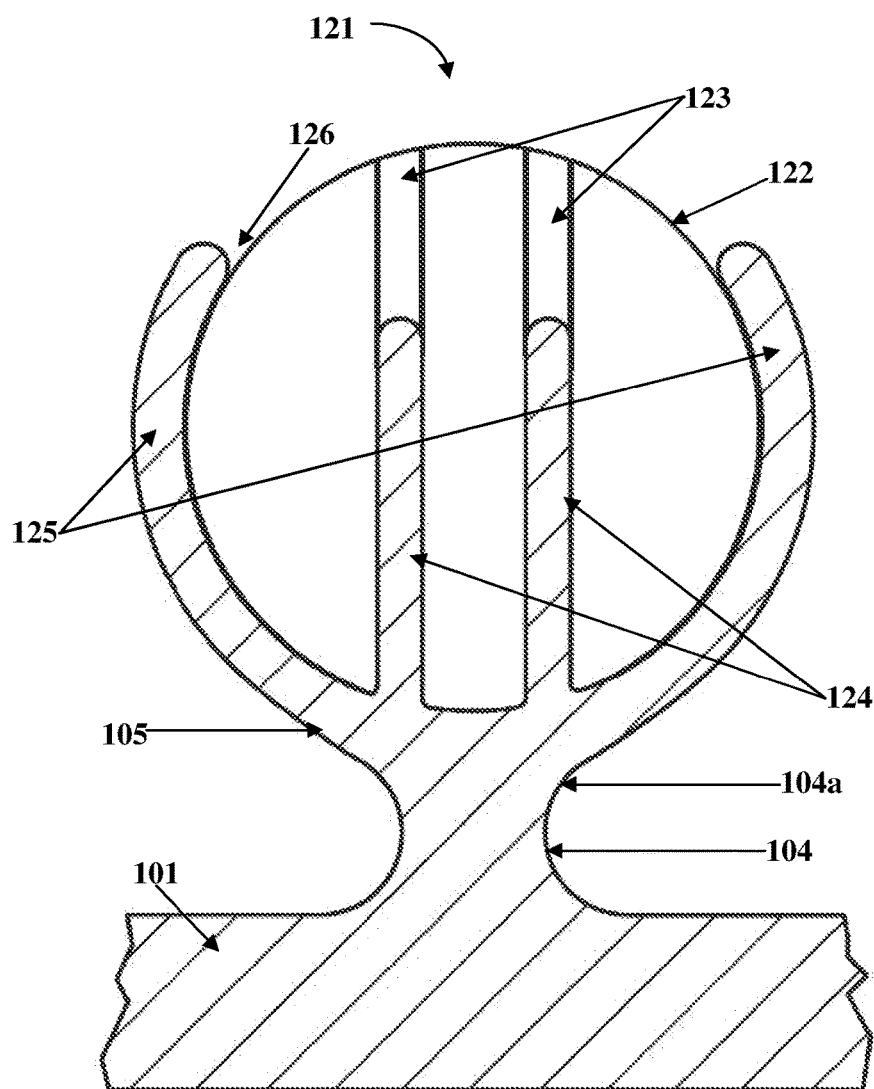


FIG. 38

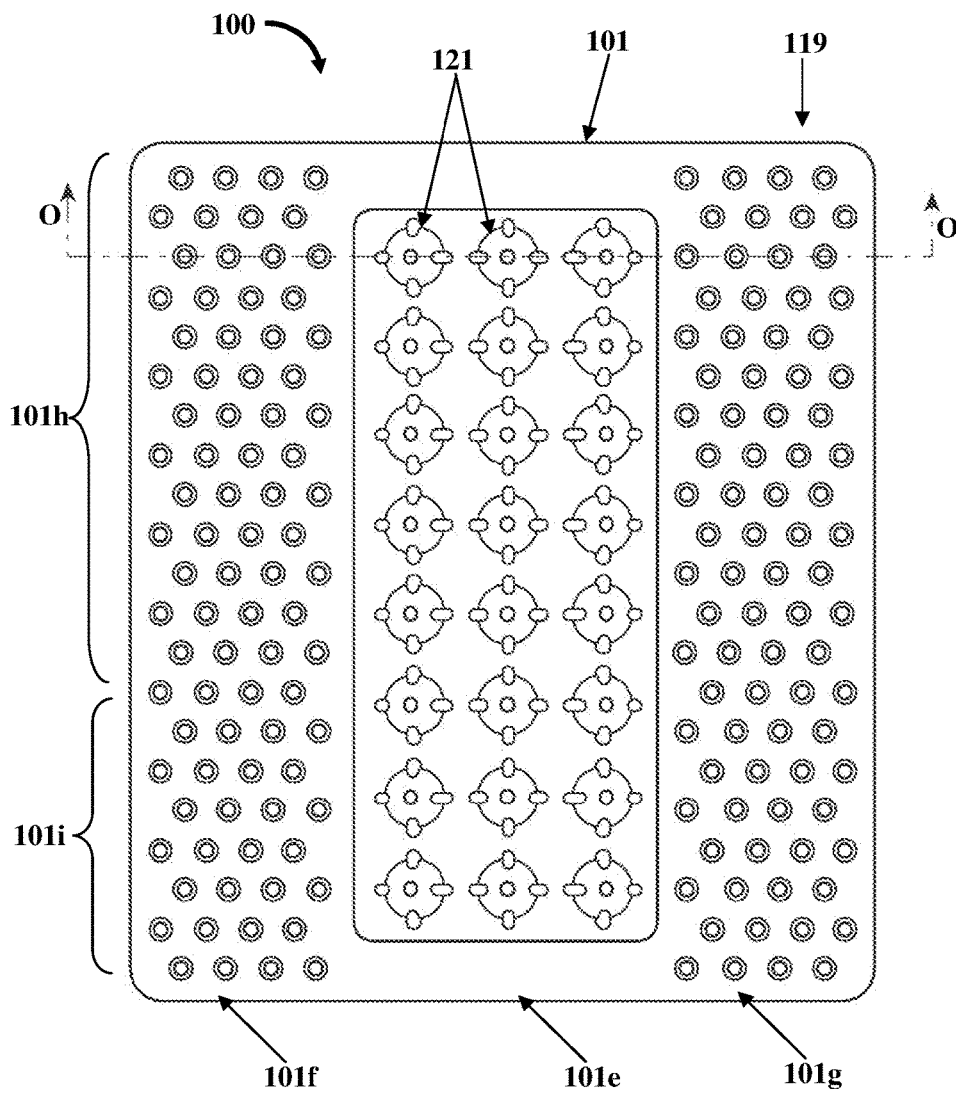


FIG. 39A

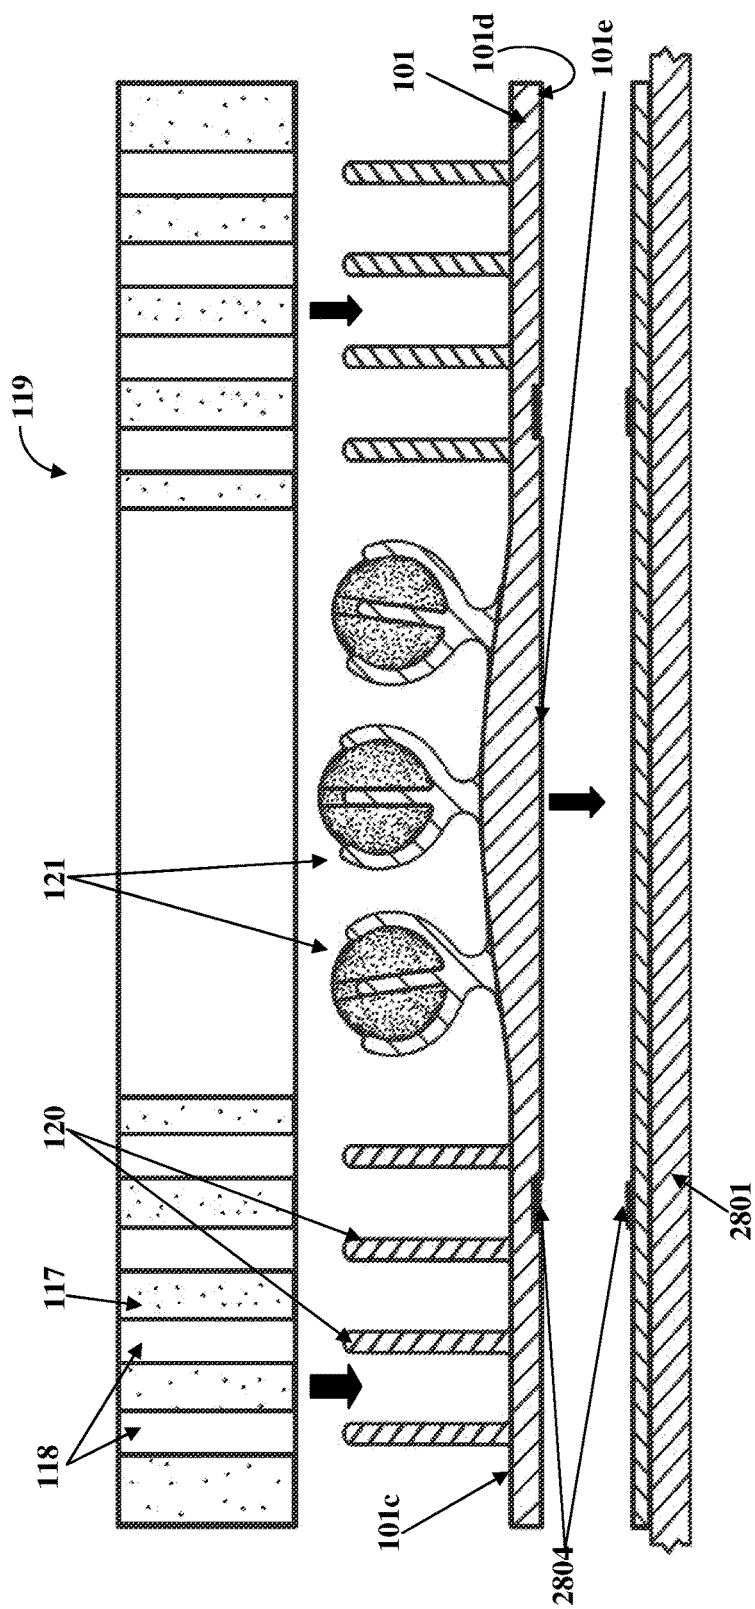


FIG. 39B

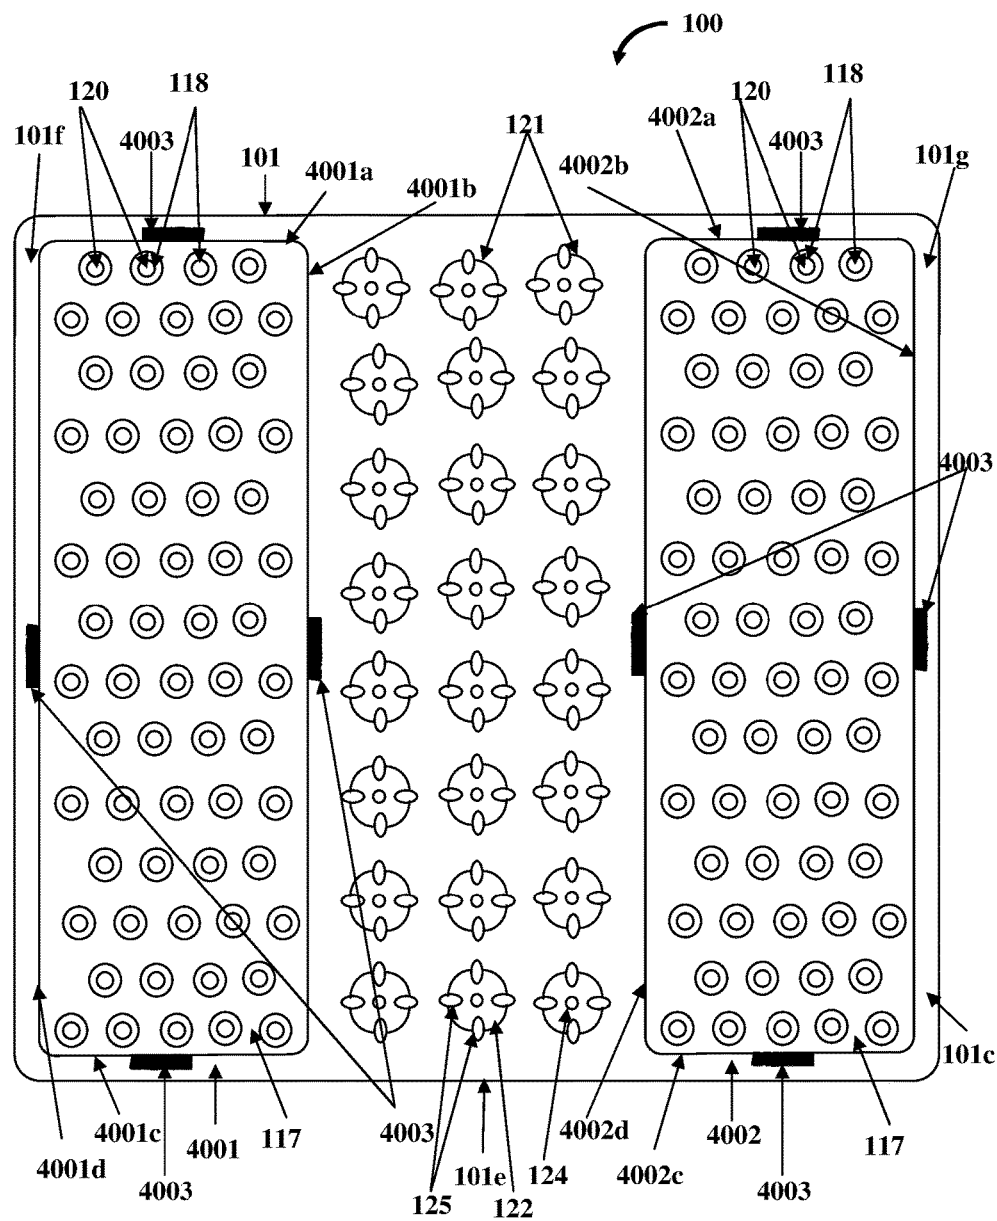


FIG. 40

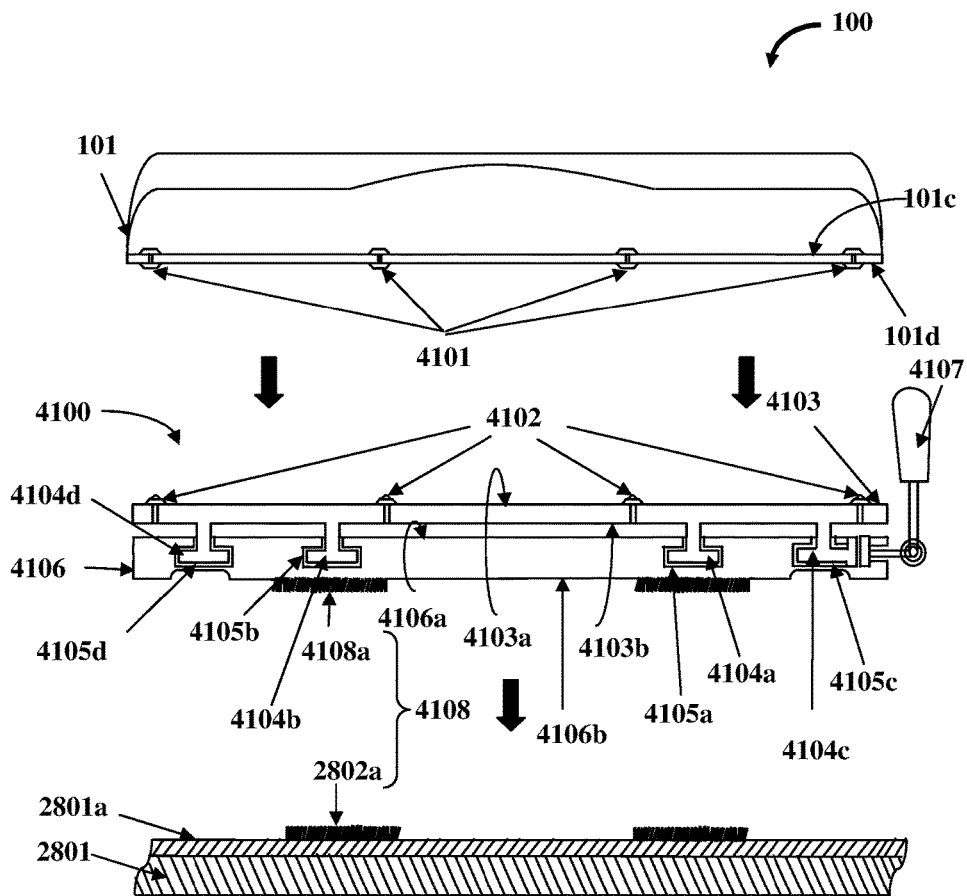


FIG. 41

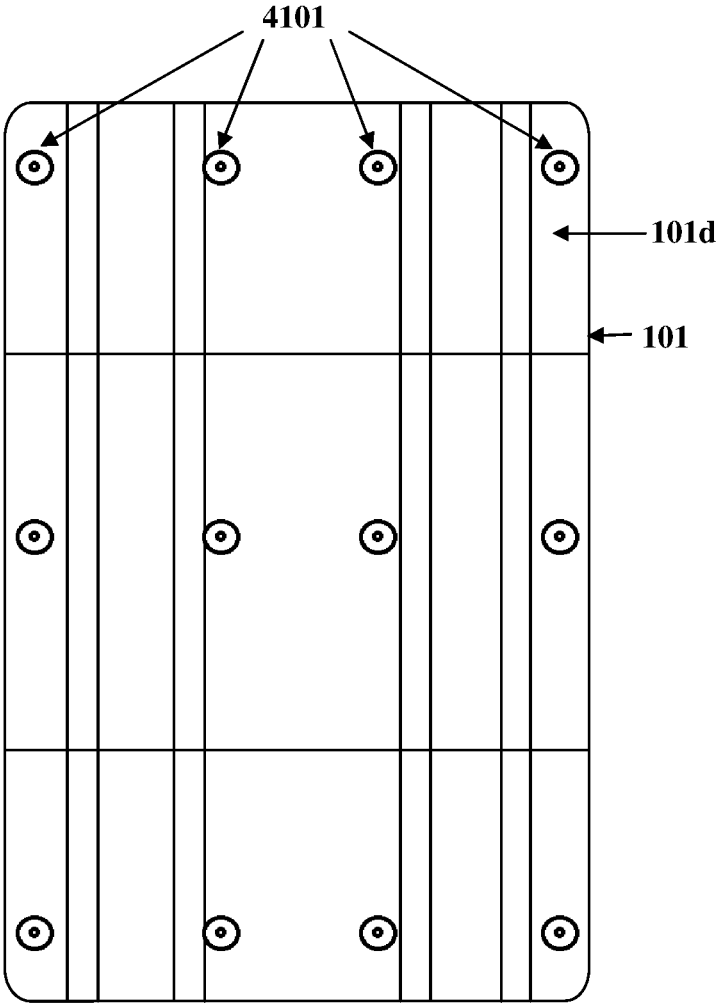


FIG. 42

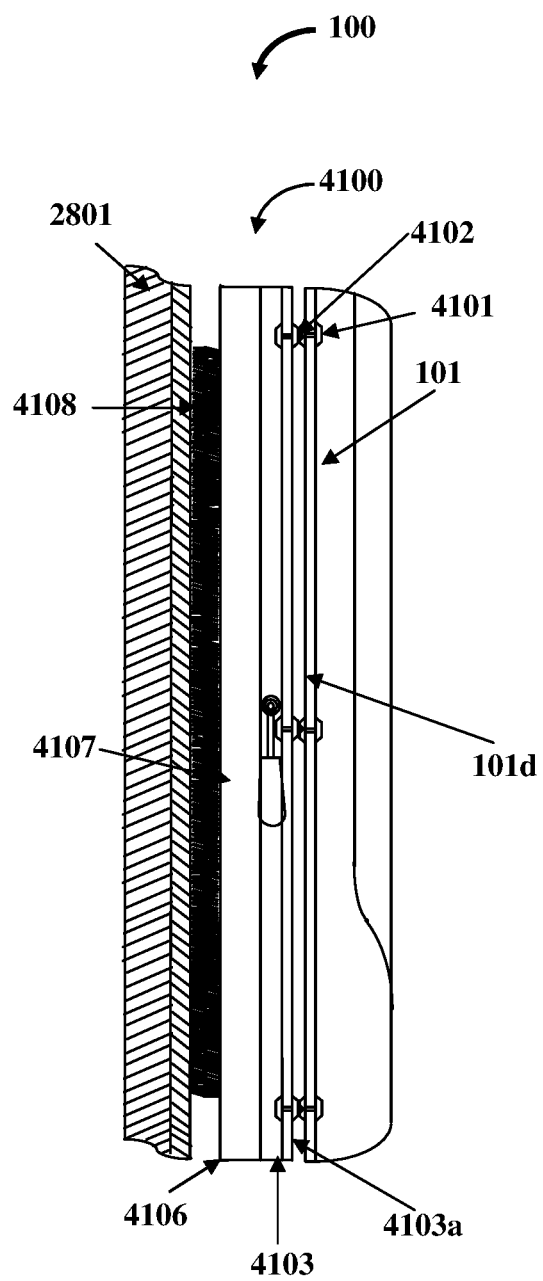


FIG. 43

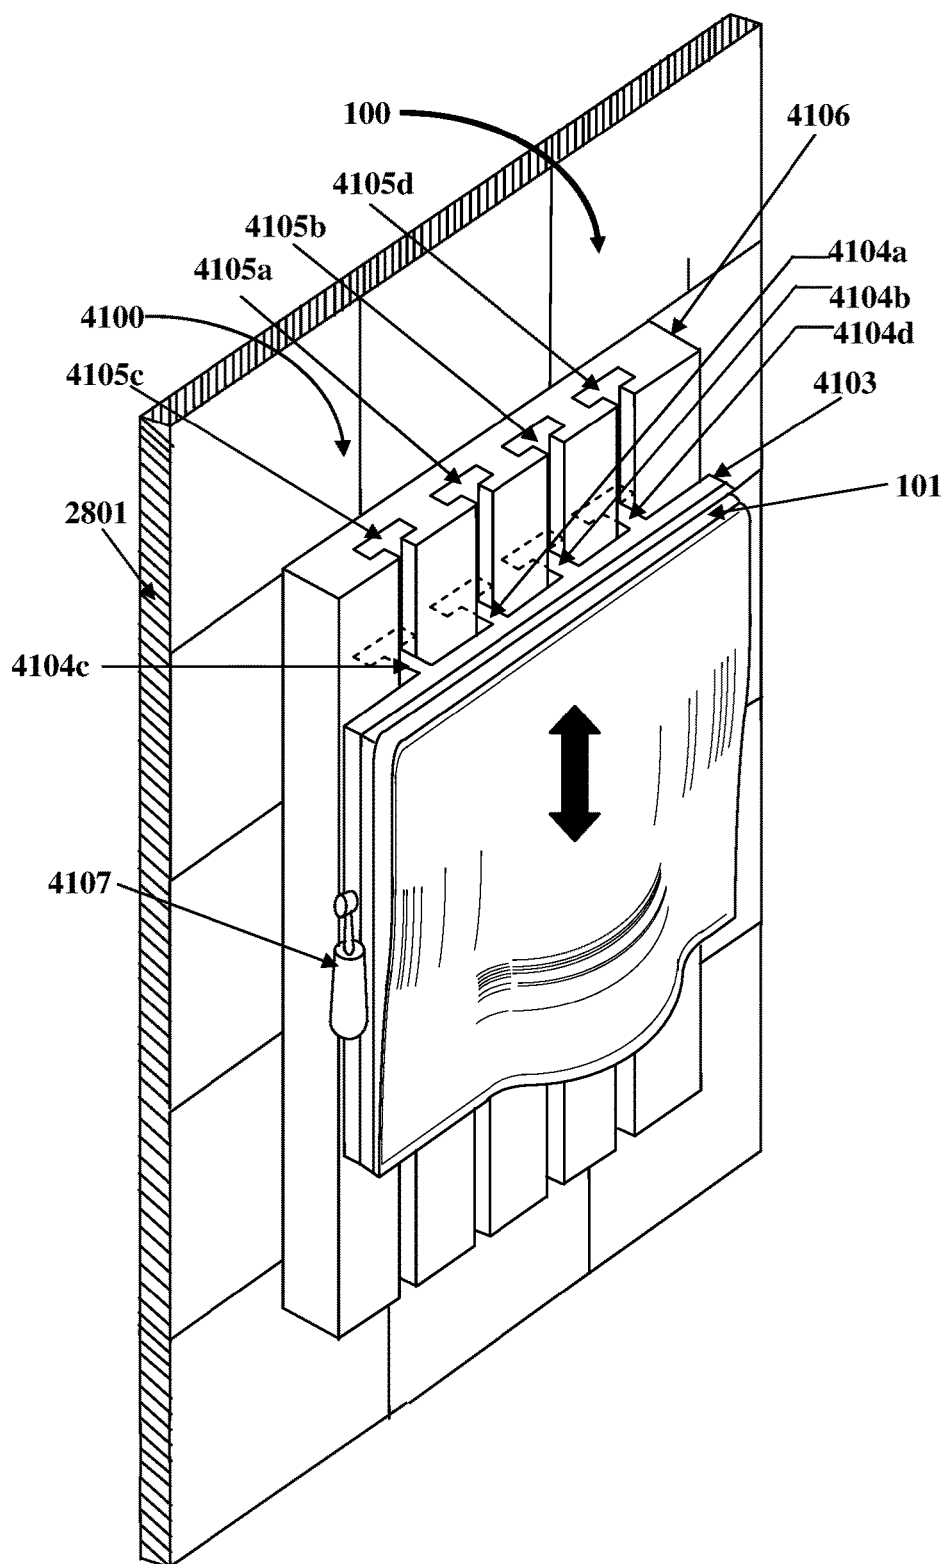


FIG. 44

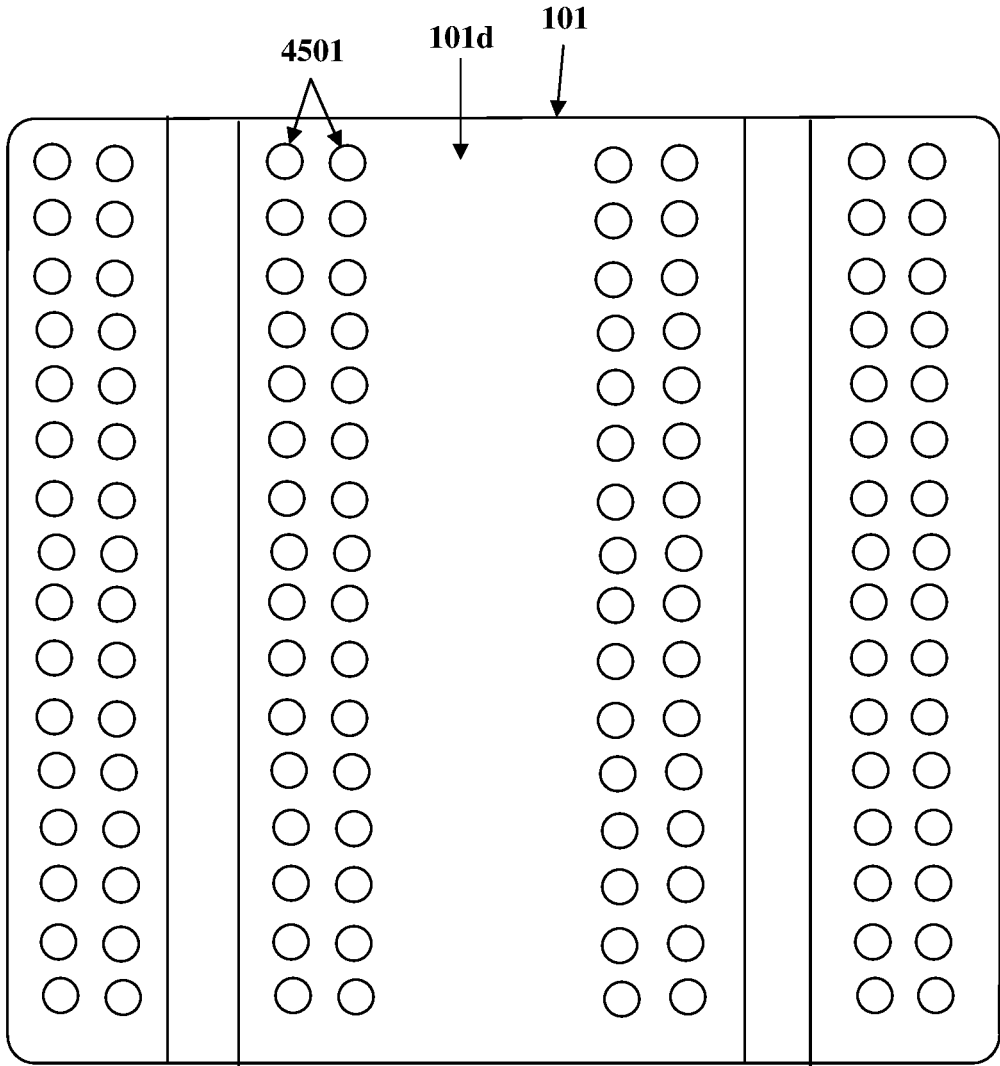


FIG. 45A

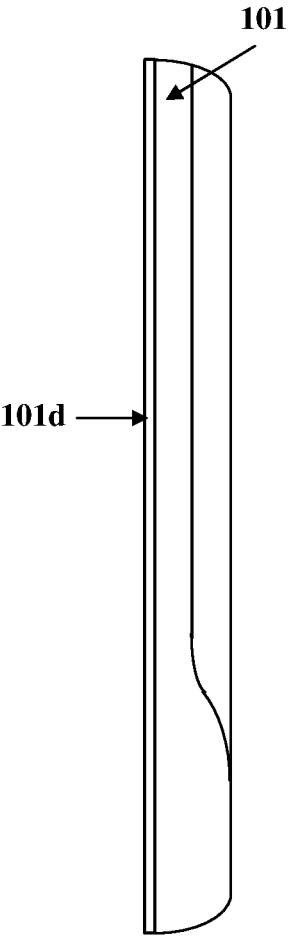


FIG. 45B

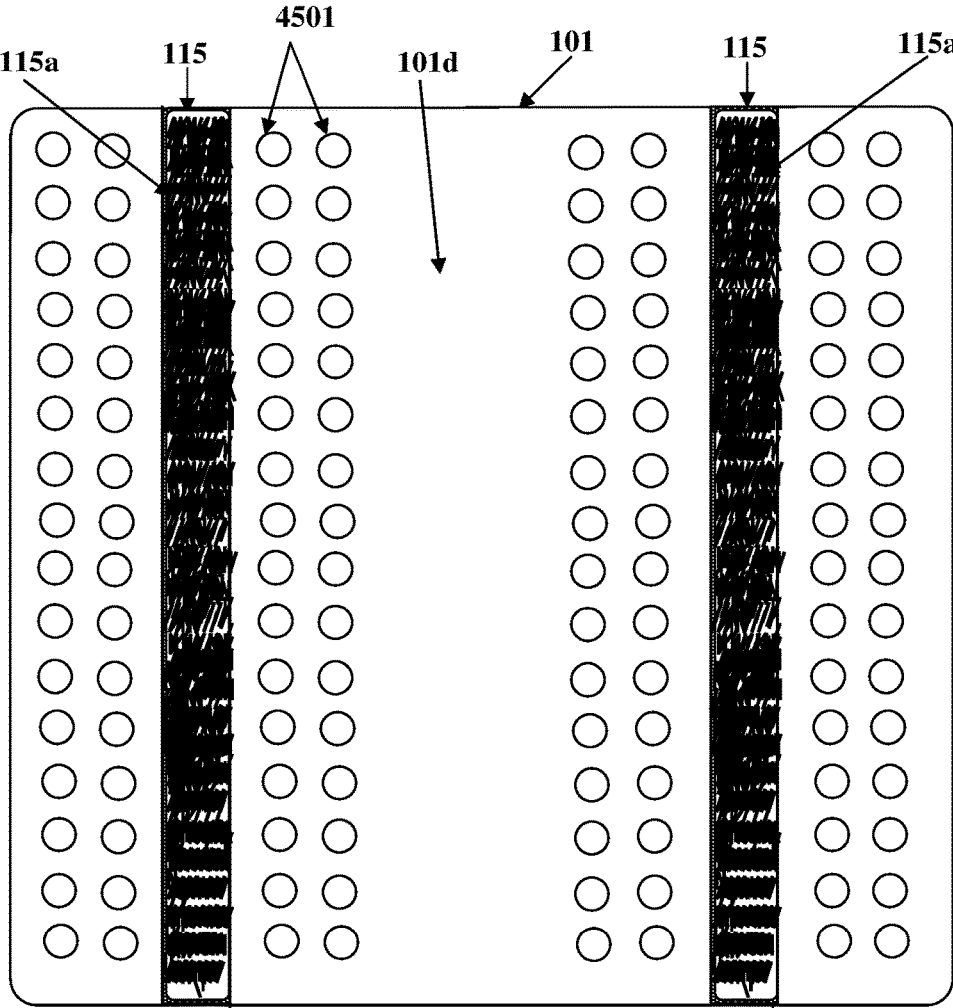


FIG. 46A

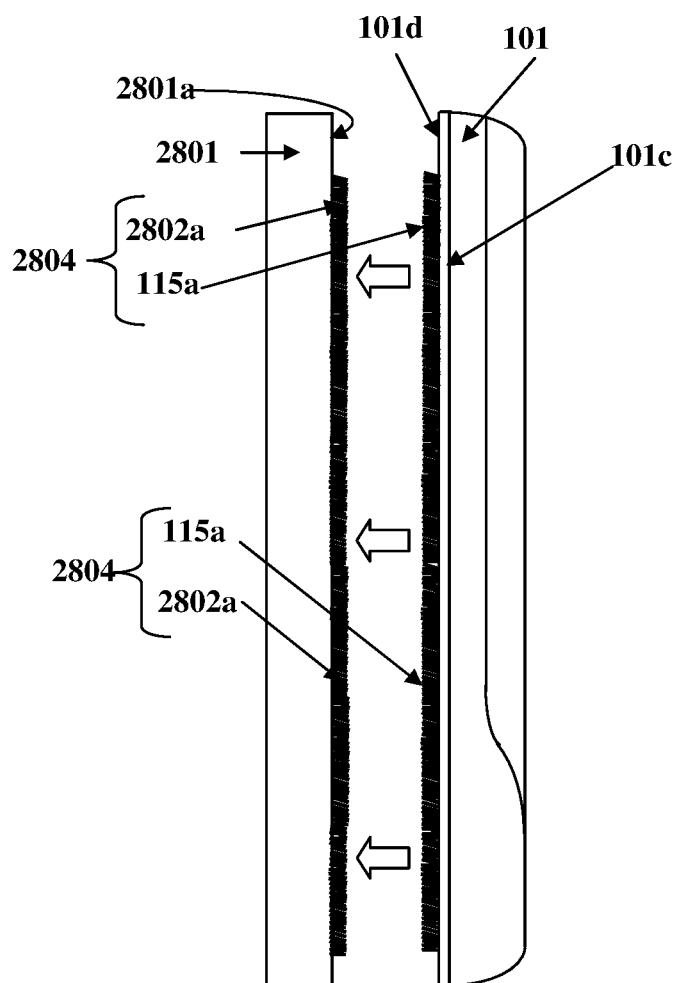


FIG. 46B

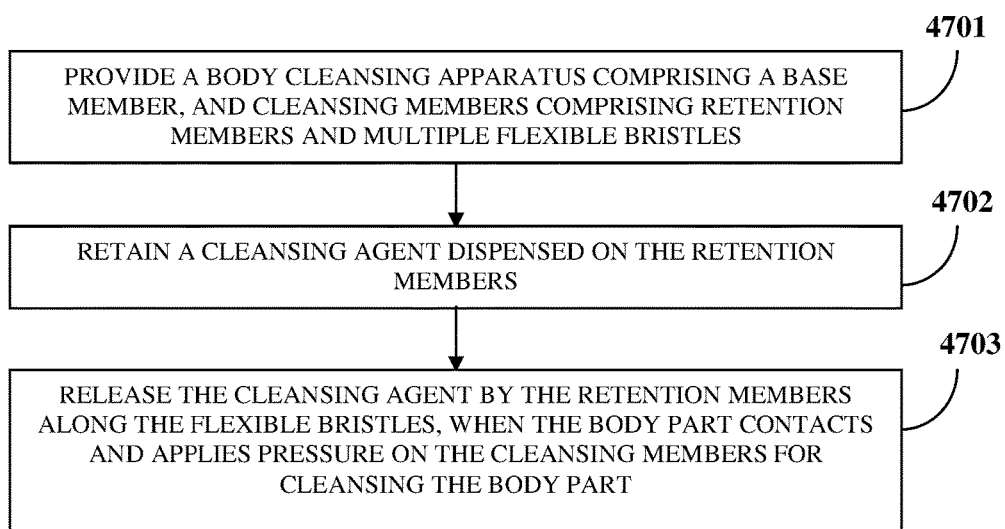
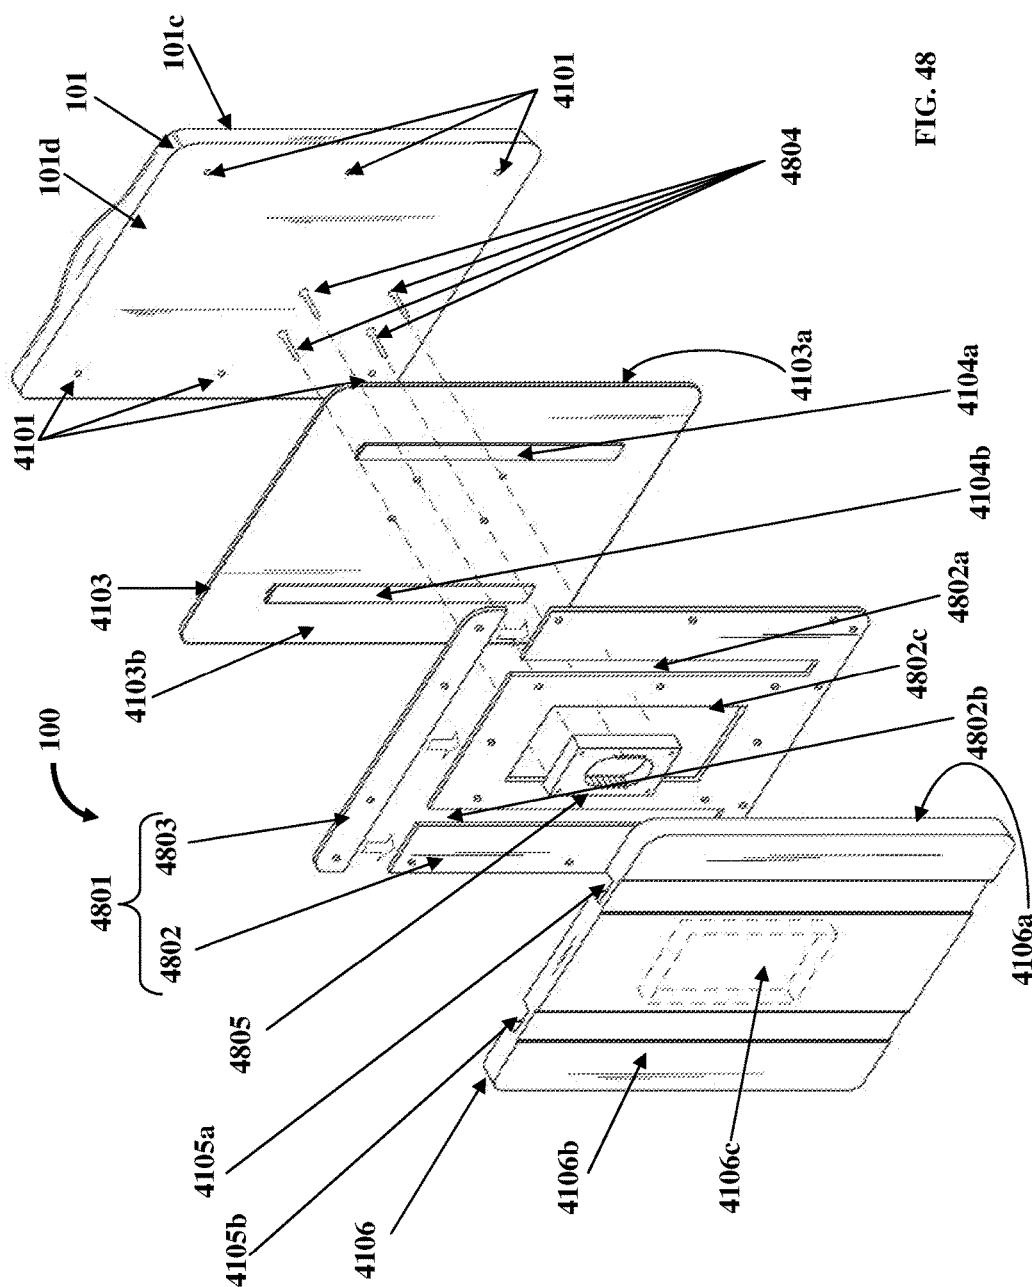


FIG. 47



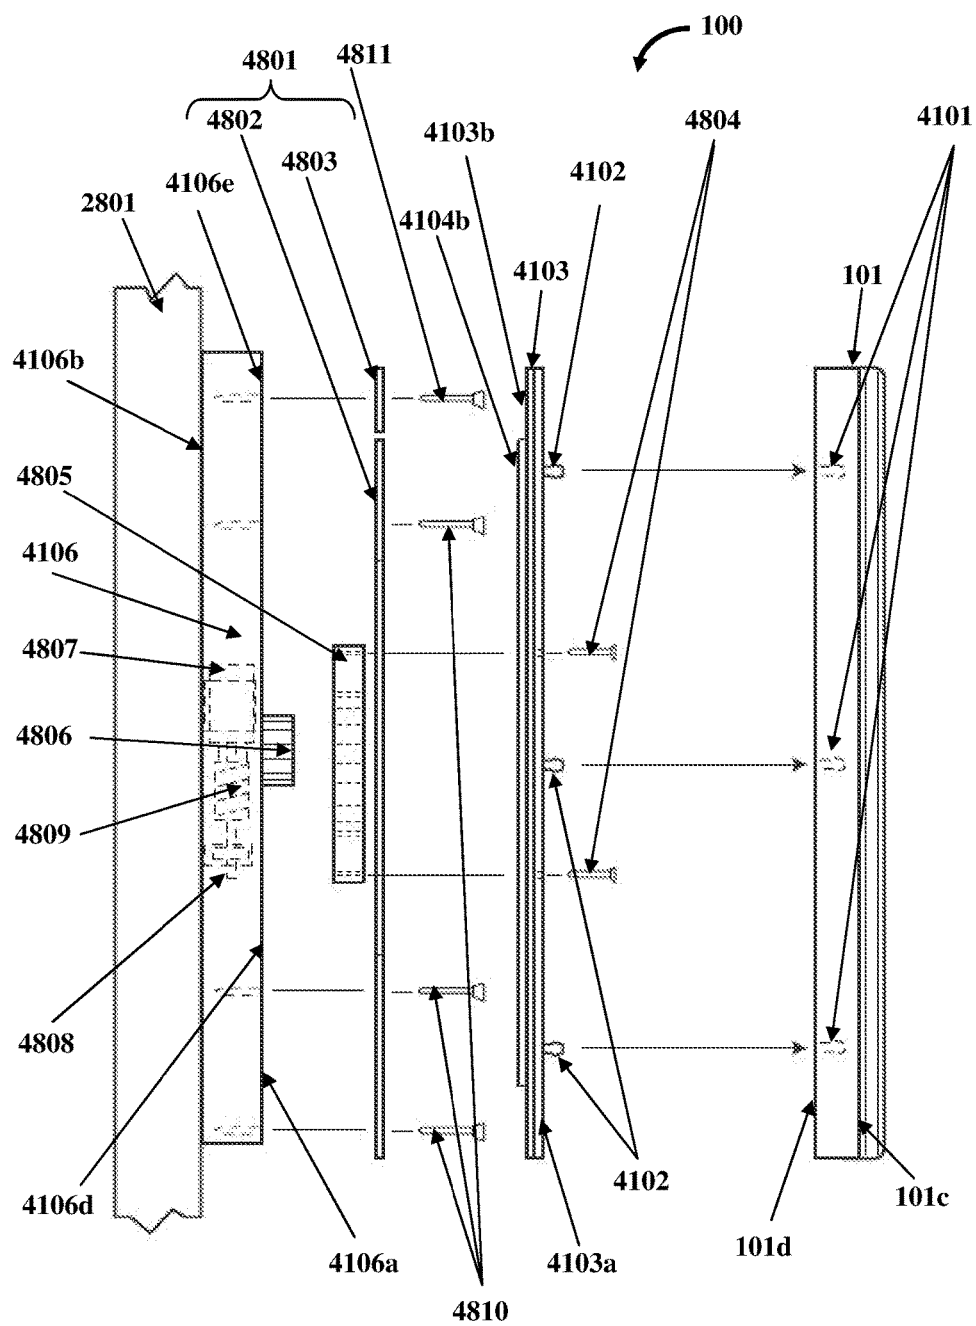


FIG. 49

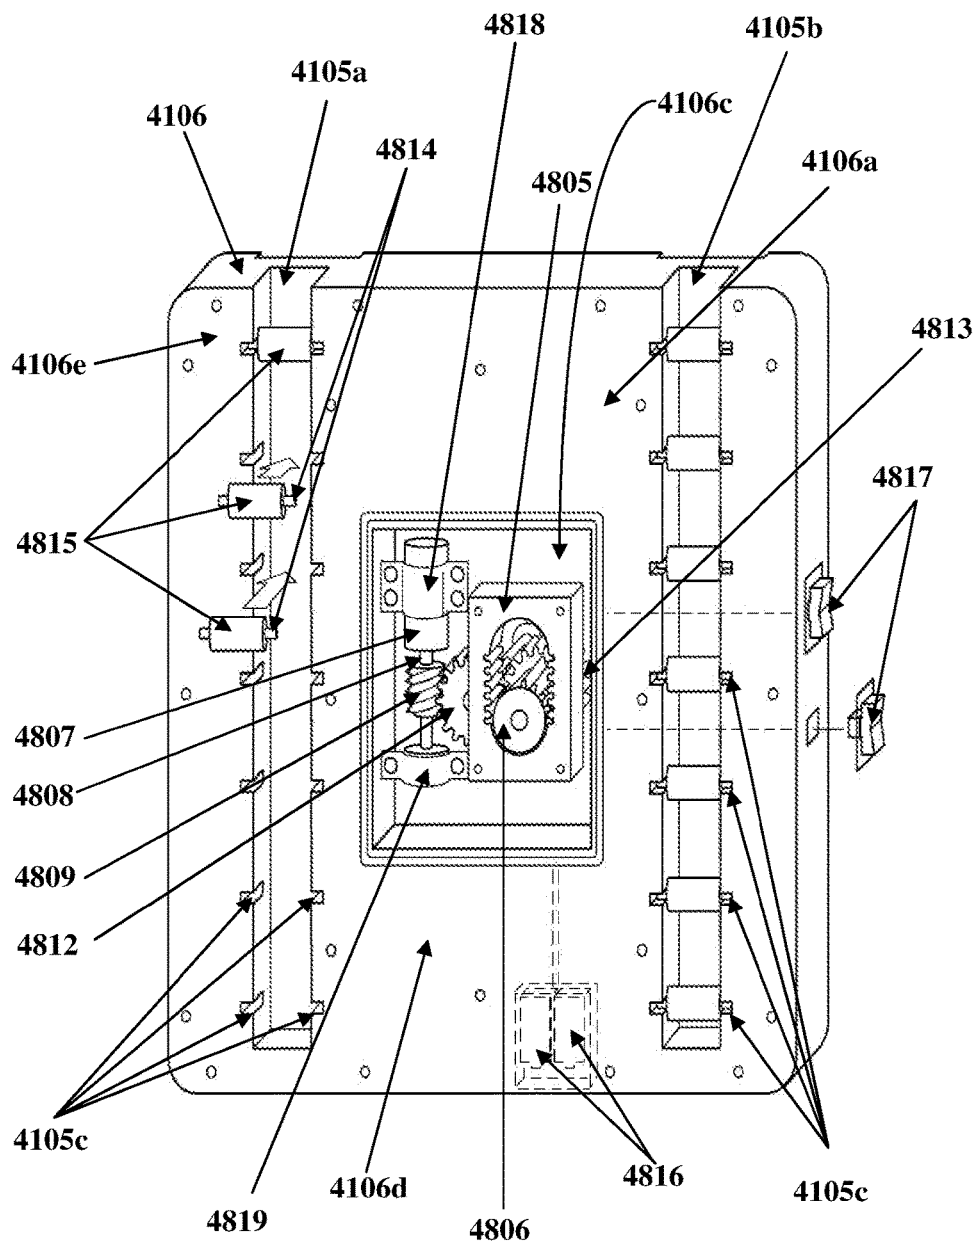


FIG. 50

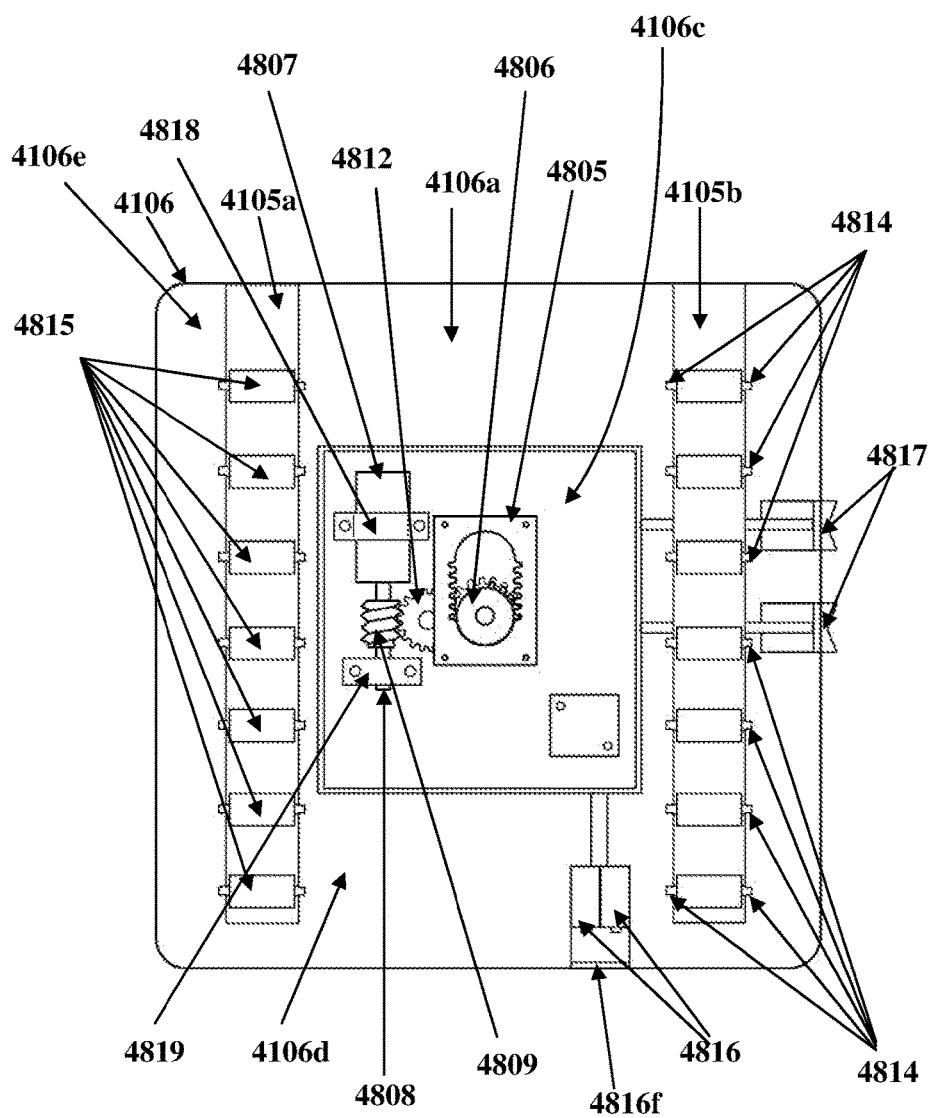


FIG. 51

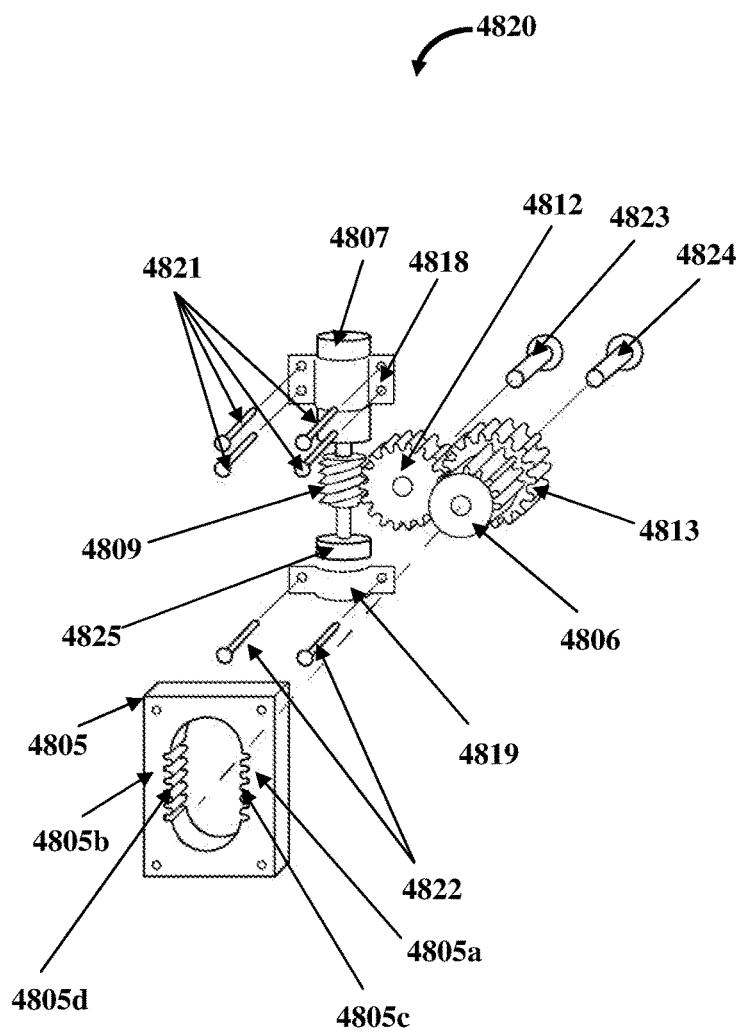


FIG. 52

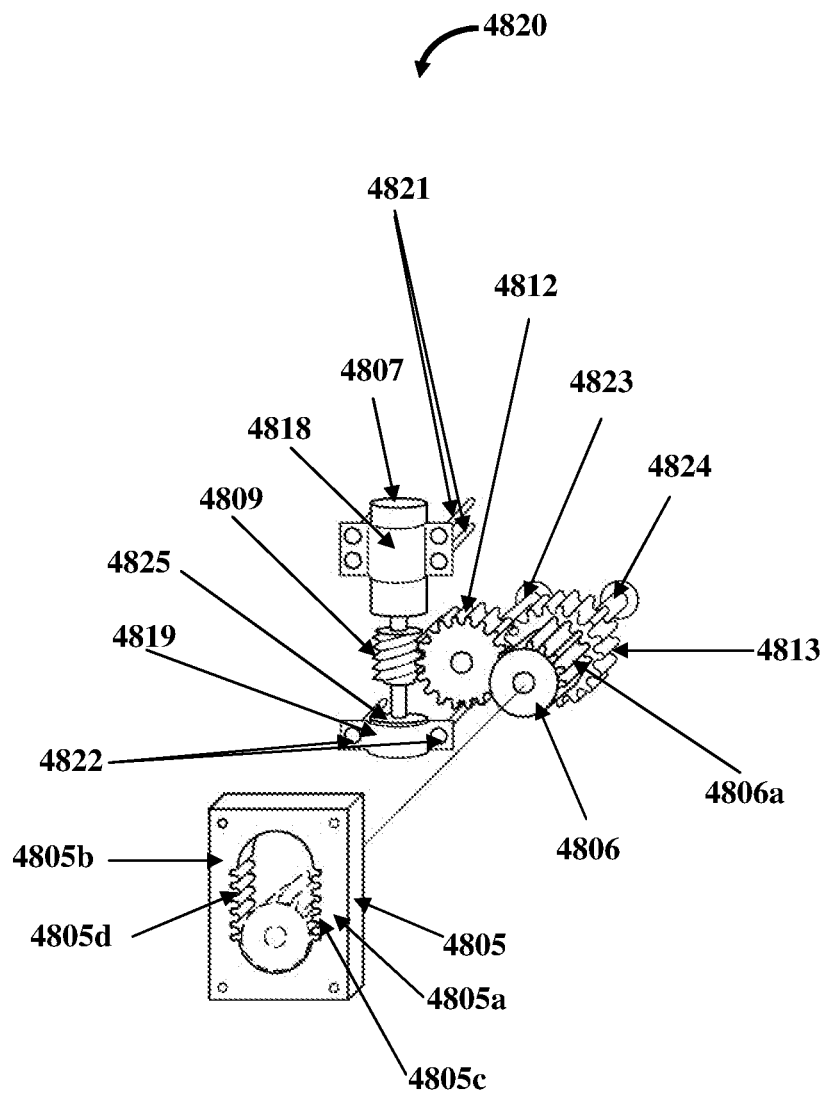


FIG. 53

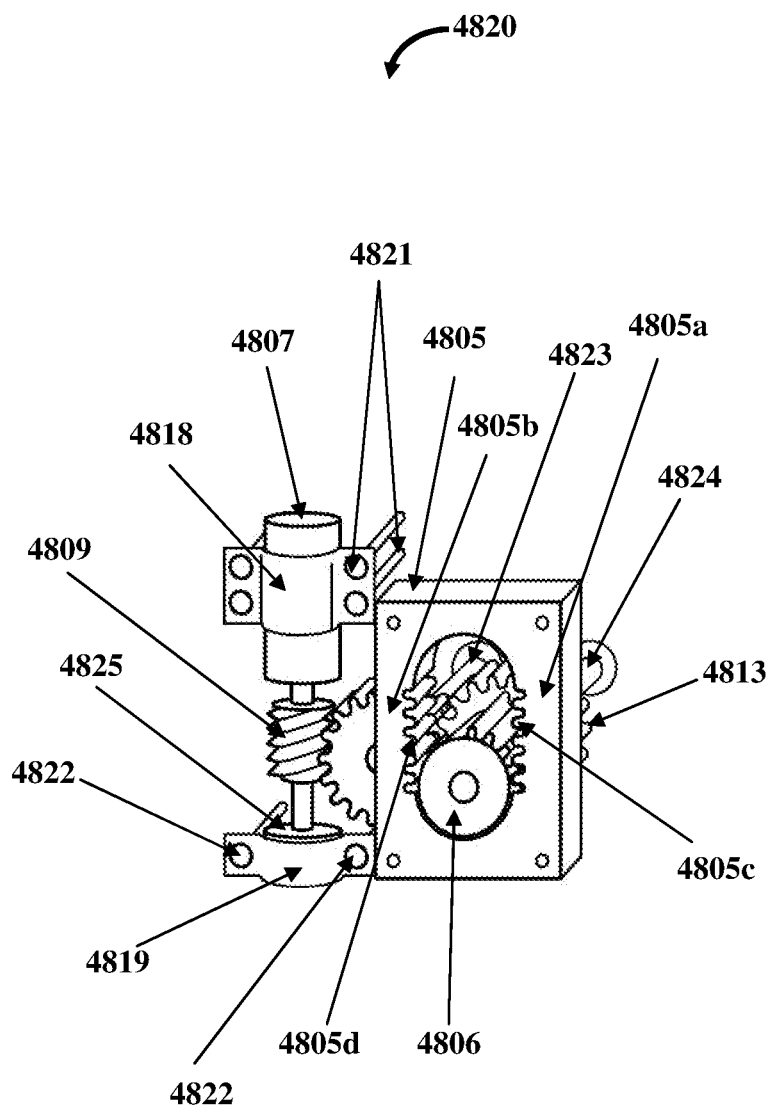


FIG. 54

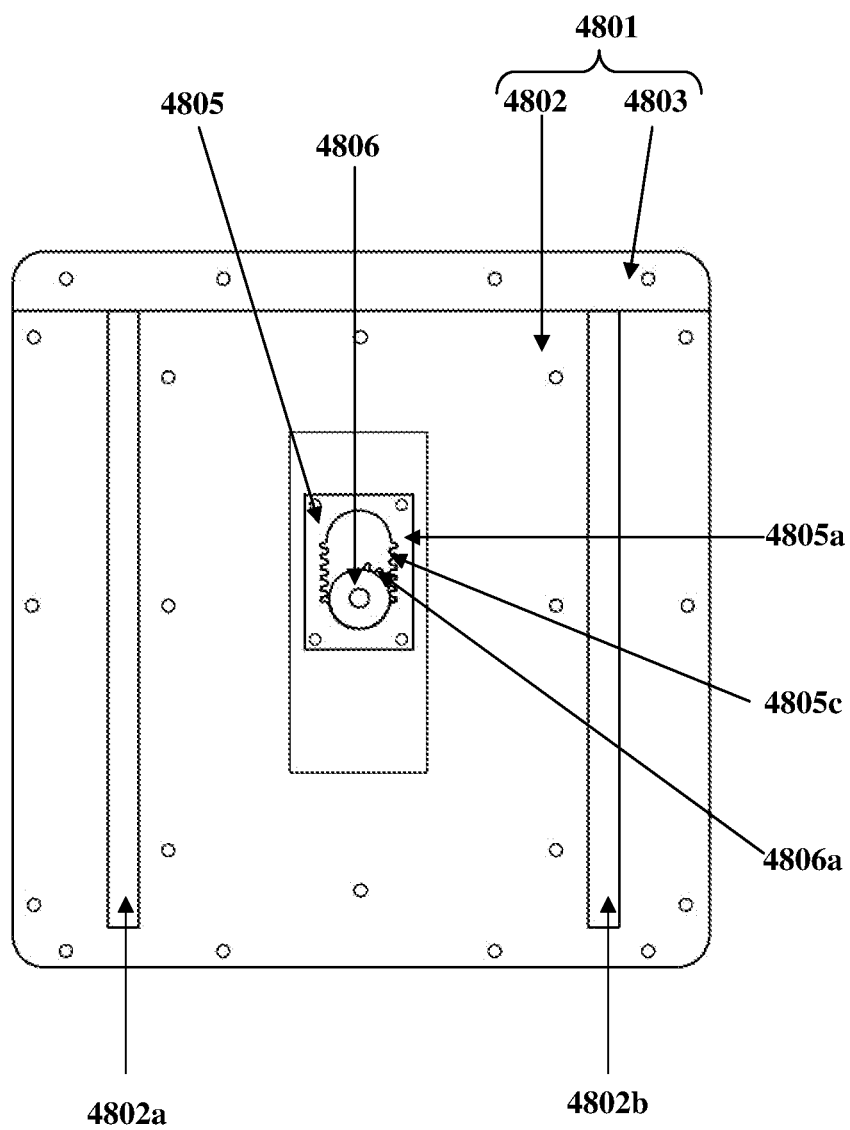


FIG. 55A

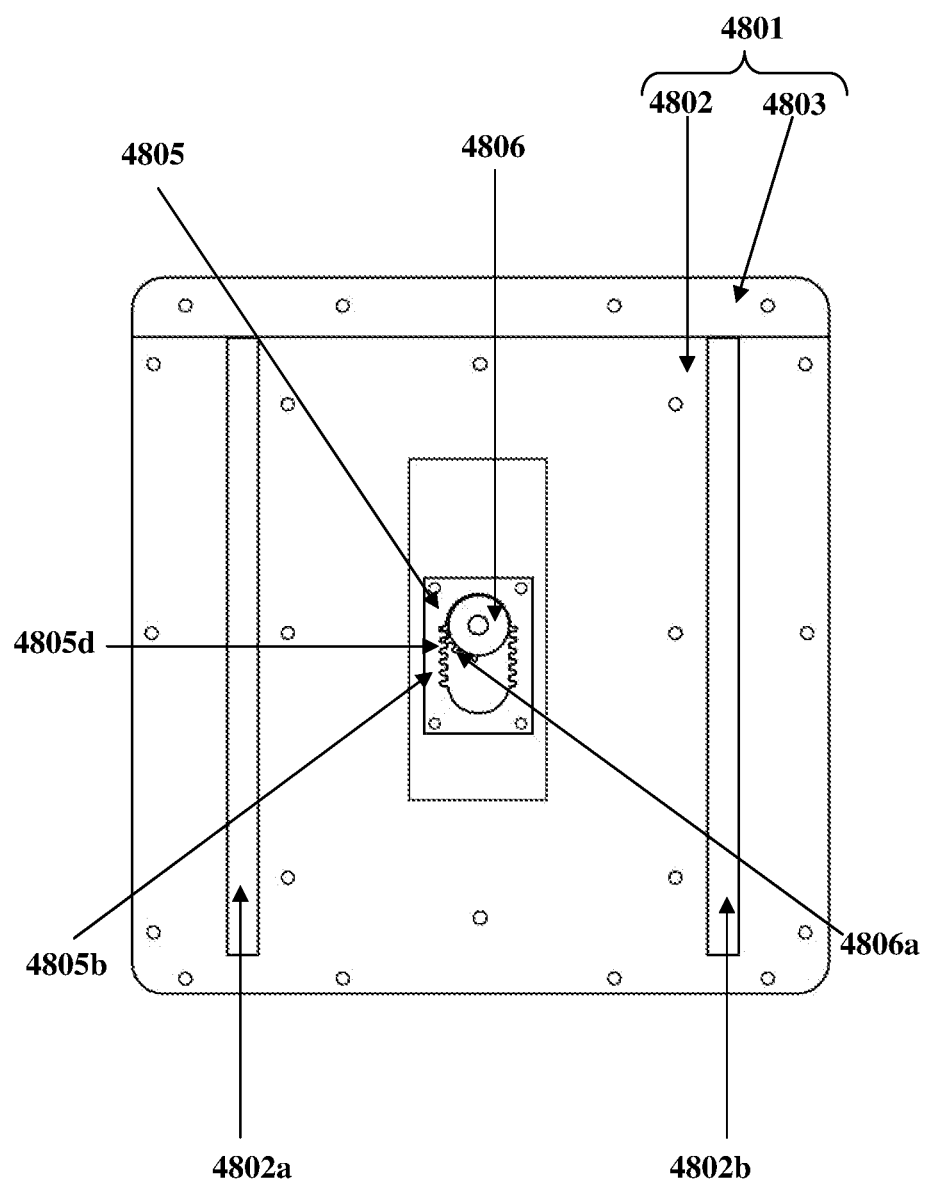


FIG. 55B

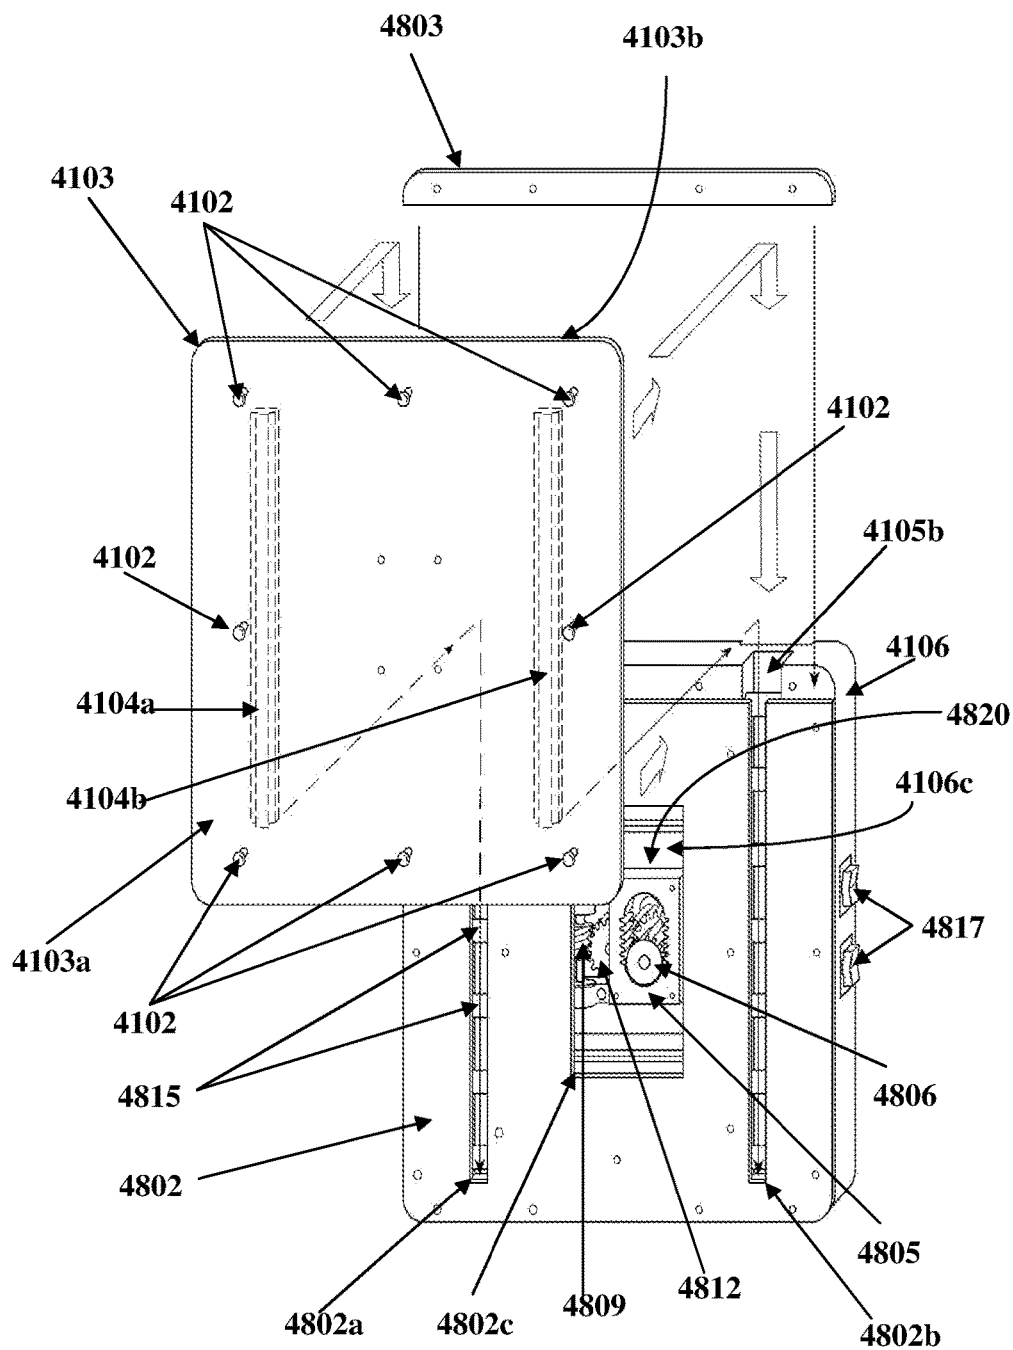


FIG. 56

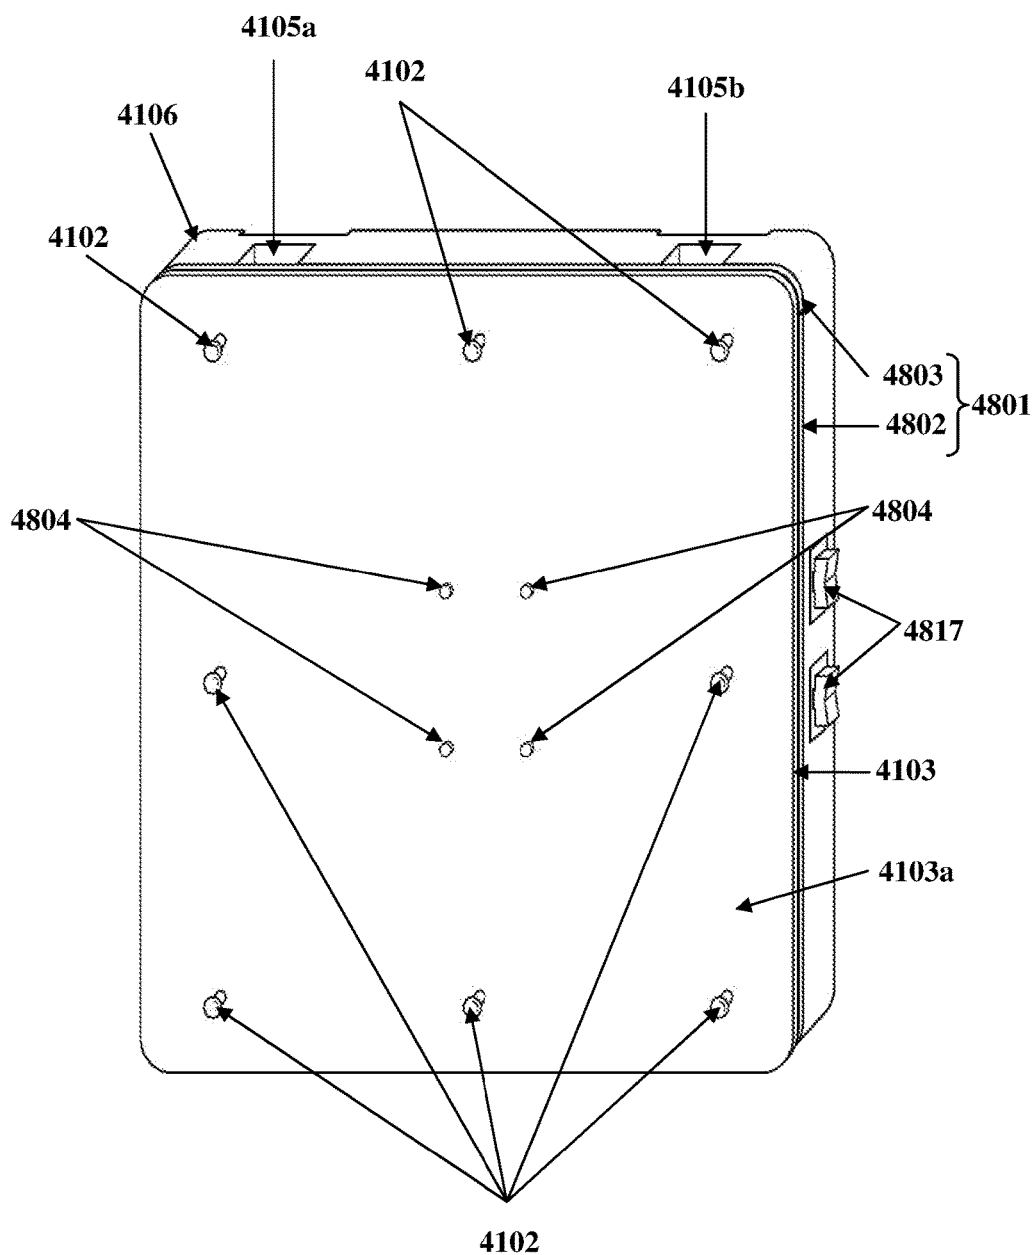


FIG. 57

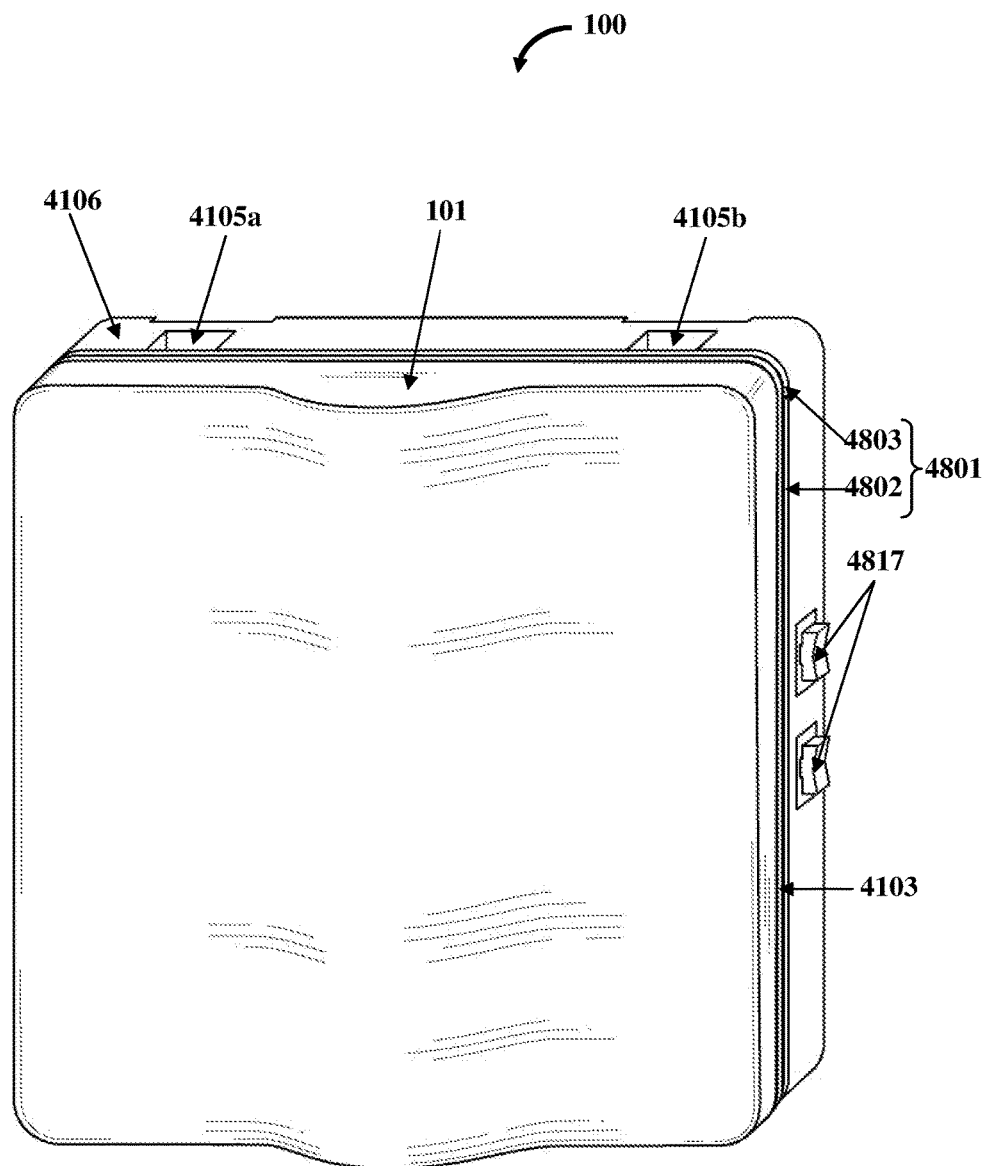


FIG. 58

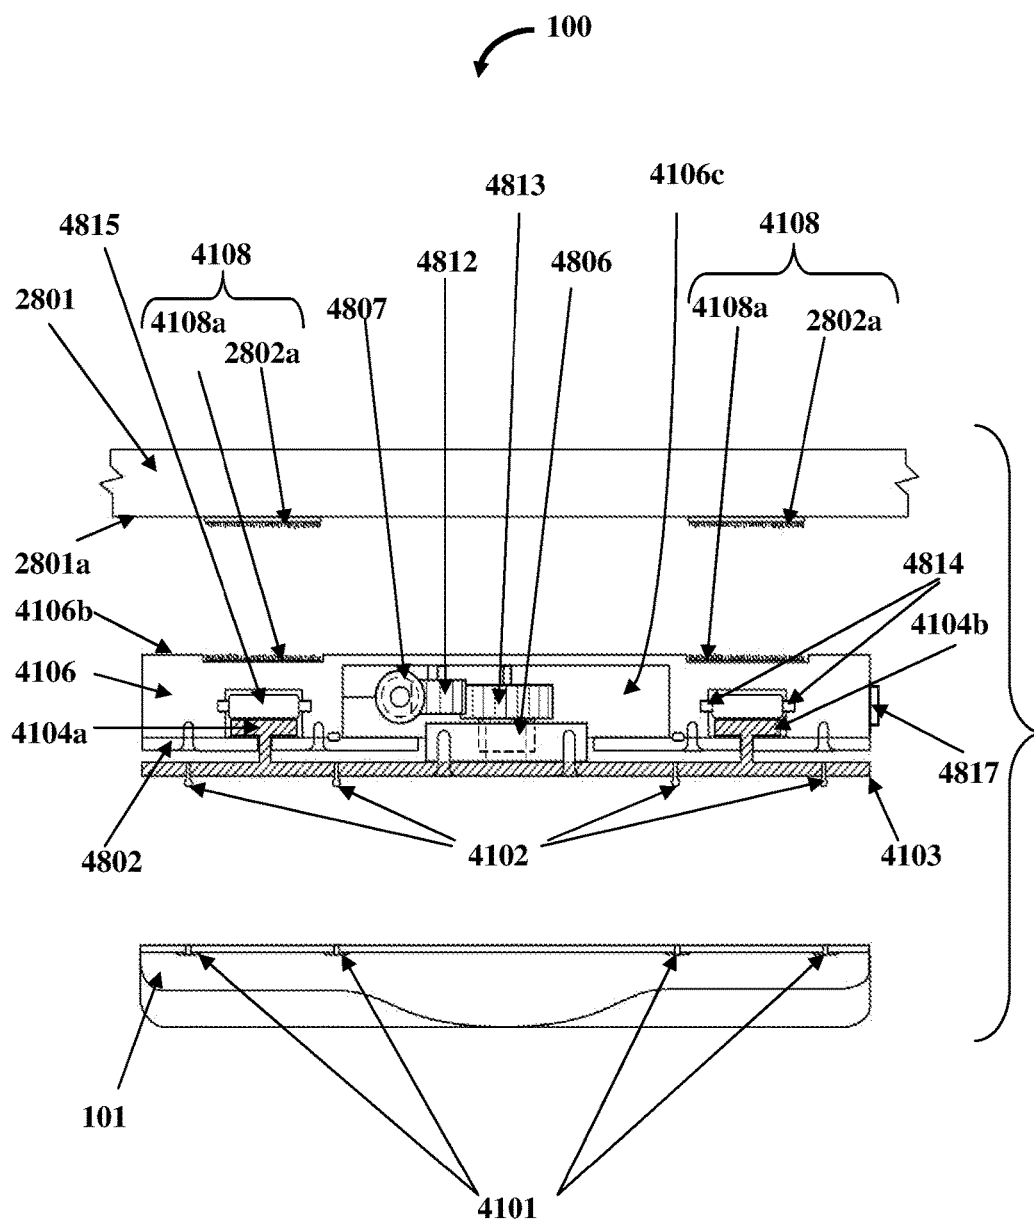


FIG. 59A

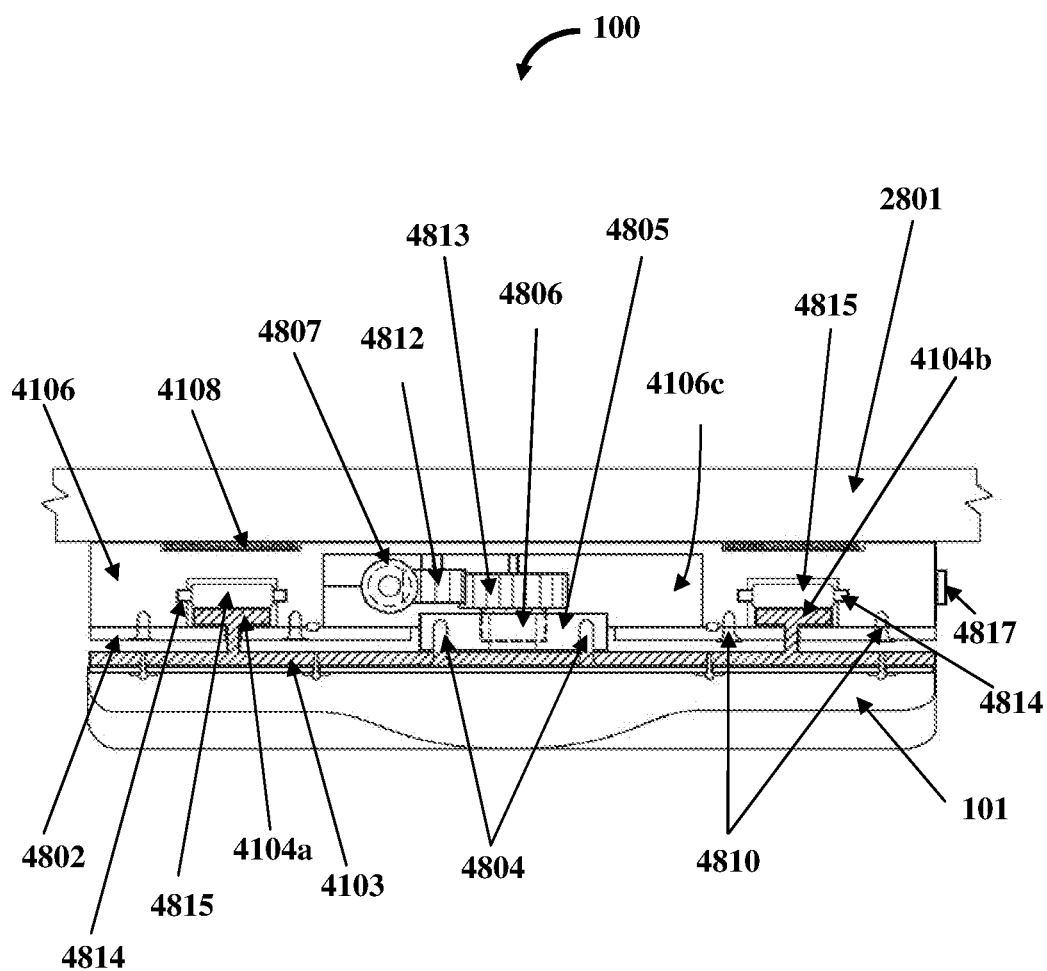


FIG. 59B

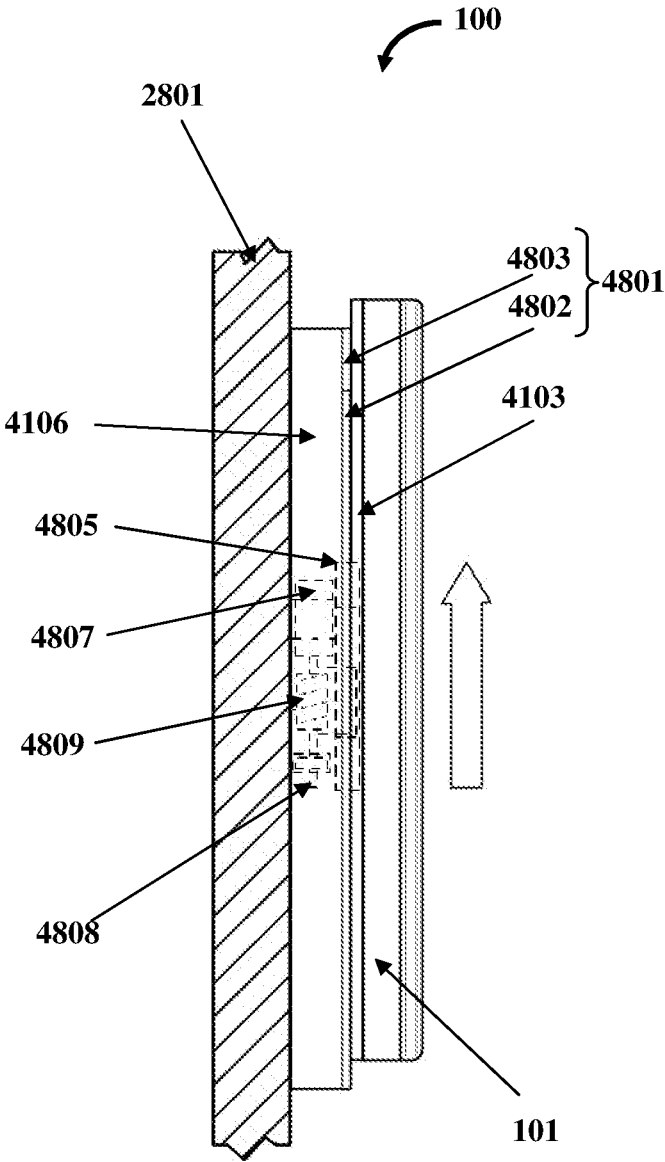


FIG. 60A

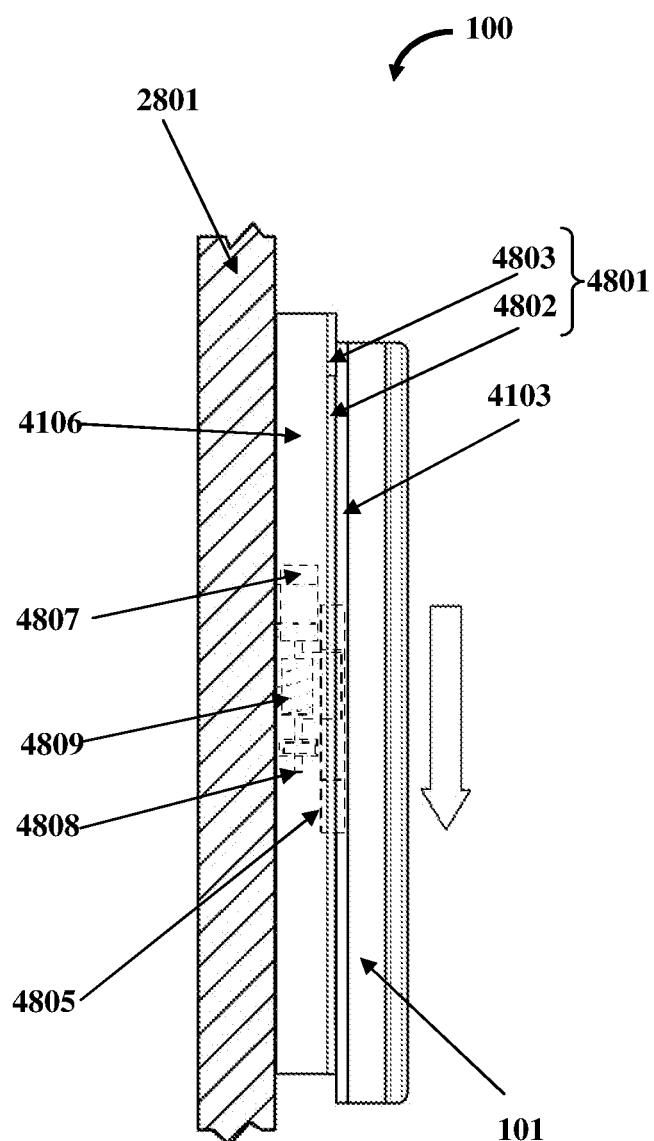


FIG. 60B

MOTORIZED BODY CLEANSING APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part application of non-provisional patent application Ser. No. 13/536, 937 titled “Body Cleansing Apparatus”, filed in the United States Patent and Trademark Office on Jun. 28, 2012, which claims priority to and the benefit of provisional patent application No. 61/501,897 titled “Cleansing Kit”, filed in the United States Patent and Trademark Office on Jun. 28, 2011. The specifications of the above referenced patent applications are incorporated herein by reference in their entirety.

BACKGROUND

[0002] The apparatus disclosed herein, in general, relates to a cleansing apparatus. More particularly, the apparatus disclosed herein relates to a body cleansing apparatus comprising multiple different types of cleansing members positioned on the body cleansing apparatus for cleansing a user's body.

[0003] Commercially available cleansing apparatuses typically include handheld brushes that can be used to cleanse a user's back. However, a user may not be able to easily access all areas of the user's back for cleansing using these handheld brushes. Conventional handheld back brushes that have fixed and detachable handles typically require a fair amount of physical flexibility and coordination on the part of the user for their effective use. Users with stiff necks, stiff backs, arthritis, etc., typically find it difficult to use these handheld back brushes for cleansing body parts that are difficult to access, for example, their backs.

[0004] Moreover, bristles provided on conventional brushing devices have a linear design. These linear bristle structures do not sufficiently collect, contain, retain, and dispense a cleansing agent used for cleansing, resulting in wastage of the cleansing agent. Linear bristles also accumulate dead skin cells, which in turn can result in breeding conditions for microbes. The design of linear bristles may also damage sensitive skin if a user scrubs his/her skin rigorously with minimal lubrication provided by a dispensed cleansing agent. An insufficient cleansing agent being dispensed on the linear bristles during cleansing can cause abrasions and cuts in sensitive skin.

[0005] Furthermore, a conventional cleansing apparatus that is fixed to a bathroom wall is stationary and requires a user to move physically in an upward direction and a downward direction to produce a scrubbing action and cleanse the user's body. The user will have to physically change his/her position frequently to establish contact with the cleansing apparatus to cleanse the user's body part. This strenuous physical movement requires additional effort from the user, thereby causing fatigue while performing daily cleansing of the user's body. Some users, for example, elderly persons may find it difficult to use a stationary cleansing apparatus for performing a daily cleansing activity. Furthermore, a conventional cleansing apparatus that is rigidly fixed to a bathroom wall is difficult to maintain. Furthermore, in a household, there may be a large number of users with different physical attributes, for example, different heights. Conventional back cleansing apparatuses that

are typically fixed to bathroom walls may not be positioned to suit each user's height, thereby making it difficult for different users having different heights to use the same back cleansing apparatus.

[0006] Hence, there is a long felt need for a body cleansing apparatus that is accessible to all areas of the user's back or other body parts, without requiring any effort from the user for cleansing such body parts. Moreover, there is a need for a motorized body cleansing apparatus that moves in an upward direction and a downward direction automatically to produce an automated scrubbing action on a user's back or other body parts. Furthermore, there is a need for a body cleansing apparatus comprising bristle structures and other sponge based cleansing members that sufficiently collect, contain, retain, and dispense a cleansing agent for allowing the user to simultaneously brush and cleanse the user's body parts. Furthermore, there is a need for a position adjustable body cleansing apparatus that allows users of different heights to use the body cleansing apparatus without manually removing and fixing the body cleansing apparatus to a support structure to suit each user's height each time. Furthermore, there is a need for a body cleansing apparatus that can be detachably attached to a support structure, for example, a bathroom wall for convenient removal and maintenance of the body cleansing apparatus.

SUMMARY OF THE INVENTION

[0007] This summary is provided to introduce a selection of concepts in a simplified form that are further disclosed in the detailed description of the invention. This summary is not intended to determine the scope of the claimed subject matter.

[0008] The apparatus disclosed herein addresses the above recited needs for a detachable and washable body cleansing apparatus that is accessible to all areas of a user's back or other body parts, without requiring any effort from the user for cleansing such body parts. The body cleansing apparatus configured for cleansing the user's rear body part is detachably attachable to a support structure, for example, a wall by one or more fasteners, for example, hook and loop fasteners, suction cups, etc. The apparatus disclosed herein also addresses the above recited need for a motorized body cleansing apparatus that moves in an upward direction and a downward direction automatically to produce an automated scrubbing action on a user's back or other body parts. The motorized body cleansing apparatus comprises a base plate, multiple rollers, a guide slide plate, a split cover plate, a motion transmission assembly, and a base member. The base plate comprises a front surface and a rear surface. The rear surface of the base plate is detachably attached to a support structure using fasteners. The base plate comprises guideways positioned on the front surface of the base plate. The base plate further comprises a cavity configured between the guideways on the front surface of the base plate. The rollers are positioned in the guideways of the base plate. The rollers roll within the guideways of the base plate. The guide slide plate is positioned on the rollers at the front surface of the base plate. The guide slide plate comprises elongate guide projections extending from a rear surface of the guide slide plate. The elongate guide projections of the guide slide plate slide on the rollers at the front surface of the base plate.

[0009] The split cover plate of the motorized body cleansing apparatus is positioned between the base plate and the

guide slide plate. The split cover plate comprises a securing element and a cap element. The securing element is fixedly attached to a body section of the base plate. The securing element comprises multiple vertical slots configured to accommodate the elongate guide projections of the guide slide plate. The cap element is fixedly attached to an upper section of the base plate. The cap element secures the guide slide plate to the base plate to preclude the guide slide plate from sliding out of the base plate. The motion transmission assembly is positioned in the cavity of the base plate and is operably coupled to the guide slide plate. The motion transmission assembly moves the guide slide plate in an upward direction and a downward direction over the rollers. The base member is detachably attached to a front surface of the guide slide plate using fasteners. The base member comprises one or more contoured profiles configured to conform to a user's body part. In an embodiment, the base member is configured to conform to a rear body part of the user, that is, the user's back, neck, shoulders, etc., for cleansing the user's rear body part. The base member further comprises one or more cleansing members attached to a front surface of the base member for cleansing the body part when the body part contacts and applies a pressure on the cleansing members, while the motion transmission assembly moves the guide slide plate with the detachably attached base member in the upward direction and the downward direction.

[0010] The body cleansing apparatus disclosed herein also addresses the above recited need for cleansing members comprising bristle structures and other sponge based cleansing members that sufficiently collect, contain, retain, and dispense a cleansing agent for allowing the user to simultaneously brush and cleanse the user's body parts. The cleansing members are positioned and attached at multiple locations on one or more of the contoured profiles of the base member. In an embodiment, one or more of the cleansing members are detachably attachable to one or more of multiple locations on one or more of the contoured profiles of the base member for allowing the user to flexibly configure the cleansing members on the base member for cleansing the user's body part.

[0011] In an embodiment, one or more of the cleansing members comprise a stem and a cluster of flexible bristles. The stem of each cleansing member is attached to and extends outwardly from a front surface of the base member. The flexible bristles in each cluster curvedly branch outwards from an upper end of the stem and define a reservoir within each cluster. The reservoir stores and retains a cleansing agent and releases the cleansing agent along the flexible bristles when the user's body part contacts and applies a pressure, for example, on the stem of each cleansing member. Each cluster of flexible bristles comprises a central flexible bristle extending from the upper end of the stem, and radial flexible bristles surrounding the central flexible bristle. In an embodiment, one or more of the flexible bristles in the cluster comprise one or more apertures positioned on a body of each of the flexible bristles. The apertures dispense the cleansing agent contained within the stem. In an embodiment, one or more of the flexible bristles in the cluster comprise a spoon section that defines the reservoir. The spoon section collects and retains the cleansing agent for cleansing the user's body part.

[0012] In another embodiment, one or more of the cleansing members comprise one or more generally concave

troughs positioned at a base of each of the flexible bristles in the cluster where each of the flexible bristles meets the stem of the corresponding cleansing member. The generally concave troughs are configured to contain the cleansing agent. In another embodiment, one or more of the flexible bristles in the cluster are configured in a wide generally concave configuration that defines the reservoir. The flexible bristles in the wide generally concave configuration collect and retain the cleansing agent for cleansing the user's body part.

[0013] In an embodiment, the base member of the body cleansing apparatus further comprises a bladder for storing and containing the cleansing agent. The stored cleansing agent is drawn from the bladder through the stem of a cleansing member and out through one or more apertures positioned on the body of each of the flexible bristles in the cluster of the cleansing member, when the user's body part contacts and applies a pressure on the stem for dispensing the cleansing agent. The stem of each of the cleansing members comprises a cavity, in fluid communication with the bladder defined within the base member, for extracting the cleansing agent stored in the bladder, and for containing and dispensing the cleansing agent through one or more apertures positioned on the body of each of the flexible bristles in the cluster for cleansing the user's body part, when the user's body part contacts and applies a pressure on the stem.

[0014] In an embodiment, one or more of the cleansing members are single elongate flexible bristles attached to and extending outwardly from the base member. In an embodiment, each of the flexible bristles comprises a flexible tip configured to contact and cleanse the user's body part. In another embodiment, the body cleansing apparatus disclosed herein further comprises a spring member operably connected to a lower end of the cleansing members for enabling the flexible movement of each of the cleansing members during cleansing of the body part. The flexible bristles coated with the cleansing agent allow the user to cleanse the body part when the body part contacts and applies a pressure on the flexible bristles.

[0015] In another embodiment, the cleansing member of the body cleansing apparatus disclosed herein comprises a retention member and flexible bristles of configurable dimensions. The retention member is, for example, a porous water absorbent body made of a sponge material. The retention member is fixedly attached to a front surface of the base member. The retention member comprises multiple cavities for accommodating multiple flexible bristles. In an embodiment, the cavities of the retention member are configured as holes for draining fluids that pass through the retention member. The retention member retains a cleansing agent dispensed on the retention member. The flexible bristles are fixedly attached to the base member and positioned within the cavities of the retention member. The flexible bristles with the retention member cleanse the user's body part when the body part contacts and applies a pressure on the cleansing member.

[0016] In another embodiment, the cleansing members of the body cleansing apparatus disclosed herein are positioned and attached at multiple locations on the contoured profiles of the base member. Each cleansing member comprises a stem, a cluster of flexible bristles, and a retention member. The stem is attached to and extends outwardly from the base member. In an embodiment, the flexible bristles in the

cluster curvedly branch outwards from an upper end of the stem. The retention member is detachably attached to one or more of the flexible bristles. The retention member retains a cleansing agent dispensed on the retention member and cleanses the body part, when the body part contacts and applies a pressure on the flexible bristles with the retention member. In another embodiment, the body cleansing apparatus disclosed herein comprises a combination of different types of cleansing members disclosed above positioned on predefined or configurable locations on the base member.

[0017] The apparatus disclosed herein also addresses the above recited need for a position adjustable body cleansing apparatus that allows users of different heights to use the body cleansing apparatus without manually removing and fixing the body cleansing apparatus to a support structure, for example, a bathroom wall to suit each user's height each time. Furthermore, the apparatus disclosed herein addresses the above recited need for a body cleansing apparatus that can be detachably attached to a support structure for convenient removal and maintenance of the body cleansing apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The foregoing summary, as well as the following detailed description of the invention, is better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, exemplary constructions of the invention are shown in the drawings. However, the invention is not limited to the specific methods and structures disclosed herein. The description of a method step or a structure referenced by a numeral in a drawing is applicable to the description of that method step or structure shown by that same numeral in any subsequent drawing herein.

[0019] FIG. 1 exemplarily illustrates a front isometric view of a body cleansing apparatus, showing a projected enlarged view of one of multiple cleansing members positioned on a base member of the body cleansing apparatus.

[0020] FIG. 2 exemplarily illustrates a front isometric view of the body cleansing apparatus, showing sections taken along multiple contoured profiles of the base member.

[0021] FIG. 3A exemplarily illustrates a sectional view of the body cleansing apparatus taken along a section A-A' of FIG. 2.

[0022] FIG. 3B exemplarily illustrates a sectional view of the body cleansing apparatus taken along a section B-B' of FIG. 2.

[0023] FIG. 3C exemplarily illustrates a sectional view of the body cleansing apparatus taken along a section C-C' of FIG. 2.

[0024] FIG. 3D exemplarily illustrates a sectional view of the body cleansing apparatus taken along a section D-D' of FIG. 2.

[0025] FIG. 4 exemplarily illustrates a right side elevation view of the body cleansing apparatus.

[0026] FIG. 5 exemplarily illustrates a top view of the body cleansing apparatus.

[0027] FIG. 6 exemplarily illustrates a bottom view of the body cleansing apparatus.

[0028] FIG. 7 exemplarily illustrates an isometric view of a cleansing member.

[0029] FIG. 8 exemplarily illustrates a sectional view of the cleansing member taken along a section X-X' of FIG. 7.

[0030] FIG. 9 exemplarily illustrates a top view of the cleansing member.

[0031] FIG. 10A exemplarily illustrates an enlarged isometric view of an embodiment of the cleansing member attached to a front surface of the base member of the body cleansing apparatus, where a stem of the cleansing member comprises a cavity, in fluid communication with a bladder in the base member that contains a cleansing agent.

[0032] FIG. 10B exemplarily illustrates an enlarged isometric view of the embodiment of the cleansing member shown in FIG. 10A, attached to the base member of the body cleansing apparatus, showing a section Y-Y' taken along the cleansing member.

[0033] FIG. 10C exemplarily illustrates an enlarged sectional view of the embodiment of the cleansing member attached to the base member of the body cleansing apparatus, taken along the section Y-Y' of FIG. 10B, showing a cavity within the stem of the cleansing member, in fluid communication with the bladder in the base member that contains a cleansing agent.

[0034] FIG. 11 exemplarily illustrates an enlarged sectional view of an embodiment of the cleansing member attached to the base member of the body cleansing apparatus, showing the cavity in the stem of the cleansing member, in fluid communication with an extended bladder defined in the base member.

[0035] FIG. 12A exemplarily illustrates an isometric view of an embodiment of the cleansing member, showing a flexible bristle in a cluster of flexible bristles, in a wide generally concave configuration that defines a reservoir for collecting and retaining a cleansing agent for cleansing a body part.

[0036] FIG. 12B exemplarily illustrates an enlarged sectional view of the embodiment of the cleansing member shown in FIG. 12A, attached to the base member of the body cleansing apparatus, where the stem of the cleansing member comprises a cavity in fluid communication with the bladder defined in the base member, for dispensing the cleansing agent stored in the bladder into the reservoir defined by a flexible bristle in the cluster.

[0037] FIG. 13 exemplarily illustrates an enlarged isometric view of an embodiment of the cleansing member attached to the base member of the body cleansing apparatus, where one of the flexible bristles comprises a spoon section that defines a reservoir for collecting and retaining a cleansing agent dispensed from a cavity in the stem of the cleansing member.

[0038] FIG. 14 exemplarily illustrates a top view of an embodiment of the cleansing member having wide generally concave shaped flexible bristles that collect and retain a cleansing agent.

[0039] FIG. 15 exemplarily illustrates an isometric view of an embodiment of the cleansing member, where one of the flexible bristles comprises a wide spoon section that defines a reservoir for collecting and retaining a cleansing agent.

[0040] FIG. 16 exemplarily illustrates an enlarged sectional view of an embodiment of the cleansing member, where the flexible bristles comprise generally concave troughs positioned at a base of each of the flexible bristles.

[0041] FIG. 17 exemplarily illustrates a front isometric view of an embodiment of the body cleansing apparatus, showing a projected enlarged view of a combination of two

types of cleansing members positioned on the base member of the body cleansing apparatus.

[0042] FIG. 18 exemplarily illustrates an isometric view of an embodiment of the cleansing member.

[0043] FIG. 19 exemplarily illustrates a top view of the embodiment of the cleansing member shown in FIG. 18.

[0044] FIG. 20 exemplarily illustrates a side elevation view of the embodiment of the cleansing member shown in FIG. 18.

[0045] FIG. 21 exemplarily illustrates an isometric view of the embodiment of the cleansing member, showing a section Z-Z' taken along the cleansing member.

[0046] FIG. 22 exemplarily illustrates a sectional view of the embodiment of the cleansing member attached to the front surface of the base member, taken along the section Z-Z' of FIG. 21.

[0047] FIG. 23 exemplarily illustrates a front isometric view of an embodiment of the body cleansing apparatus, showing a projected enlarged view of a combination of two types of cleansing members positioned on the base member of the body cleansing apparatus, where each of the cleansing members comprises apertures for dispensing a cleansing agent.

[0048] FIGS. 24A-24B exemplarily illustrate an embodiment of the body cleansing apparatus, showing a spring member operably connected to a lower end of each of the cleansing members.

[0049] FIG. 25 exemplarily illustrates an embodiment of the body cleansing apparatus, showing a cleansing member detachably attachable to the base member.

[0050] FIG. 26 exemplarily illustrates a rear elevation view of the body cleansing apparatus, showing fasteners attached to a rear surface of the base member for detachably attaching the body cleansing apparatus to a support structure.

[0051] FIG. 27 exemplarily illustrates a right side elevation view of the body cleansing apparatus, showing fasteners attached to the rear surface of the base member for detachably attaching the body cleansing apparatus to a support structure.

[0052] FIG. 28 exemplarily illustrates attachment of the body cleansing apparatus to a support structure using fasteners.

[0053] FIG. 29 exemplarily illustrates an embodiment of the body cleansing apparatus, showing the body cleansing apparatus rollably wrapped around spaced apart elongate rods.

[0054] FIG. 30 exemplarily illustrates an embodiment of the body cleansing apparatus, showing the base member configured as a wearable unit that conforms to a hand of a user.

[0055] FIG. 31 exemplarily illustrates a sectional view of the embodiment of the body cleansing apparatus shown in FIG. 30, showing an insert member extending outwardly from the wearable unit and containing a cleansing agent.

[0056] FIG. 32 exemplarily illustrates a method for cleansing a body part of a user.

[0057] FIG. 33 exemplarily illustrates a side perspective view of an embodiment of the cleansing member attached to the front surface of the base member of the body cleansing apparatus, showing a retention member attached to one of multiple flexible bristles of the cleansing member.

[0058] FIG. 34 exemplarily illustrates an embodiment of the method for cleansing a body part of a user.

[0059] FIG. 35A exemplarily illustrates a front elevation view of a retention member of an embodiment of the cleansing member, showing multiple cavities of the retention member.

[0060] FIG. 35B exemplarily illustrates a sectional view of the retention member taken along a section M-M' of FIG. 35A, showing multiple cavities of the retention member.

[0061] FIG. 35C exemplarily illustrates a partial sectional view of an embodiment of the body cleansing apparatus detachably attachable to a support structure, showing the cleansing member comprising the retention member and multiple flexible bristles attached to the base member.

[0062] FIG. 36A exemplarily illustrates a disassembled, partial sectional view of an embodiment of the body cleansing apparatus detachably attachable to a support structure, showing a combination of cleansing members attachable to the base member.

[0063] FIG. 36B exemplarily illustrates a partial sectional view of an assembled body cleansing apparatus comprising the combination of cleansing members and detachably attached to a support structure.

[0064] FIG. 37 exemplarily illustrates a top plan view of an embodiment of the cleansing member of the body cleansing apparatus, showing an arrangement of central flexible bristles and radial flexible bristles.

[0065] FIG. 38 exemplarily illustrates a sectional view of an embodiment of the cleansing member of the body cleansing apparatus taken along a section N-N' of FIG. 37.

[0066] FIG. 39A exemplarily illustrates a front elevation view of an embodiment of the body cleansing apparatus, showing a combination of different cleansing members attached to the base member.

[0067] FIG. 39B exemplarily illustrates a disassembled sectional view of the embodiment of the body cleansing apparatus taken along a section O-O' of FIG. 39A.

[0068] FIG. 40 exemplarily illustrates a front elevation view of an embodiment of the body cleansing apparatus, showing a combination of different cleansing members attached to the base member.

[0069] FIG. 41 exemplarily illustrates a disassembled view of an embodiment of the body cleansing apparatus, showing a position adjustment device.

[0070] FIG. 42 exemplarily illustrates a rear elevation view of an embodiment of the base member of the body cleansing apparatus, showing multiple snap fasteners attached to the rear surface of the base member to facilitate attachment of the base member to the position adjustment device shown in FIG. 41.

[0071] FIG. 43 exemplarily illustrates an assembled left side elevation view of an embodiment of the body cleansing apparatus, showing the position adjustment device.

[0072] FIG. 44 exemplarily illustrates an assembled front perspective view of an embodiment of the body cleansing apparatus, showing adjustable positioning of the body cleansing apparatus using the position adjustment device.

[0073] FIG. 45A exemplarily illustrates a rear elevation view of an embodiment of the base member configured as a membrane.

[0074] FIG. 45B exemplarily illustrates a left side elevation view of the embodiment of the base member configured as a membrane.

[0075] FIG. 46A exemplarily illustrates a rear elevation view of the embodiment of the base member configured as

a membrane shown in FIG. 45A, showing strips of fasteners attached to the rear surface of the base member.

[0076] FIG. 46B exemplarily illustrates a left side elevation view of the embodiment of the base member configured as a membrane shown in FIG. 46A, showing detachable attachment of the base member to a support structure using fasteners.

[0077] FIG. 47 exemplarily illustrates an embodiment of the method for cleansing a body part of a user.

[0078] FIG. 48 exemplarily illustrates a rear exploded view of a motorized body cleansing apparatus.

[0079] FIG. 49 exemplarily illustrates a left side exploded view of the motorized body cleansing apparatus.

[0080] FIG. 50 exemplarily illustrates a front isometric view of a base plate of the motorized body cleansing apparatus shown in FIG. 48.

[0081] FIG. 51 exemplarily illustrates a front elevation, partial sectional view of the base plate.

[0082] FIG. 52 exemplarily illustrates a front, partial exploded view of a motion transmission assembly of the motorized body cleansing apparatus.

[0083] FIG. 53 exemplarily illustrates a front isometric view of the motion transmission assembly, showing alignment of transmission members of the motion transmission assembly.

[0084] FIG. 54 exemplarily illustrates a front isometric view of the motion transmission, showing engagement of the transmission members of the motion transmission assembly.

[0085] FIG. 55A exemplarily illustrates a front elevation view of a split cover plate of the motorized body cleansing apparatus shown in FIG. 48, when a guide slide plate of the motorized body cleansing apparatus positioned in front of the split cover plate is in an upward position.

[0086] FIG. 55B exemplarily illustrates a front elevation view of the split cover plate when the guide slide plate positioned in front of the split cover plate is in a downward position.

[0087] FIG. 56 exemplarily illustrates a front perspective, partial disassembled view, showing positioning of elongate guide projections of the guide slide plate in vertical slots of a securing element of the split cover plate.

[0088] FIG. 57 exemplarily illustrates a front isometric view of the guide slide plate secured to the base plate via the split cover plate.

[0089] FIG. 58 exemplarily illustrates a front isometric view of the motorized body cleansing apparatus, showing the base member attached to the guide slide plate.

[0090] FIG. 59A exemplarily illustrates a top plan, partial disassembled view of the motorized body cleansing apparatus detachably attachable to a support structure.

[0091] FIG. 59B exemplarily illustrates a top plan view of the assembled motorized body cleansing apparatus detachably attached to the support structure.

[0092] FIG. 60A exemplarily illustrates a left side elevation view of the motorized body cleansing apparatus, showing movement of the guide slide plate with the base member in an upward direction.

[0093] FIG. 60B exemplarily illustrates a left side elevation view of the motorized body cleansing apparatus, showing movement of the guide slide plate with the base member in a downward direction.

DETAILED DESCRIPTION OF THE INVENTION

[0094] FIG. 1 exemplarily illustrates a front isometric view of a body cleansing apparatus 100, showing a projected enlarged view of one of multiple cleansing members 103 positioned on a base member 101 of the body cleansing apparatus 100. The body cleansing apparatus 100 comprises a base member 101 and multiple cleansing members 103 positioned on the base member 101. The base member 101 comprises one or more contoured profiles 102a and 102b configured to conform to a user's body part, for example, a user's back, neck, shoulders, etc. As exemplarily illustrated in FIGS. 1-2, FIGS. 4-6, FIG. 17, FIG. 23, and FIGS. 26-28, FIG. 35A, FIG. 39A, FIG. 40, FIG. 42, FIG. 44, FIG. 45A, FIG. 46A, FIG. 48, and FIG. 58, the base member 101 is, for example, of a generally rectangular shape configured to conform to a user's rear body part and used to cleanse rear areas of the user's body, for example, the user's back. The base member 101 is, for example, made of a synthetic material, rubber, etc. In an embodiment, the base member 101 is backed with a foam material. A contoured profile 102a, for example, a spongy generally concave shaped hump at the center of the base member 101 is configured to the contour of the user's rear body part, for example, to a posterior curvature of the user's back. In an embodiment, the contoured profiles 102a and 102b of the base member 101 are customizable to any specific part or curvature of a user's rear body part. The contoured profiles 102a and 102b of the base member 101 taper downwardly to direct water, a cleansing agent 1001 exemplarily illustrated in FIG. 10A, FIG. 10C, FIG. 11, FIG. 12B, FIG. 13, and FIGS. 15-16, etc., away from the body cleansing apparatus 100 during cleansing. The cleansing members 103 are positioned and attached at multiple locations on one or more of the contoured profiles 102a and 102b of the base member 101. The structure of a cleansing member 103 comprising a stem 104 and a cluster 105 of flexible bristles 106 is disclosed in the detailed description of FIG. 7.

[0095] FIG. 2 exemplarily illustrates a front isometric view of the body cleansing apparatus 100, showing sections taken along multiple contoured profiles 102a and 102b of the base member 101. The sections A-A', B-B', C-C', and D-D' of the base member 101 taken along different contoured profiles, for example, 102a and 102b of the base member 101 are exemplarily illustrated in FIGS. 3A-3D respectively.

[0096] FIG. 3A exemplarily illustrates a sectional view of the body cleansing apparatus 100 taken along a section A-A' of FIG. 2. As exemplarily illustrated in FIG. 3A, the cleansing members 103, each comprising a stem 104 and a cluster 105 of flexible bristles 106, are positioned and attached along the contoured profile 102a of the base member 101. The cleansing members 103 along the contoured profile 102a configured at the center of the base member 101 follow a contour of the user's back to cleanse the user's back.

[0097] FIG. 3B exemplarily illustrates a sectional view of the body cleansing apparatus 100 taken along a section B-B' of FIG. 2. As exemplarily illustrated in FIG. 3B, the cleansing members 103, each comprising a stem 104 and a cluster 105 of flexible bristles 106, are positioned and attached along the contoured profile 102b of the base member 101. The cleansing members 103 along the contoured profile 102b configured proximal to the bottom end 101a of the base member 101 exemplarily illustrated in FIG. 2, cleanse the

user's lower back. The base member **101** of the body cleansing apparatus **100** tapers downwardly along the contoured profile **102b** to facilitate removal of a cleansing agent **1001**, for example, liquid soap exemplarily illustrated in FIG. 10A, FIG. 10C, FIG. 11, FIG. 12B, FIG. 13, and FIGS. 15-16, and water from the body cleansing apparatus **100**, during cleansing.

[0098] FIG. 3C exemplarily illustrates a sectional view of the body cleansing apparatus **100** taken along a section C-C' of FIG. 2. As exemplarily illustrated in FIG. 3C, the cleansing members **103**, each comprising a stem **104** and a cluster **105** of flexible bristles **106**, are positioned and attached along the sides **101b** of the base member **101** exemplarily illustrated in FIG. 2.

[0099] FIG. 3D exemplarily illustrates a sectional view of the body cleansing apparatus **100** taken along a section D-D' of FIG. 2. As exemplarily illustrated in FIG. 3D, the cleansing members **103**, each comprising a stem **104** and a cluster **105** of flexible bristles **106**, are positioned and attached at the bottom end **101a** of the base member **101** exemplarily illustrated in FIG. 2.

[0100] FIGS. 4-6 exemplarily illustrate a right side elevation view, a top view, and a bottom view respectively, of the body cleansing apparatus **100**. The contoured profiles **102a** and **102b** of the base member **101** are exemplarily illustrated in FIGS. 4-6.

[0101] FIG. 7 exemplarily illustrates an isometric view of a cleansing member **103**. The cleansing member **103**, exemplarily illustrated in FIG. 7, comprises a stem **104** and a cluster **105** of flexible bristles **106**. The stem **104** is attached to and extends outwardly from the base member **101** of the body cleansing apparatus **100** as exemplarily illustrated in FIG. 1. The flexible bristles **106** in the cluster **105** curvedly branch outwards from an upper end **104a** of the stem **104** and define a reservoir **110** within each cluster **105** as exemplarily illustrated in FIGS. 12A-12B, FIG. 13, and FIGS. 15-16. The reservoir **110** prevents the cleansing agent **1001** exemplarily illustrated in FIG. 12B, FIG. 13, and FIGS. 15-16, from draining out of the cluster **105**, thereby preventing wastage of the cleansing agent **1001** during cleansing of the user's body part. The cluster **105** of flexible bristles **106** comprises a central flexible bristle **106a** extending from the upper end **104a** of the stem **104**, and radial flexible bristles **106b** surrounding the central flexible bristle **106a**. The radial flexible bristles **106b** curvedly branch outwards from the upper end **104a** of the stem **104**. In an embodiment, the radial flexible bristles **106b** are longer than the central flexible bristle **106a**. In an embodiment, each cluster **105** has a configurable number of radial flexible bristles **106b** surrounding the central flexible bristle **106a**. In an embodiment, the flexible bristles **106a** and **106b** in each cluster **105** taper toward their corresponding tips **106c** and **106d** respectively. The flexible bristles **106** grip, for example, the user's back during cleansing. The flexible bristles **106** are, for example, made from a rubber material, a silicone rubber material, or any type of flexible material.

[0102] FIG. 8 exemplarily illustrates a sectional view of the cleansing member **103** taken along a section X-X' of FIG. 7. The sectional view in FIG. 8 shows the central flexible bristle **106a** and the radial flexible bristles **106b** of the cleansing member **103**. In an embodiment, a configurable number of clusters **105** of flexible bristles **106** are detachably attached per square inch on a front surface **101c**

of the base member **101** and extend approximately one inch away from the base member **101**.

[0103] FIG. 9 exemplarily illustrates a top view of the cleansing member **103**. The tips **106c** and **106d** of the central flexible bristle **106a** and the radial flexible bristles **106b** respectively, of the cluster **105** are exemplarily illustrated in FIG. 9. The tip **106c** of the central flexible bristle **106a** is broader in comparison to the tips **106d** of the radial flexible bristles **106b**. In an embodiment, each of the flexible bristles **106** comprises a flexible tip **106c** or **106d** configured to contact and cleanse the user's body part. The flexible tip **106c** or **106d** of each of the flexible bristles **106** is, for example, made from a rubber material or any type of flexible material.

[0104] FIG. 10A exemplarily illustrates an enlarged isometric view of an embodiment of the cleansing member **103** attached to the front surface **101c** of the base member **101** of the body cleansing apparatus **100** exemplarily illustrated in FIG. 2, where the stem **104** of the cleansing member **103** comprises a cavity **107**, in fluid communication with a bladder **108** in the base member **101** that contains a cleansing agent **1001**. In an embodiment, one or more of the flexible bristles **106** in the cluster **105** comprise one or more apertures **106e** and **106f** positioned on bodies of the flexible bristles **106**. The apertures **106e** and **106f** are configured to dispense the cleansing agent **1001** contained within the stem **104**. As exemplarily illustrated in FIG. 10A, the central flexible bristle **106a** of the cluster **105** comprises an aperture **106e** on the tip **106c** of the central flexible bristle **106a** and additional apertures **106f** on the sides **106g** and **106h** of the central flexible bristle **106a**. In an embodiment, the base member **101** further comprises a bladder **108** for storing and containing the cleansing agent **1001**.

[0105] As exemplarily illustrated in FIGS. 10A and FIG. 10C, a cylindrical bladder **108** that stores the cleansing agent **1001** extends from the lower end **104b** of the stem **104** of the cleansing member **103** on the front surface **101c** of the base member **101** to a rear surface **101d** of the base member **101**. The stored cleansing agent **1001** is drawn from the bladder **108** through the stem **104** and out through one or more apertures **106e** and **106f** positioned on the central flexible bristle **106a**, when the user's body part contacts and applies a pressure on the stem **104** for dispensing the cleansing agent **1001**. The stem **104** of the cleansing member **103** comprises a cavity **107**, in fluid communication with the bladder **108** defined within the base member **101**, for extracting the cleansing agent **1001** stored in the bladder **108**, and for containing and dispensing the cleansing agent **1001** through one or more apertures **106e** and **106f** positioned, for example, on the central flexible bristle **106a** for cleansing the user's body part, when the user's body part contacts and applies a pressure on the stem **104**. As exemplarily illustrated in FIG. 10A, the cleansing agent **1001** is drawn from the bladder **108** through the cavity **107** and out through the aperture **106e** on the tip **106c** of the central flexible bristle **106a**, when the user's body part contacts and applies a pressure on the stem **104**.

[0106] In another embodiment, any two of the flexible bristles **106b** can be joined together to create a web (not shown) for collecting the cleansing agent **1001**, for example, soap particulates within the cluster **105** of flexible bristles **106**.

[0107] FIG. 10B exemplarily illustrates an enlarged isometric view of the embodiment of the cleansing member **103**

shown in FIG. 10A, attached to the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, showing a section Y-Y' taken along the cleansing member 103.

[0108] FIG. 10C exemplarily illustrates an enlarged sectional view of the embodiment of the cleansing member 103 attached to the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, taken along the section Y-Y' of FIG. 10B, showing a cavity 107 within the stem 104 of the cleansing member 103, in fluid communication with the bladder 108 in the base member 101 that contains a cleansing agent 1001. As exemplarily illustrated in FIG. 10C, the cleansing agent 1001 is drawn from the bladder 108 through the cavity 107 and out through the apertures 106e and 106f of the central flexible bristle 106a, when the user's body part contacts and applies a pressure on the stem 104.

[0109] FIG. 11 exemplarily illustrates an enlarged sectional view of an embodiment of the cleansing member 103 attached to the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, showing the cavity 107 in the stem 104 of the cleansing member 103, in fluid communication with an extended bladder 108 defined in the base member 101. In an embodiment, an extended bladder 108 is defined within the base member 101 for storing the cleansing agent 1001. As exemplarily illustrated in FIG. 11, the cavity 107 communicates with the extended bladder 108 defined within the base member 101, for extracting the cleansing agent 1001 stored in the extended bladder 108, containing, and dispensing the cleansing agent 1001 through the apertures 106e and 106f positioned on the central flexible bristle 106a for cleansing the user's body part, when the user's body part contacts and applies a pressure on the stem 104. The cleansing agent 1001 is dispensed from the cavity 107 towards the tips 106c and 106d of any of the flexible bristles 106 via their apertures 106e and 106f respectively, for cleansing the user's body part. For example, the cleansing agent 1001 such as liquid soap is dispensed through the tip 106c of the central flexible bristle 106a via its aperture 106e, when a user's body part, for example, the user's back applies a pressure to the stem 104. In another embodiment, the cleansing agent 1001 is dispensed from the cavity 107 towards the tip 106d of any of the other flexible bristles 106b.

[0110] When the user's body part contacts and pushes against the central flexible bristle 106a, the cleansing agent 1001 is dispensed from the cavity 107 towards the tip 106c of the central flexible bristle 106a and then onto the user's body part that contacts the tip 106c. In an embodiment, any other flexible bristle 106b comprises a cavity similar to the cavity 107 for containing and dispensing the cleansing agent 1001.

[0111] FIG. 12A exemplarily illustrates an isometric view of an embodiment of the cleansing member 103, showing a flexible bristle 109 in the cluster 105 of flexible bristles 106, in a wide generally concave configuration that defines a reservoir 110 for collecting and retaining a cleansing agent 1001 exemplarily illustrated in FIG. 12B, for cleansing a user's body part. The reservoir 110 receives, stores, and retains a cleansing agent 1001 as exemplarily illustrated in FIG. 12B, FIG. 13, and FIGS. 15-16, and releases the cleansing agent 1001 along the flexible bristles 106 when the user's body part contacts and applies a pressure on the stem 104 of the cleansing member 103.

[0112] FIG. 12B exemplarily illustrates an enlarged sectional view of the embodiment of the cleansing member 103 shown in FIG. 12A, attached to the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, where the stem 104 of the cleansing member 103 comprises a cavity 107 in fluid communication with the bladder 108 defined in the base member 101, for dispensing a cleansing agent 1001, for example, soap stored in the bladder 108 into the reservoir 110 defined by a flexible bristle 109 in the cluster 105. When the body cleansing apparatus 100 is attached to a support structure 2801, for example, a wall as exemplarily illustrated in FIG. 28, the cleansing member 103 exemplarily illustrated in FIG. 12A, attached to the base member 101 is oriented in a generally horizontal position as exemplarily illustrated in FIG. 12B. When the user's body part contacts and pushes against the central flexible bristle 106a of the cleansing member 103, the cleansing agent 1001 dispenses from the cavity 107 through the apertures 106e and 106f of the central flexible bristle 106a and collects in the reservoir 110 defined by the flexible bristle 109 which is in the wide generally concave configuration, thereby retaining the cleansing agent 1001 within the cluster 105 as exemplarily illustrated in FIG. 12B, for cleansing the user's body part. The cleansing agent 1001 coats the flexible bristles 106 and allows the application of the cleansing agent 1001 on the user's body part when the body part contacts and applies a pressure on the flexible bristles 106.

[0113] FIG. 13 exemplarily illustrates an enlarged isometric view of an embodiment of the cleansing member 103 attached to the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, where a flexible bristle 109 comprises a spoon section 111 that defines a reservoir 110 for collecting and retaining a cleansing agent 1001 dispensed from a cavity 107 in the stem 104 of the cleansing member 103. In this embodiment, a flexible bristle 109 that is in the wide generally concave configuration comprises the spoon section 111 that defines the reservoir 110. When the user's body part contacts and pushes against the central flexible bristle 106a of the cleansing member 103, the cleansing agent 1001 dispenses from the cavity 107 through the apertures 106e and 106f of the central flexible bristle 106a and collects in the reservoir 110 defined by the spoon section 111. The cleansing agent 1001, for example, soap settles in the spoon section 111, thereby retaining the cleansing agent 1001 within the cluster 105 as exemplarily illustrated in FIG. 13, for cleansing the user's body part.

[0114] FIG. 14 exemplarily illustrates a top view of an embodiment of the cleansing member 103 having wide generally concave shaped flexible bristles 109 that collect and retain a cleansing agent 1001 exemplarily illustrated in FIG. 12B and FIG. 13. In this embodiment, all the flexible bristles 109 in the clusters 105 have a wide generally concave configuration for collecting and retaining the cleansing agent 1001 within the cluster 105 of the cleansing member 103.

[0115] FIG. 15 exemplarily illustrates an isometric view of an embodiment of the cleansing member 103, where a flexible bristle 109 comprises a wide spoon section 111 that defines a reservoir 110 for collecting and retaining a cleansing agent 1001. The cleansing agent 1001 may, for example, be introduced into the wide spoon section 111 by the user or dispensed from a cavity 107 in the stem 104 exemplarily

illustrated in FIGS. 12A-12B and FIG. 13, through the apertures 106e and 106f, for example, in the central flexible bristle 106a and into the wide spoon section 111 for cleansing the user's body part.

[0116] FIG. 16 exemplarily illustrates an enlarged sectional view of an embodiment of the cleansing member 103, where the flexible bristles 106 and 109 comprise generally concave troughs 112 positioned at a base of each of the flexible bristles 106 and 109. The generally concave troughs 112 are positioned at the base of each of the flexible bristles 106 and 109 in the cluster 105 where each of the flexible bristles 106 and 109 meets the stem 104 of the cleansing member 103. The generally concave troughs 112 are circular, channel shaped around the central flexible bristle 106a. The generally concave troughs 112 are configured to contain the cleansing agent 1001. The cleansing agent 1001 is dispensed from the generally concave troughs 112 on application of a pressure on the flexible bristles 106 and 109 by the user's body part, for example, the user's back. FIG. 16 also shows the spoon section 111 in the flexible bristle 109 having a wide generally concave configuration that defines the reservoir 110 for collecting and retaining the cleansing agent 1001. As exemplarily illustrated in FIG. 16, the generally concave trough 112 provided at the base of the flexible bristle 109 is in communication with the concave spoon section 111 of the flexible bristle 109 to contain the cleansing agent 1001. The spoon section 111 in the flexible bristle 109 having a wide generally concave configuration and the generally concave troughs 112 prevent the cleansing agent 1001 from draining out when the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, is attached in a vertical position against a support structure 2801 such as a wall as exemplarily illustrated in FIG. 28. The cleansing agent 1001 is dispensed from the generally concave trough 112 at the base of the flexible bristle 109 and also from the concave spoon section 111 of the flexible bristle 109 on application of a pressure on the flexible bristles 106 and 109 by the user's back.

[0117] FIG. 17 exemplarily illustrates a front isometric view of an embodiment of the body cleansing apparatus 100, showing a projected enlarged view of a combination of two types of cleansing members 103 positioned on the base member 101 of the body cleansing apparatus 100. In an embodiment, in addition to the cleansing members 103 having stems 104 and clusters 105 of flexible bristles 106, the body cleansing apparatus 100 further comprises single elongate flexible bristles 113. The single elongate flexible bristles 113 are attached to and extend outwardly from the base member 101. As exemplarily illustrated in FIG. 17, the single elongate flexible bristles 113 along with the clusters 105 of flexible bristles 106 are positioned and attached at multiple locations on the contoured profiles 102a and 102b of the base member 101. The flexible bristles 106 and 113 are flexible and slightly firm and are made of, for example, rubber.

[0118] For purposes of illustration, the detailed description refers to two types of cleansing members 103 positioned on the base member 101 of the body cleansing apparatus 100 as exemplarily illustrated in FIG. 17; however the scope of the body cleansing apparatus 100 disclosed herein is not limited to a combination of only these two types of cleansing members 103, but may be extended to include a combination of any of the cleansing members 103 exemplarily illustrated

in FIG. 7, FIG. 10A, FIG. 11, FIG. 12A, FIGS. 13-16, and FIG. 18, and other cleansing members of different shapes, materials, and sizes.

[0119] FIGS. 18-22 exemplarily illustrate different views of an embodiment of the cleansing member 103. In this embodiment, the cleansing member 103 is a single elongate flexible bristle 113 with a flat rounded upper end or tip 113a and a generally circular lower end 113b. FIG. 18 exemplarily illustrates an isometric view of this embodiment of the cleansing member 103. FIG. 19 exemplarily illustrates a top view of this embodiment of the cleansing member 103. FIG. 20 exemplarily illustrates a side elevation view of this embodiment of the cleansing member 103. FIG. 21 exemplarily illustrates an isometric view of this embodiment of the cleansing member 103, showing a section Z-Z' taken along the cleansing member 103. FIG. 22 exemplarily illustrates a sectional view of the embodiment of the cleansing member 103 attached to the front surface 101c of the base member 101, taken along section Z-Z' of FIG. 21. The single elongate flexible bristle 113 is attached to and extends outwardly from the base member 101.

[0120] FIG. 23 exemplarily illustrates a front isometric view of an embodiment of the body cleansing apparatus 100, showing a projected enlarged view of a combination of two types of cleansing members 103 positioned on the base member 101 of the body cleansing apparatus 100, where each of the cleansing members 103 comprises apertures 106e, 106f and 113c and 113d for dispensing a cleansing agent 1001 exemplarily illustrated in FIG. 10A, FIG. 10C, FIG. 11, and FIG. 13. For example, the cleansing agent 1001 is dispensed from the cavity 107 of the central flexible bristle 106a in the cluster 105 and out through the apertures 106e and 106f of the central flexible bristles 106a as disclosed in the detailed description of FIG. 10A and FIG. 11. In an embodiment, the elongate flexible bristle 113 also comprises a cavity 113e, in fluid communication with the bladder 108 defined within the base member 101 exemplarily illustrated in FIG. 10A, FIG. 10C, and FIG. 11, for extracting the cleansing agent 1001 stored in the bladder 108, containing, and dispensing the cleansing agent 1001 through one or more apertures 113c and 113d positioned, for example, on the elongate flexible bristle 113 for cleansing the user's body part, when the user's body part contacts and applies a pressure on the elongate flexible bristle 113.

[0121] FIGS. 24A-24B exemplarily illustrate an embodiment of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, showing a spring member 114 operably connected to a lower end 104b or 113b of each of the cleansing members 103. The lower end 104b or 113b of each of the cleansing members 103 extends into the base member 101 from the front surface 101c of the base member 101. As exemplarily illustrated in FIG. 24A, the spring member 114 is operably connected to the lower end 104b of the stem 104 of each of the cleansing members 103. As exemplarily illustrated in FIG. 24B, the spring member 114 is operably connected to the lower end 113b of each of the single elongate flexible bristles 113. The spring member 114 enables flexible movement of each of the cleansing members 103 during cleansing of the user's body part.

[0122] FIG. 25 exemplarily illustrates an embodiment of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, showing a cleansing member 103 detachably attachable to the base member 101. In an embodiment, one or more of the cleansing members 103 are detachably attach-

able to one or more of multiple locations on one or more contoured profiles **102a** and **102b** of the base member **101** exemplarily illustrated in FIGS. 1-2 and FIGS. 4-6, for allowing the user to flexibly configure the cleansing members **103** on the base member **101** for the cleansing of the user's body part. For example, the user may attach multiple cleansing members **103** on the central contoured profile **102a** to particularly clean the posterior curvature of the user's back. A user may detach one or more of the cleansing members **103** and attach them to another contoured profile **102a** or **102b** of the base member **101**, for example, using glue, suction cups, etc.

[0123] FIGS. 26-27 exemplarily illustrate a rear elevation view and a right side elevation view respectively, of the body cleansing apparatus **100**, showing fasteners, for example, **115a** attached to the rear surface **101d** of the base member **101** for detachably attaching the body cleansing apparatus **100** to a support structure **2801** exemplarily illustrated in FIG. 28. In an example, strips **115** of hook sides or loop sides **115a** of hook and loop fasteners **2804** exemplarily illustrated in FIG. 28, such as Velcro® of Velcro Industries B. V. LLC, Netherlands, are used for detachably attaching the rear surface **101d** of the base member **101** of the body cleansing apparatus **100** to a support structure **2801**, for example, a wall of a bathroom. In an embodiment, the strips **115** of the hook sides or loop sides **115a** of the hook and loop fasteners **2804** are made of, for example, nylon, plastic, etc., with a height of, for example, about 26.5 inches, and a width of, for example, about 1.63 inches. The strips **115** are positioned, for example, at about 5.5 inches from the sides of the base member **101** with a gap of about 7.75 inches between the strips **115**. The hook and loop fasteners **2804** comprise hook sides **2802a** and loop sides **115a** as exemplarily illustrated in FIG. 28. The hook sides **2802a** or the loop sides **115a** of the hook and loop fasteners **2804** are affixed on the rear surface **101d** of the base member **101**, while an opposing one of the hook sides **2802a** or the loop sides **115a** of the hook and loop fasteners **2804** are attached to the support structure **2801** for allowing the detachable attachment of the body cleansing apparatus **100** to the support structure **2801**. For example, if the loop sides **115a** of the hook and loop fasteners **2804** are affixed on the rear surface **101d** of the base member **101** as exemplarily illustrated in FIGS. 26-28, the hook sides **2802a** of the hook and loop fasteners **2804** are attached to the support structure **2801** and vice versa as exemplarily illustrated in FIG. 28. The strips **115** of the loop sides **115a** of the hook and loop fasteners **2804** are affixed on the rear surface **101d** of the base member **101**, for example, by sewing, using adhesives, etc.

[0124] FIG. 28 exemplarily illustrates attachment of the body cleansing apparatus **100** to a support structure **2801** using fasteners **2804**. As exemplarily illustrated in FIG. 28, strips **2802** of the hook sides **2802a** of the hook and loop fasteners **2804** are attached to the support structure **2801**, for example, a wall. The corresponding loop sides **115a** of the hook and loop fasteners **2804** are attached to the rear surface **101d** of the base member **101** of the body cleansing apparatus **100**. A user may apply a pressure and push the rear surface **101d** of the base member **101** having the loop sides **115a** of the hook and loop fasteners **2804** against the hook sides **2802a** of the hook and loop fasteners **2804** on the support structure **2801** to attach the body cleansing apparatus **100** to the support structure **2801**. In an embodiment, the

strips **2802** on the support structure **2801** further comprise opposing loop extensions **2803a** and **2803b** positioned at opposing ends **2802b** and **2802c** of the strips **2802** respectively. The opposing loop extensions **2803a** and **2803b** facilitate removal of the loop sides **115a** of the hook and loop fasteners **2804** attached to the rear surface **101d** of the base member **101** from the hook sides **2802a** of the hook and loop fasteners **2804** attached to the front surface **2801a** of the support structure **2801**, that is, to allow a user to grasp the opposing loop extensions **2803a** and **2802b** and detach the body cleansing apparatus **100** from the support structure **2801**. The strips **2802** of the hook sides **2802a** of the hook and loop fasteners **2804** are, for example, about ½ inch nylon strips glued to the support structure **2801**. In an example, when the user wants to relocate the body cleansing apparatus **100**, the user can easily remove the strips **2802** from the support structure **2801**, for example, a bathroom wall, without removing any tiles or without damaging the support structure **2801**. The user may insert a screw driver through each of the opposing loops **2803** to remove the strips **2802** from the support structure **2801**.

[0125] In an embodiment, fasteners, for example, vacuum chucks, suction cups, etc., are also used for detachably attaching the body cleansing apparatus **100** to the support structure **2801**. The fasteners, for example, suction cups, on the rear surface **101d** of the base member **101** of the body cleansing apparatus **100** engage the support structure **2801** and create suction between the suction cups and the support structure **2801** to mount the body cleansing apparatus **100** to the support structure **2801**. In an example, four suction cups positioned proximal to the four corners of the base member **101** detachably attach the base member **101** of the body cleansing apparatus **100** to a bathroom wall. The suction cups hold the body cleansing apparatus **100** rigidly against the wall of the bathroom.

[0126] FIG. 29 exemplarily illustrates an embodiment of the body cleansing apparatus **100**, showing the body cleansing apparatus **100** rollably wrapped around spaced apart elongate rods **2901a** and **2901b**. In an embodiment, the elongate rods **2901a** and **2901b** are spaced apart and horizontally attached to a support structure **2801**, for example, a wall exemplarily illustrated in FIG. 28, using fasteners **2907**. In this embodiment, elongate rollers **2902a** and **2902b** are coaxially disposed around the elongate rods **2901a** and **2901b** respectively. The body cleansing apparatus **100** is configured to slidably roll over the elongate rollers **2902a** and **2902b**. A motor **2903** and a belt driven wheel assembly **2906** are also provided in this embodiment. The belt driven wheel assembly **2906** is operably connected to one of the elongate rollers **2902a** and **2902b**, for example, the lower elongate roller **2902b** for rolling the body cleansing apparatus **100** over the elongate rollers **2902a** and **2902b** and enhancing the cleansing of the user's body part. The belt driven wheel assembly **2906** comprises a reduction gear wheel **2905** and a belt drive **2904**. A shaft **2903a** of the motor **2903** is operably connected to the belt drive **2904** that is disposed around the reduction gear wheel **2905**. The reduction gear wheel **2905** is operably connected to one of the elongate rollers **2902a** and **2902b**, for example, the lower elongate roller **2902b**. When the motor **2903** is activated or powered on, the shaft **2903a** of the motor **2903** rotates and transmits a torque to the reduction gear wheel **2905** through the belt drive **2904**. The reduction gear wheel **2905** transmits the torque to the lower elongate roller **2902b**, which rolls

and causes the body cleansing apparatus **100** to slidably roll over the elongate rollers **2902a** and **2902b**. In an embodiment, a control unit (not shown) operably connected to the motor **2903** and the belt driven wheel assembly **2906** is used to control and change the direction of rolling of the body cleansing apparatus **100** to create a timed upward and downward rolling motion of the body cleansing apparatus **100**. The upward and downward rolling motion of the body cleansing apparatus **100** allows the user to stand still and clean his/her back without any effort. A switch (not shown) is provided to operate the motor **2903** to produce a driving torque that rolls the body cleansing apparatus **100**.

[0127] FIG. 30 exemplarily illustrates an embodiment of the body cleansing apparatus **3000**, showing the base member **101** configured as a wearable unit **3001** that conforms to a hand of a user. The wearable unit **3001** is shaped, for example, as a mitten or a glove. In this embodiment, the wearable unit **3001** comprises a chamber **3002** exemplarily illustrated in FIG. 31, for accommodating the user's hand. In an embodiment, the wearable unit **3001** comprises a single sheath **3001a** for enclosing the user's fingers and a thumb sheath **3001b** for enclosing the user's thumb. In another embodiment, the wearable unit **3001** comprises individual finger sheaths (not shown) for enclosing the user's fingers, and a thumb sheath **3001b** for enclosing the user's thumb. In an embodiment, the wearable unit **3001** comprises a selectively textured surface with varying levels of texture. For example, the wearable unit **3001** may have a roughened texture to aid in exfoliation during cleansing of a user's body part, a medium texture for comfortable use during cleansing of the user's body part, a smooth texture for providing a smooth feel to the user, etc., depending upon the skin characteristics of the user. As exemplarily illustrated in FIG. 30, different cleansing members **103**, for example, the single elongate flexible bristles **113** along with the clusters **105** of flexible bristles **106** are positioned and attached at multiple locations on the wearable unit **3001**. The wearable unit **3001** allows the user to clean accessible parts of the user's body.

[0128] In an embodiment, the wearable unit **3001** comprises a loop element (not shown) for suspending or hanging the wearable unit **3001**, for example, on a hook (not shown) on a support structure **2801**, for example, a wall of a bathroom exemplarily illustrated in FIG. 28, when the wearable unit **3001** is not in use. In an embodiment, the loop element is stitched on the wearable unit **3001** or detachably attached to the wearable unit **3001**.

[0129] FIG. 31 exemplarily illustrates a sectional view of the embodiment of the body cleansing apparatus **3000** shown in FIG. 30, showing an insert member **3101** extending outwardly from the wearable unit **3001** and containing a cleansing agent **3102**, for example, soap. The insert member **3101** is made of, for example, a breathable fabric. The insert member **3101** containing the cleansing agent **3102** is foldable into the chamber **3002** of the wearable unit **3001**. The insert member **3101** is configured for right handed users and left handed users. The user inserts a hand into the chamber **3002** of the wearable unit **3001** and folds the insert member **3101** containing the cleansing agent **3102** into the chamber **3002** of the wearable unit **3001** for cleansing the user's body by release of the cleansing agent **3102** through the wearable unit **3001**. In an embodiment, the wearable unit **3001** is selectively composed of a scrubbing material, for example, a spongy foam material. The cleansing agent **3102** perme-

ates through the scrubbing material of the wearable unit **3001** for cleansing the user's body.

[0130] FIG. 32 exemplarily illustrates a method for cleansing a body part of a user. A body cleansing apparatus **100** or **3000** comprising a base member **101** and cleansing members **103**, for example, a combination of single elongate flexible bristles **113** and clusters **105** of flexible bristles **106** positioned and attached at multiple locations on one or more contoured profiles **102a** and **102b** of the base member **101** as exemplarily illustrated and as disclosed in the detailed description of FIGS. 1-31 is provided **3201**. A cleansing agent **1001** is collected **3202** in the reservoir **110**, exemplarily illustrated in FIGS. 12A-12B, FIG. 13, and FIGS. 15-16, within the cluster **105** of flexible bristles **106** and **113**. The collected cleansing agent **1001** is released **3203** from the reservoir **110** along the flexible bristles **106** and **113**, when the user's body part contacts and applies a pressure on the stems **104** of the cleansing members **103** for cleansing the body part. The flexible bristles **106** and **113** coated with the contained cleansing agent **1001** cleanse the user's body part when the user's body part contacts and applies a pressure on the flexible bristles **106** and **113**.

[0131] The flexibility and firmness of the flexible bristles **106** and **113** are controlled by the length of entasis or the contoured profiles **102a** and **102b** of the base member **101**. The body cleansing apparatus **100** or **3000** is manufactured, for example, by an injection molding process. The thickness of the lower ends **104b** and **113b** of the stems **104** and the single elongate flexible bristles **113** and at the tips **106c**, **106d** and **113a** of the flexible bristles **106** and **113** respectively, is controlled by controlling temperature of the dies and the characteristics of rubber or other flexible materials used in manufacturing the flexible bristles **106** and **113**. To expedite the process of manufacturing the body cleansing apparatus **100** or **3000**, refrigerated dies driven by hydraulics and a programmable controller (not shown) are used, thereby enabling manufacture of at least one body cleansing apparatus **100** or **3000** every three seconds. In an embodiment, a manufacturing apparatus (not shown) is provided for manufacturing the body cleansing apparatus **100** or **3000** disclosed herein.

[0132] The body cleansing apparatus **100** or **3000** is cleaned, for example, using a dishwasher, a washing machine, etc. In an example, the body cleansing apparatus **100** can be detached from the support structure **2801** exemplarily illustrated in FIG. 28, rolled, and then placed in the dishwasher. The body cleansing apparatus **100** or **3000** may also be cleaned using a brush and hot water, while being attached to the support structure **2801**.

[0133] In an embodiment, the body cleansing apparatuses **100** and **3000** exemplarily illustrated in FIG. 1 and FIG. 30 respectively are provided in a cleansing kit. The cleansing kit disclosed herein comprises supplementary elements, for example, a non-slippage mat (not shown) having a matt surface, cleansing agents **1001** and **3102**, etc. The non-slippage mat provides grip to the user during cleansing. The non-slippage mat is positioned directly in front of the wall attached body cleansing apparatus **100** on a surface, for example, a base of a bath tub, where the user stands to prevent slippage during cleansing. The non-slippage mat is made of a slip resistant material and can be adhered to the base of the bath tub. The non-slippage mat prevents slippage of the user's feet during bathing. The user stands on the non-slippage mat with the user's back against the body

cleansing apparatus **100** and performs an upward and downward movement against the flexible bristles **106** and **113** of the body cleansing apparatus **100** that branch outwardly from the base member **101**. In embodiments where the body cleansing apparatus **100** is automated as exemplarily illustrated in FIG. 29 and FIGS. 48-60B, the user can stand still on the non-slipage mat with the user's back against the body cleansing apparatus **100**, while the base member **101** comprising the flexible bristles **106** and **113** automatically moves in an upward direction and a downward direction against the user's back for cleansing the user's back. The cleansing kit is provided with cleansing apparatuses **100** and **3000** of different sizes and colors to suit the physical characteristics and preferences of multiple users.

[0134] Consider an example where a user utilizes the body cleansing apparatus **100** disclosed herein for cleansing the user's rear body part, that is, the user's back. The user attaches the body cleansing apparatus **100** comprising the base member **101** and multiple clusters **105** of flexible bristles **106** and the single elongate flexible bristles **113** to a support structure **2801**, for example, a wall of a bathroom, for example, using hook and loop fasteners **2804** as disclosed in the detailed description of FIG. 28. The rear surface **101d** of the base member **101** detachably attaches to the wall, while the front surface **101c** of the base member **101** with the outwardly extending flexible bristles **106** and **113** is exposed for cleansing the user's back. The user applies a cleansing agent **1001**, for example, soap lather to the flexible bristles **106** and **113** that extend outwardly from the base member **101** of the body cleansing apparatus **100**. The user may also push his/her back against the flexible bristles **106** and **113** to dispense the cleansing agent **1001** from the cavities **107** and **113e** of each cleansing member **103** through the apertures **106e**, **106f** and **113c**, **113d** respectively, exemplarily illustrated in FIG. 23. The user then leans the user's back against the flexible bristles **106** and **113** such that the contoured profiles **102a** and **102b** of the base member **101** that support the flexible bristles **106** and **113** conform to the posterior curvature of the user's back. When the user applies a pressure on the flexible bristles **106**, the cleansing agent **1001** is released from the reservoir **110** defined in each of the flexible bristles **106** onto the flexible bristles **106**. On making contact with the flexible bristles **106** and **113**, the user performs an upward movement and a downward movement of the user's back against the flexible bristles **106** and **113** coated with the released cleansing agent **1001** for cleansing the user's back. The user may also power the motor **2903** and trigger the rolling motion of the body cleansing apparatus **100** as disclosed in the detailed description of FIG. 29.

[0135] The user may also insert a hand into the chamber **3002** of the wearable unit **3001** of the body cleansing apparatus **3000** exemplarily illustrated in FIGS. 30-31, and fold the insert member **3101** containing the cleansing agent **3102** into the chamber **3002** of the wearable unit **3001** for cleansing the user's body by release of the cleansing agent **3102** through the wearable unit **3001**. The body cleansing apparatuses **100** and **3000** allow the user to cleanse rear body parts and other body parts that are difficult to access to avoid, for example, oil build up which leads to problems such as acne, itchiness, etc.

[0136] FIG. 33 exemplarily illustrates a side perspective view of an embodiment of the cleansing member **103** attached to the front surface **101c** of the base member **101**

of the body cleansing apparatus **100** exemplarily illustrated in FIG. 2, showing a retention member **116** attached to one of the flexible bristles **106**, for example, the central flexible bristle **106a** of the cleansing member **103**. As used herein, "retention member" refers to a porous water absorbent body made of a sponge material, for example, cellulose sponge. The retention member **116** is, for example, a generally round shaped sponge member capable of retaining water or other cleansing agents, for example, at the tip **106c** of one of the flexible bristles **106**, for example, the central flexible bristle **106a**. As exemplarily illustrated in FIG. 33, the cleansing member **103** comprises a stem **104** and a cluster **105** of flexible bristles **106**. The stem **104** is attached to and extends outwardly from the front surface **101c** of the base member **101**. The flexible bristles **106** in the cluster **105** curvedly branch outwards from an upper end **104a** of the stem **104**. In an embodiment, the flexible bristles **106** curvedly branching outwards from the upper end **104a** of the stem **104** define a reservoir **110** within each cluster **105**. The base member **101** further comprises a bladder **108** for storing and containing a cleansing agent **1001**, for example, water, a cleansing solution, a cleaning gel, etc. When a body part of the user contacts and applies a pressure on the stem **104** of the cleansing member **103**, the stored cleansing agent **1001** is drawn from the bladder **108** through a cavity **107** within the stem **104**, that is in fluid communication with the bladder **108**, and out through the apertures **106e** and **106f** positioned on a body portion **106i** of, for example, the central flexible bristle **106a** in the cluster **105**.

[0137] The reservoir **110** defined by the flexible bristles **106** in the cluster **105** stores and retains the cleansing agent **1001**, and releases the cleansing agent **1001** along the flexible bristles **106** when the body part contacts and applies a pressure on the stem **104** of the cleansing member **103**. As exemplarily illustrated in FIG. 33, the retention member **116** is detachably attached to a tip **106c** of the central flexible bristle **106a** of the cluster **105**. The retention member **116** retains the cleansing agent **1001** proximal to the tip **106c** of the central flexible bristle **106a** and cleanses the user's body part when the user's body part contacts and applies a pressure on the central flexible bristle **106a**. Therefore, the flexible bristles **106** coated with the cleansing agent **1001**, and the retention member **116** retaining the cleansing agent **1001** proximal to the tip **106c** of the central flexible bristle **106a** allow the user to cleanse the body part when the body part contacts and applies a pressure on the flexible bristles **106**.

[0138] FIG. 34 exemplarily illustrates an embodiment of the method for cleansing a body part of a user. The body cleansing apparatus **100** comprising the base member **101**, multiple cleansing members **103**, and the retention member **116** as exemplarily illustrated in FIG. 33 and as disclosed in the detailed description of FIG. 33, is provided **3401**. The cleansing members **103** are positioned and attached **3402** at multiple locations on one or more of the contoured profiles **102a** and **102b** of the base member **101** exemplarily illustrated in FIGS. 1-2, FIGS. 3A-3B, and FIGS. 4-6. The bladder **108** of the base member **101** stores and contains **3403** the cleansing agent **1001** exemplarily illustrated in FIG. 33. The bladder **108** dispenses **3404** the stored cleansing agent **1001** through the cavity **107** within the stem **104** of each of the cleansing members **103**, and out through the apertures **106e** and **106f** positioned on each of the flexible bristles **106** in the cluster **105** exemplarily illustrated in FIG.

33, when the user's body part contacts and applies a pressure on the stem 104. The retention member 116 retains 3405 the dispensed cleansing agent 1001 proximal to the tip 106c of a flexible bristle, for example, the central flexible bristle 106a exemplarily illustrated in FIG. 33. The reservoir 110 defined within each of the clusters 105 stores and retains 3406 the cleansing agent 1001. The retention member 116 and the reservoir 110 release 3407 the cleansing agent 1001 along the flexible bristles 106 when the user's body part contacts and applies a pressure on the stem 104 for cleansing the body part.

[0139] FIG. 35A exemplarily illustrates a front elevation view of a retention member 117 of an embodiment of the cleansing member 119 exemplarily illustrated in FIG. 35C, showing multiple cavities 118 of the retention member 117, and FIG. 35B exemplarily illustrates a sectional view of the retention member 117 taken along a section M-M' of FIG. 35A, showing multiple cavities 118 of the retention member 117. FIG. 35C exemplarily illustrates a partial sectional view of an embodiment of the body cleansing apparatus 100 detachably attachable to a support structure 2801, showing the cleansing member 119 comprising the retention member 117 and multiple flexible bristles 120 attached to the base member 101. In this embodiment, the cleansing member 119 comprises the retention member 117, for example, made of a sponge material such as a silicone rubber material, and flexible bristles 120 positioned within the retention member 117. The retention member 117 is fixedly attached to the front surface 101c of the base member 101. The thickness of the retention member 117 is, for example, about 1 inch to about 1.25 inches. In an embodiment, the thickness of the retention member 117 is, for example, about 3 inches. The retention member 117 is configured to retain a cleansing agent 1001 exemplarily illustrated in FIG. 33, dispensed on the retention member 117. The retention member 117 comprises multiple cavities 118 for accommodating multiple flexible bristles 120. The flexible bristles 120 are fixedly attached to the front surface 101c of the base member 101 and positioned within the cavities 118 of the retention member 117. In an embodiment, the flexible bristles 120 are of predetermined or configurable dimensions. The flexible bristles 120 and the retention member 117 cleanse a user's body part when the body part contacts and applies a pressure on the flexible bristles 120 and the retention member 117.

[0140] The base member 101 is detachably attachable to the support structure 2801 by one or more fasteners, for example, 2804 exemplarily illustrated in FIG. 35C. The support structure 2801, for example, a bathroom wall has two outer layers comprising a green board dry wall 3501 and a tile surface 3502. In an embodiment, the fasteners are hook and loop fasteners 2804 comprising hook sides 2802a and loop sides 115a. As exemplarily illustrated in FIG. 35C, the loop sides 115a of the hook and loop fasteners 2804 are affixed on the rear surface 101d of the base member 101, while the hook sides 2802a of the hook and loop fasteners 2804 are attached to the support structure 2801 for allowing a detachable attachment of the body cleansing apparatus 100 to the support structure 2801. In an embodiment, the hook sides 2802a and the loop sides 115a of the hook and loop fasteners 2804 are configured on strips 2802 and 115 respectively. The hook and loop fasteners 2804 have a width of, for example, about 2 inches.

[0141] FIG. 36A exemplarily illustrates a disassembled, partial sectional view of an embodiment of the body cleans-

ing apparatus 100 detachably attachable to a support structure 2801, showing a combination of cleansing members 119 and 121 attachable to the base member 101. In this embodiment, the body cleansing apparatus 100 comprises a first cleansing member 119 and a second cleansing member 121. The first cleansing member 119 comprises the retention member 117 with cavities 118 therewithin for receiving the flexible bristles 120 affixed on the front surface 101c of the base member 101. The retention member 117 of the first cleansing member 119 is, for example, of a rectangular shape. The second cleansing member 121 comprises a retention member 122 comprising one or more cavities 123 configured to receive the central flexible bristles 124 of the second cleansing member 121 as disclosed in the detailed description of FIG. 38. The retention member 122 of the second cleansing member 121 is, for example, of a substantially spherical shape.

[0142] FIG. 36B exemplarily illustrates a partial sectional view of an assembled body cleansing apparatus 100 comprising the combination of cleansing members 119 and 121 and detachably attached to a support structure 2801. As exemplarily illustrated in FIG. 36B, the body cleansing apparatus 100 disclosed herein comprises the base member 101 and multiple cleansing members 119 and 121. The base member 101 is attached to the support structure 2801, for example, using hook and loop fasteners 2804. Individual flexible bristles 120 separated at predetermined intervals are attached to the front surface 101c of the base member 101. The individual flexible bristles 120 are single elongate flexible bristles that extend outwardly from the front surface 101c of the base member 101. The cleansing members 121 are positioned and attached at multiple locations on the base member 101. In an embodiment, the cleansing members 121 are positioned between sets of individual flexible bristles 120. As exemplarily illustrated in FIG. 36B, each cleansing member 121 comprises a stem 104, a cluster 105 of flexible bristles 124 and 125, and a retention member 122. The stem 104 is attached to and extends outwardly from the front surface 101c of the base member 101. The cluster 105 of flexible bristles 124 and 125 comprises, for example, the central flexible bristles 124 and radial flexible bristles 125. The radial flexible bristles 125 curvedly branch outwards from the upper end 104a of the stem 104. The retention member 122 is detachably attached to the flexible bristles 124 and 125. The retention member 122 is made of a porous material of a generally spherical shape. The retention member 122 retains a cleansing agent 1001 exemplarily illustrated in FIG. 33, dispensed on the retention member 122 and cleanses the body part when the body part contacts the flexible bristles 124 and 125 with the retention member 122.

[0143] FIG. 37 exemplarily illustrates a top plan view of an embodiment of the cleansing member 121 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 2, showing an arrangement of central flexible bristles 124 and radial flexible bristles 125. The cluster 105 of flexible bristles 124 and 125 exemplarily illustrated in FIG. 37, comprises multiple central flexible bristles 124 extending from the upper end 104a of the stem 104 of the cleansing member 121, and multiple radial flexible bristles 125 surrounding the central flexible bristles 124. As exemplarily illustrated in FIG. 37, the cluster 105 of flexible bristles 124 and 125 comprises eight radial flexible bristles 125 surrounding four central flexible bristles 124. The top plan view shows a generally circular geometry of the arrangement of

the cluster **105** of flexible bristles **124** and **125**. The central flexible bristles **124** are centrally positioned within the radial flexible bristles **125**.

[0144] FIG. 38 exemplarily illustrates a sectional view of an embodiment of the cleansing member **121** of the body cleansing apparatus **100** exemplarily illustrated in FIG. 2, taken along a section N-N' of FIG. 37. In this embodiment, each of the radial flexible bristles **125** curvedly branch outwards from the upper end **104a** of the stem **104** of the cleansing member **121** to define a substantially spherical space **126** above the upper end **104a** of the stem **104**. The spherical space **126** receives the retention member **122** of, for example, a spherical shape, made, for example, of a sponge material. In this embodiment, the retention member **122** comprises one or more cavities **123** for receiving the central flexible bristles **124** when the retention member **122** is inserted into the spherical space **126** defined by the radial flexible bristles **125**.

[0145] In an embodiment, the central flexible bristles **124** are exposed through the cavities **123** of the retention member **122** to scrub the user's body part after the retention member **122** collapses under a substantial increase in pressure from the body part on the retention member **122**. The central flexible bristles **124** are, for example, stiff bristles, attached to and extending outwardly from the upper end **104a** of the stem **104**. In an embodiment, the retention member **122** retains the cleansing agent **1001** exemplarily illustrated in FIG. 33, within the cleansing member **121** and collapses under pressure from the body part to release the cleansing agent **1001** for cleansing the body part.

[0146] The cavities **123** in the retention member **122** are, for example, about $\frac{1}{8}$ inches larger than the diameter of the central flexible bristles **124**. In an embodiment, the central flexible bristles **124** are stiffer and thicker in diameter and shorter than the radial flexible bristles **125** by, for example, about $\frac{1}{8}$ inches. The radial flexible bristles **125** are, for example, longer compared to the central flexible bristles **124**. The retention member **122** absorbs and retains the cleansing agent **1001** exemplarily illustrated in FIG. 10A, FIG. 10C, and FIG. 33, for example, soap mixed with water. When a user applies a pressure on the retention member **122** with a body part, the body part first contacts the retention member **122**. When the pressure on the retention member **122** is increased, the retention member **122** collapses and dispenses the cleansing agent **1001** on the user's body part and the cluster **105** of flexible bristles **124** and **125** makes contact with the user's body part to cleanse the user's body part. When the user applies more pressure on the retention member **122**, the retention member **122** collapses further and releases more cleansing agent **1001** on the user's body part, and the central flexible bristles **124** of the cleansing members **121** make contact with the user's body part to scrub the body part, for example, for hand scrubbing.

[0147] FIG. 39A exemplarily illustrates a front elevation view of an embodiment of the body cleansing apparatus **100**, showing a combination of different cleansing members **119** and **121** attached to the base member **101**. FIG. 39B exemplarily illustrates a disassembled sectional view of the embodiment of the body cleansing apparatus **100** taken along a section O-O' of FIG. 39A. As exemplarily illustrated in FIG. 39A, the cleansing members **121** are centrally positioned in a mid-section **101e** of the base member **101**, and the cleansing member **119** is positioned on opposing sections **101f** and **101g** adjacent to the mid-section **101e** of

the base member **101**. The pattern of the arrangement of the cleansing members **121** is symmetrical to compensate for any empty space above the base member **101**.

[0148] The height of the body cleansing apparatus **100** is, for example, about 16 inches to about 28 inches, and the width of the body cleansing apparatus **100** is, for example, about 22 inches. A straight section **101h** of the body cleansing apparatus **100** is, for example, about 21 inches in height and a sloped section **101i** below the straight section **101h** is, for example, about 7 inches in height. As exemplarily illustrated in the disassembled sectional view of the body cleansing apparatus **100** in FIG. 39B, the base member **101** is configured to be detachably attached to the support structure **2801** using, for example, hook and loop fasteners **2804**. The flexible bristles **120** attached to the front surface **101c** of the base member **101** are configured to be inserted into the cavities **118** of the retention member **117**, while the cleansing members **121** are received and centrally positioned within the retention member **117**. The mid-section **101e** of the base member **101** is, for example, about 1.25 inches in thickness and 2 inches wide.

[0149] FIG. 40 exemplarily illustrates a front elevation view of an embodiment of the body cleansing apparatus **100**, showing a combination of different cleansing members **4001**, **4002**, and **121** attached to the base member **101**. In this embodiment, the body cleansing apparatus **100** comprises the base member **101** and cleansing members **4001**, **4002**, and **121** positioned and attached at multiple locations on the base member **101**. The cleansing members **121** of the type exemplarily illustrated in FIGS. 36A-38, are positioned and attached to the mid-section **101e** of the front surface **101c** of the base member **101**. Each of the cleansing members **121** comprises the retention member **122**, for example, made of a sponge material, and flexible bristles **124** and **125** as disclosed in the detailed description of FIGS. 36A-38. Strips of cleansing members **4001** and **4002** are detachably attached to opposing sections **101f** and **101g** of the front surface **101c** of the base member **101** using one or more fasteners **4003**, for example, hook and loop fasteners such as Velcro® of Velcro Industries B. V. LLC, Netherlands. As exemplarily illustrated in FIG. 40, the strips of cleansing members **4001** and **4002** are detachably attached to the opposing sections **101f** and **101g** of the base member **101** using four fasteners **4003** attached to opposing sides **4001a**, **4001b**, **4001c**, **4001d** and **4002a**, **4002b**, **4002c**, **4002d** of each of the strips of cleansing members **4001** and **4002** respectively. In an embodiment, the strips of cleansing members **4001** and **4002** are fixedly attached to the front surface **101c** of the base member **101**, for example, using an adhesive material. In an embodiment, the cleansing members **4001** and **4002** comprise retention members **117**, for example, made of a sponge material.

[0150] In an embodiment, the retention members **117** of the cleansing members **4001** and **4002** comprise multiple cavities **118** for accommodating multiple flexible bristles **120**. The flexible bristles **120** of configurable dimensions are fixedly attached to and positioned within the cavities **118** of the retention members **117**. In an embodiment, the flexible bristles **120** are fixedly attached to and extend from the opposing sections **101f** and **101g** of the front surface **101c** of the base member **101**. The flexible bristles **120** are inserted into the cavities **118** of the retention members **117** of the cleansing members **4001** and **4002**. The retention members **117** and **122** and the flexible bristles **120** and **124**, **125**

respectively, retain a cleansing agent dispensed on them. The retention members 117 and 122 of the cleansing members 4001, 4002 and 121 respectively, release the cleansing agent along the flexible bristles 120 and 124, 125 respectively exemplarily illustrated in FIG. 38, when a user's body part, for example, the user's back, contacts and applies a pressure on the retention members 117 and 122 for cleansing the user's body part.

[0151] FIG. 41 exemplarily illustrates a disassembled view of an embodiment of the body cleansing apparatus 100, showing a position adjustment device 4100. In an embodiment, the body cleansing apparatus 100 disclosed herein further comprises a position adjustment device 4100 detachably attached to the rear surface 101d of the base member 101 using fasteners 4101 and 4102, for example, snap fasteners, positioned on the rear surface 101d of the base member 101 and a front surface 4103a of the position adjustment device 4100 respectively. The position adjustment device 4100 is configured to adjust a position of the body cleansing apparatus 100 on a support structure 2801, for example, a bathroom wall, to allow users of different heights to use the body cleansing apparatus 100 without manually removing and fixing the body cleansing apparatus 100 to the support structure 2801 to suit each user's height each time. Multiple fasteners 4101 and 4102, for example, snap fasteners are positioned on the rear surface 101d of the base member 101 and the front surface 4103a of the position adjustment device 4100 respectively, for detachably attaching the base member 101 with the attached cleansing members, for example, 103, or 119, or 121 exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, to the position adjustment device 4100.

[0152] As exemplarily illustrated in FIG. 41, the position adjustment device 4100 comprises a guide slide plate 4103, a base plate 4106, and a locking lever 4107. A front surface 4103a of the guide slide plate 4103 is detachably attached to the rear surface 101d of the base member 101 using the fasteners 4101 and 4102. The guide slide plate 4103 comprises multiple elongate guide projections 4104a, 4104b, 4104c, and 4104d extending from a rear surface 4103b of the guide slide plate 4103. The rear surface 4103b of the guide slide plate 4103 opposes the front surface 4103a of the guide slide plate 4103. The base plate 4106 comprises multiple guideways 4105a, 4105b, 4105c, and 4105d configured on the front surface 4106a of the base plate 4106. The elongate guide projections 4104a, 4104b, 4104c, and 4104d of the guide slide plate 4103 are configured to slide within the guideways 4105a, 4105b, 4105c, and 4105d of the base plate 4106 respectively. The thickness of the position adjustment device 4100 is, for example, about 1.75 inches.

[0153] One or more fasteners, for example, hook and loop fasteners 4108 such as Velcro® of Velcro Industries B. V. LLC, Netherlands, are positioned on the rear surface 4106b of the base plate 4106 and the front surface 2801a of the support structure 2801. The base plate 4106 is configured to be detachably attached to the support structure 2801 using the hook and loop fasteners 4108. The hook and loop fasteners 4108 comprise hook sides 2802a and loop sides 4108a. The hook sides 2802a or the loop sides 4108a of the hook and loop fasteners 4108 are affixed on the rear surface 4106b of the base plate 4106, while an opposing one of the hook sides 2802a or the loop sides 4108a of the hook and loop fasteners 4108 are affixed on the front surface 2801a of

the support structure 2801 for allowing the detachable attachment of the base plate 4106 to the support structure 2801. For example, if the loop sides 4108a of the hook and loop fasteners 4108 are affixed on the rear surface 4106b of the base plate 4106, the hook sides 2802a of the hook and loop fasteners 4108 are attached to the front surface 2801a of the support structure 2801 and vice versa as exemplarily illustrated in FIG. 41. The hook and loop fasteners 4108 are affixed on the rear surface 4106b of the base plate 4106 and the front surface 2801a of the support structure 2801, for example, by sewing, using adhesives, etc. A user may apply a pressure and push the rear surface 4106b of the base plate 4106 of the position adjustment device 4100 having, for example, the loop sides 4108a of the hook and loop fasteners 4108 against the hook sides 2802a of the hook and loop fasteners 4108 on the front surface 2801a of the support structure 2801 to attach the position adjustment device 4100 to the support structure 2801. The locking lever 4107 of the position adjustment device 4100 is operably connected, for example, to the elongate guide projection 4104c of the guide slide plate 4103.

[0154] FIG. 42 exemplarily illustrates a rear elevation view of an embodiment of the base member 101 of the body cleansing apparatus 100 exemplarily illustrated in FIG. 41, showing multiple fasteners 4101, for example, snap fasteners attached to the rear surface 101d of the base member 101 to facilitate attachment of the base member 101 to the position adjustment device 4100 shown in FIG. 41. The fasteners 4101 attach the base member 101 to the position adjustment device 4100 by interlocking with multiple second fasteners 4102 positioned on the front surface 4103a of the guide slide plate 4103 as exemplarily illustrated in FIG. 41 and FIG. 43.

[0155] FIG. 43 exemplarily illustrates an assembled left side elevation view of an embodiment of the body cleansing apparatus 100, showing the position adjustment device 4100. As exemplarily illustrated in FIG. 43, the base member 101 of the body cleansing apparatus 100 with the attached cleansing members, for example, 103, or 119, or 121 exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, is attached to the position adjustment device 4100 via the fasteners 4101 and 4102, for example, snap fasteners. The fasteners 4102 positioned on the front surface 4103a of the guide slide plate 4103 of the position adjustment device 4100 are engageably connected to the fasteners 4101 positioned on the rear surface 101d of the base member 101. The base plate 4106 of the position adjustment device 4100 is detachably attached to the support structure 2801 using one or more fasteners, for example, the hook and loop fasteners 4108. The locking lever 4107 operably connected, for example, to the elongate guide projection 4104c of the guide slide plate 4103 exemplarily illustrated in FIG. 41, controls movement of the elongate guide projections 4104a, 4104b, 4104c, and 4104d within the guideways 4105a, 4105b, 4105c, and 4105d of the base plate 4106 respectively, exemplarily illustrated in FIG. 41.

[0156] FIG. 44 exemplarily illustrates an assembled front perspective view of an embodiment of the body cleansing apparatus 100, showing adjustable positioning of the body cleansing apparatus 100 using the position adjustment device 4100. The position adjustment device 4100 is detachably attached to a support structure 2801, for example, a wall as exemplarily illustrated in FIGS. 43-44. The elongate

guide projections **4104a**, **4104b**, **4104c**, and **4104d** of the guide slide plate **4103** of the position adjustment device **4100** slide within the guideways **4105a**, **4105b**, **4105c**, and **4105d** of the base plate **4106** respectively, to position the base member **101** of the body cleansing apparatus **100** with the attached cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, at a desired position in accordance with a user's height. As exemplarily illustrated in FIG. 44, the elongate guide projections **4104a**, **4104b**, **4104c**, and **4104d** are elongate T-shaped members that slide within elongate T-shaped guideways **4105a**, **4105b**, **4105c**, and **4105d** respectively. The locking lever **4107** operably connected, for example, to the elongate guide projection **4104c** of the guide slide plate **4103**, when engaged, comes in contact with the elongate guide projection **4104c** of the guide slide plate **4103** and locks the guide slide plate **4103** in position, thereby preventing the guide slide plate **4103** from moving. When the locking lever **4107** is disengaged, the elongate guide projection **4104c** is not in contact with the locking lever **4107** and is therefore free to slide in an upward direction or a downward direction through the guideway **4105c** of the base plate **4106** along with the other elongate guide projections **4104a**, **4104b**, and **4104d** through the guideways **4105a**, **4105b**, and **4105d** of the base plate **4106** respectively. If a user finds the body cleansing apparatus **100** at a height that is either too high or too low for the user to optimally use, then the user can disengage the locking lever **4107** and slide the body cleansing apparatus **100** in an upward direction or a downward direction to an appropriate position for using the body cleansing apparatus **100**. The user may then engage the locking lever **4107** to secure the body cleansing apparatus **100** firmly in the appropriate position and restrict movement.

[0157] FIG. 45A exemplarily illustrates a rear elevation view of an embodiment of the base member **101** configured as a membrane. In this embodiment, the base member **101** is configured as a membrane with attached cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40. The thickness of the membrane is, for example, about 0.375 inches to about 0.625 inches. The membrane comprises drainage openings **4501** for draining fluids, for example, water, the cleansing agent **1001** exemplarily illustrated in FIG. 10A, FIG. 10C, FIG. 11, FIG. 12B, FIG. 13, and FIGS. 15-16, passing through the cleansing members, for example, **103**, or **119**, or **121**, when a user is bathing. In this embodiment, lesser amounts of rubber silicone are used in the base member **101**, thereby enabling the body cleansing apparatus **100** to be less expensive.

[0158] FIG. 45B exemplarily illustrates a left side elevation view of the embodiment of the base member **101** configured as a membrane. In this embodiment, the cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, are attached to the embodiment of the base member **101** configured as a membrane as exemplarily illustrated in FIGS. 45A-45B.

[0159] FIG. 46A exemplarily illustrates a rear elevation view of the embodiment of the base member **101** configured as a membrane shown in FIG. 45A, showing strips **115** of fasteners, for example, loop sides **115a** of the hook and loop

fasteners **2804** exemplarily illustrated in FIG. 28, attached to the rear surface **101d** of the base member **101**. The drainage openings **4501** in the base member **101** configured as a membrane are exemplarily illustrated in FIG. 46A.

[0160] FIG. 46B exemplarily illustrates a left side elevation view of the embodiment of the base member **101** configured as a membrane shown in FIG. 46A, showing detachable attachment of the base member **101** to a support structure **2801**, for example, a wall using the fasteners **2804**. A user may apply a pressure and push the rear surface **101d** of the base member **101** having, for example, the loop sides **115a** of the hook and loop fasteners **2804** against the hook sides **2802a** of the hook and loop fasteners **2804** on the front surface **2801a** of the support structure **2801** to attach the base member **101** to the support structure **2801**. A user cleanses his/her back using the cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, attached to the front surface **101c** of the base member **101**.

[0161] FIG. 47 exemplarily illustrates an embodiment of the method for cleansing a body part of a user. The body cleansing apparatus **100** comprising the base member **101** and the cleansing members **119** and **121** exemplarily illustrated in FIG. 35C and FIG. 36B, is provided **4701**. The retention members **117** and/or **122** exemplarily illustrated in FIG. 35C and FIG. 36B, retain **4702** a cleansing agent **1001** exemplarily illustrated in FIG. 10A, FIG. 10C, FIG. 11, FIG. 12B, FIG. 13, and FIGS. 15-16, dispensed on the retention members **117** and/or **122**. The retention members **117** and/or **122** release **4703** the cleansing agent **1001** along the flexible bristles **120** and/or **124** and **125** of the body cleansing apparatus **100** exemplarily illustrated in FIG. 35C and FIG. 36B, when a user's body part contacts and applies a pressure on the cleansing members **119** and/or **121** for cleansing the user's body part.

[0162] FIGS. 48-49 exemplarily illustrate a rear exploded view and a left side exploded view respectively, of an embodiment of the body cleansing apparatus **100**, hereafter referred to as a "motorized body cleansing apparatus" and referenced by the numeral **100**. The motorized body cleansing apparatus **100** is, for example, about 16 inches long and 22 inches wide. The motorized body cleansing apparatus **100** disclosed herein comprises a base plate **4106**, multiple rollers **4815** exemplarily illustrated in FIGS. 50-51, a guide slide plate **4103**, a split cover plate **4801**, a motion transmission assembly **4820** exemplarily illustrated in FIGS. 52-54, and the base member **101**. The base member **101** is detachably attached to the front surface **4103a** of the guide slide plate **4103** by fasteners **4101** and **4102**, for example, snap fasteners, positioned on the rear surface **101d** of the base member **101** and the front surface **4103a** of the guide slide plate **4103** respectively. The motorized body cleansing apparatus **100** allows automated movement of the base member **101** with the attached cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, by the motion transmission assembly **4820** as disclosed in the detailed description of FIGS. 52-54. The motorized body cleansing apparatus **100** is detachably attached to a support structure **2801**, for example, a wall.

[0163] The base plate **4106** of the motorized body cleansing apparatus **100** comprises a front surface **4106a** and a rear

surface **4106b**. The base plate **4106** is detachably attached to the support structure **2801** using fasteners, for example, hook and loop fasteners **4108** such as Velcro® of Velcro Industries B. V. LLC, Netherlands, positioned on the rear surface **4106b** of the base plate **4106** and the front surface **2801a** of the support structure **2801** as disclosed in the detailed description of FIGS. 59A-59B. The base plate **4106** is made of, for example, plastic, the Darlyn® coated fabric material of Chemical Fabrics Corporation, Vermont, etc. The base plate **4106** comprises guideways **4105a** and **4105b** positioned on the front surface **4106a** of the base plate **4106**. The guideways **4105a** and **4105b** are, for example, of an elongate rectangular shape. The base plate **4106** further comprises a cavity **4106c** configured between the guideways **4105a** and **4105b** on the front surface **4106a** of the base plate **4106**. The cavity **4106c** of the base plate **4106** is, for example, a rectangular space configured in the base plate **4106**. The cavity **4106c** of the base plate **4106** accommodates the motion transmission assembly **4820** comprising a motor **4807**, a worm gear **4809**, transmission members, for example, **4805**, **4806**, **4812**, **4813**, etc., exemplarily illustrated in FIGS. 52-54 and as disclosed in the detailed description of FIGS. 52-54. The motor **4807**, the motor shaft **4808**, the worm gear **4809**, and the transmissions members **4805** and **4806** of the motion transmission assembly **4820** are exemplarily illustrated in FIG. 49. The guideways **4105a** and **4105b** of the base plate **4106** accommodate the rollers **4815** as disclosed in the detailed description of FIGS. 50-51. The thickness of the base plate **4106** is, for example, about 1.5 inches to about 2 inches. The guideways **4105a** and **4105b** of the base plate **4106** are sufficiently wide, for example, about 1 inch to about 1.44 inches to accommodate the rollers **4815**.

[0164] The transmission member **4805** of the motion transmission assembly **4820** is fixedly attached to the rear surface **4103b** of the guide slide plate **4103** using fasteners **4804**, for example, screws. The transmission member **4805** is, for example, an inverted gear block of a rectangular shape. The guide slide plate **4103** of the motorized body cleansing apparatus **100** is positioned at the front surface **4106a** of the base plate **4106**. The thickness of the guide slide plate **4103** is, for example, about 0.2 inches to about 0.3 inches. The guide slide plate **4103** comprises multiple elongate guide projections **4104a** and **4104b** extending from the rear surface **4103b** of the guide slide plate **4103**. The rear surface **4103b** of the guide slide plate **4103** opposes the front surface **4103a** of the guide slide plate **4103**. The elongate guide projections **4104a** and **4104b** of the guide slide plate **4103** are configured to slide on the rollers **4815** at the front surface **4106a** of the base plate **4106** as disclosed in the detailed description of FIGS. 50-51. The width of the elongate guide projections **4104a** and **4104b** of the guide slide plate **4103** is, for example, about 1.4 inches to about 1.5 inches.

[0165] The split cover plate **4801** is positioned between the base plate **4106** and the guide slide plate **4103** as exemplarily illustrated in FIGS. 48-49. The thickness of the split cover plate **4801** is, for example, about 0.2 inches to about 0.3 inches. The split cover plate **4801** comprises a securing element **4802** and a cap element **4803**. The securing element **4802** of the split cover plate **4801** is fixedly attached to a body section **4106d** of the base plate **4106** using fasteners **4810**, for example, screws exemplarily illustrated in FIG. 49. The securing element **4802** comprises vertical

slots **4802a** and **4802b** exemplarily illustrated in FIG. 48. The vertical slots **4802a** and **4802b** receive and accommodate the elongate guide projections **4104a** and **4104b** of the guide slide plate **4103**. The securing element **4802** further comprises an opening **4802c**, for example, of a rectangular shape, positioned between the vertical slots **4802a** and **4802b** as exemplarily illustrated in FIG. 48. The opening **4802c** in the securing element **4802** allows the transmission member **4805** of the motion transmission assembly **4820** that is fixedly attached to the rear surface **4103b** of the guide slide plate **4103** to pass through the securing element **4802** and be operably coupled to the transmission member **4806** exemplarily illustrated in FIG. 49. The cap element **4803** of the split cover plate **4801** is fixedly attached to an upper section **4106e** of the base plate **4106** using a fastener **4811**, for example, a screw exemplarily illustrated in FIG. 49. The cap element **4803** is made of, for example, plastic, the Darlyn® coated fabric material of Chemical Fabrics Corporation, Vermont, etc. The cap element **4803** secures the guide slide plate **4103** to the base plate **4106** to preclude the guide slide plate **4103** from sliding out of the base plate **4106**. In an embodiment, other fasteners, for example, hook and loop fasteners, strong suction cup fasteners, strong glue, etc., are used for fixing the securing element **4802** and the cap element **4803** of the split cover plate **4801** to the front surface **4106a** of the base plate **4106**. The split cover plate **4801** precludes the guide slide plate **4103** from disengaging from the base plate **4106** of the motorized body cleansing apparatus **100**.

[0166] The base member **101** of the motorized body cleansing apparatus **100** is detachably attached to the front surface **4103a** of the guide slide plate **4103** by engagement of the fasteners **4101** positioned on the rear surface **101d** of the base member **101** with the fasteners **4102** positioned on the front surface **4103a** of the guide slide plate **4103** as disclosed in the detailed description of the FIG. 41. The thickness of the base member **101** is, for example, about 1.5 inches to about 1.7 inches. The base member **101** is configured with one or more contoured profiles **102a** and **102b** exemplarily illustrated in FIG. 1, to conform to a user's body part. The base member **101** further comprises one or more cleansing members, for example, **103**, or **119**, or **121** exemplarily illustrated in FIGS. 1-2, FIG. 4-6, FIG. 17, FIGS. 27-28, FIG. 35C, FIG. 36B, FIG. 39A, and FIG. 40, attached to the front surface **101c** of the base member **101**. In an embodiment, the base member **101** comprises a sponge material, for example, cellulose sponge. The different embodiments of the cleansing members, for example, **103**, or **119**, or **121** are disclosed in the detailed descriptions of FIGS. 1-25, FIG. 33, and FIGS. 35A-40. The base member **101** with the cleansing members, for example, **103**, or **119**, or **121** are configured with a smooth texture or a scrub type texture. The cleansing members, for example, **103**, or **119**, or **121** clean the user's body part when the body part contacts and applies a pressure on the cleansing members, for example, **103**, or **119**, or **121**, while the motion transmission assembly **4820** moves the guide slide plate **4103** with the detachably attached base member **101** in an upward direction and a downward direction.

[0167] FIGS. 50-51 exemplarily illustrate a front isometric view and a front elevation, partial sectional view respectively, of the base plate **4106** of the motorized body cleansing apparatus **100** shown in FIG. 48. As exemplarily illustrated in FIGS. 50-51, the guideways **4105a** and **4105b** are

shaped in the base plate **4106** for accommodating the rollers **4815**. The guideways **4105a** and **4105b** of the base plate **4106** comprise multiple grooves **4105c** spaced at predefined intervals, for example, about 2.5 inches apart from each other. The width of the guideways **4105a** and **4105b** together with the grooves **4105c** is, for example, about 1.6 inches to about 1.7 inches. The grooves **4105c** are configured to accommodate shafts **4814** of the rollers **4815**. The shafts **4814** of the rollers **4815** are, for example, made of aluminum, stainless steel, etc. In an embodiment, the rollers **4815** are coated with a rubber material. The rollers **4815** are positioned in the guideways **4105a** and **4105b** of the base plate **4106** as follows. Each roller **4815** is mounted on its shaft **4814**. The shafts **4814** along with the rollers **4815** are inserted into the grooves **4105c** of the guideways **4105a** and **4105b** as exemplarily illustrated in FIGS. 50-51. The guide slide plate **4103** of the motorized body cleansing apparatus **100** exemplarily illustrated in FIG. 48, is positioned on the rollers **4815** at the front surface **4106a** of the base plate **4106**. The rollers **4815** are configured to roll within the guideways **4105a** and **4105b** of the base plate **4106**. When the rollers **4815** roll during movement of the guide slide plate **4103** in an upward direction and a downward direction caused by the motion transmission assembly **4820** exemplarily illustrated in FIGS. 52-54, the shafts **4814** of the rollers **4815** roll in the grooves **4105c** of the guideways **4105a** and **4105b**. The grooves **4105c** are configured to secure the shafts **4814** with the rollers **4815** in the guideways **4105a** and **4105b** of the base plate **4106** during the movement of the guide slide plate **4103**.

[0168] The motor **4807**, the worm gear **4809**, transmission members, for example, **4805**, **4806**, **4812**, **4813**, etc., exemplarily illustrated in FIGS. 52-54, of the motion transmission assembly **4820** are positioned in the cavity **4106c** of the base plate **4106** as exemplarily illustrated in FIGS. 50-51, and are operably coupled to each other to facilitate movement of the guide slide plate **4103** in the upward direction and the downward direction. The motor **4807** is, for example, a high torque 180 revolutions per minute (rpm) direct current (DC) motor. In an embodiment, the motor **4807** is fixedly attached to the cavity **4106c** of the base plate **4106**, for example, using a C shaped bracket **4818**. A bearing **4825** is mounted on the motor shaft **4808** and protects the motor **4807** from substantially high loads generated during the operation of the motor **4807**. In an embodiment, the bearing **4825** is securely fixed to the motor shaft **4808**, for example, using a C shaped bracket **4819**. The motorized body cleansing apparatus **100** further comprises switches **4817** positioned on the base plate **4106**. The switches **4817** are in electrical communication with a power source **4816** and the motor **4807** of the motion transmission assembly **4820**. The switches **4817** are used for activating the motor **4807** to move the guide slide plate **4103** in the upward direction and the downward direction. In an embodiment, the switches **4817** are encased in a rubber material for waterproofing the switches **4817**. The switches **4817** are configured to operate the motor **4807** in different modes, for example, on, off, a speed control mode for increasing or decreasing speed of the motor **4807**, an audio mode for hands free adjustment, etc. In an embodiment, the switches **4817** are positioned at the bottom of the motorized body cleansing apparatus **100**. The power source **4816** comprising, for example, dual 9 volt (V) batteries, is integrated within the base plate **4106** as exemplarily illustrated in dashed lines in FIG. 50. A cap **4106f** is

provided at the bottom of the base plate **4106** as exemplarily illustrated in FIG. 51, to cover and protect the power source **4816** from moisture.

[0169] FIG. 52 exemplarily illustrates a front, partial exploded view of the motion transmission assembly **4820** of the motorized body cleansing apparatus **100**. The motion transmission assembly **4820** is positioned in the cavity **4106c** of the base plate **4106** as exemplarily illustrated in FIGS. 50-51, and operably coupled to the guide slide plate **4103** as exemplarily illustrated in FIGS. 48-49. The motion transmission assembly **4820** moves the guide slide plate **4103** in an upward direction and a downward direction over the rollers **4815** exemplarily illustrated in FIGS. 50-51. As exemplarily illustrated in FIG. 52, the motion transmission assembly **4820** comprises the motor **4807**, the worm gear **4809**, a first transmission member **4812**, a second transmission member **4813**, a third transmission member **4806**, and a fourth transmission member **4805**. The motor **4807** of the motion transmission assembly **4820** is fixedly attached in the cavity **4106c** of the base plate **4106** as exemplarily illustrated in FIGS. 50-51. The C shaped bracket **4818** and fasteners **4821**, for example, screws, fixedly attach the motor **4807** to the cavity **4106c** of the base plate **4106**. The bearing **4825** is mounted on the motor shaft **4808** for protecting the motor **4807** from substantially high loads generated during the operation of the motor **4807**. The C shaped bracket **4819** and fasteners **4822**, for example, screws, securely fix the bearing **4825** to the motor shaft **4808**.

[0170] The worm gear **4809** of the motion transmission assembly **4820** is mounted on the motor shaft **4808**. A first shaft **4823** is fixedly attached in and extends outwardly from the cavity **4106c** of the base plate **4106**. A second shaft **4824** is rotatably attached in and extends outwardly from the cavity **4106c** of the base plate **4106**, for example, via bearings. In an embodiment, the first shaft **4823** and the second shaft **4824** are provided with bushes (not shown) to prevent the first shaft **4823** and the second shaft **4824** from wear and tear. The first transmission member **4812**, for example, a pinion gear, is mounted on the first shaft **4823** in the cavity **4106c** of the base plate **4106**. The first transmission member **4812** operably engages with the worm gear **4809**. The second transmission member **4813** is mounted on the second shaft **4824** in the cavity **4106c** of the base plate **4106**. The second transmission member **4813** operably engages with the first transmission member **4812**. The third transmission member **4806** is positioned in front of the second transmission member **4813** and is mounted on the second shaft **4824** extending outwardly from the cavity **4106c** of the base plate **4106**. In an embodiment, the second transmission member **4813** and the third transmission member **4806** constitute a compound gear mounted on the common second shaft **4824**.

[0171] The third transmission member **4806** engages with the fourth transmission member **4805** that is fixedly attached to the rear surface **4103b** of the guide slide plate **4103** using the fasteners **4804** exemplarily illustrated in FIGS. 48-49. The fourth transmission member **4805** is configured, for example, as a rectangular inverted gear block. The width of the fourth transmission member **4805** is, for example, about 3.4 inches to about 3.6 inches. The thickness of the fourth transmission member **4805** is, for example, about 0.15 inch to about 0.85 inches. The fourth transmission member **4805** comprises gear teeth **4805c** and **4805d** defined on a right

inner side **4805a** and a left inner side **4805b** of the fourth transmission member **4805** respectively.

[0172] FIGS. 53-54 exemplarily illustrate front isometric views of the motion transmission assembly **4820**, showing alignment and engagement of the transmission members, for example, **4805**, **4806**, **4812**, and **4813** of the motion transmission assembly **4820**. The third transmission member **4806** is aligned with the fourth transmission member **4805** of the motion transmission assembly **4820** as exemplarily illustrated in FIG. 53. Gear teeth **4806a** of the third transmission member **4806** engage with the gear teeth **4805c** on the right inner side **4805a** of the fourth transmission member **4805** as exemplarily illustrated in FIG. 54, and with the gear teeth **4805d** on the left inner side **4805b** of the fourth transmission member **4805** alternately to move the guide slide plate **4103** with the base member **101** exemplarily illustrated in FIGS. 48-49, in the upward direction and the downward direction. The third transmission member **4806** is held within the fourth transmission member **4805** to allow the third transmission member **4806** to pass alternately from the right inner side **4805a** of the fourth transmission member **4805** to the left inner side **4805b** of the fourth transmission member **4805**, thereby moving the fourth transmission member **4805** in an upward direction or a downward direction according to the side **4805a** or **4805b** to which the gear teeth **4806a** of the third transmission member **4806** engages. The fourth transmission member **4805** along with the guide slide plate **4103** is configured to move in the upward direction and the downward direction by transmission of motion from the motor **4807** to the fourth transmission member **4805** via the first transmission member **4812**, the second transmission member **4813**, and the third transmission member **4806**.

[0173] When the motor **4807** is activated by the switches **4817** exemplarily illustrated in FIGS. 50-51, the motor shaft **4808** rotates and transmits a torque to the first transmission member **4812** through the worm gear **4809** mounted on the motor shaft **4808**. The first transmission member **4812** starts rotating as a result of the torque transmitted by the motor **4807** through the worm gear **4809**. The first transmission member **4812** operably engages with the second transmission member **4813**, thereby transmitting the torque received from the motor **4807** through the worm gear **4809** to the second transmission member **4813**. The second transmission member **4813** simultaneously transmits the received torque to the second shaft **4824** and the third transmission member **4806** resulting in the rotation of the second shaft **4824** and the third transmission member **4806**. The third transmission member **4806** operably engages with the fourth transmission member **4805**, thereby transmitting the received torque from the second transmission member **4813**, to the fourth transmission member **4805** that is fixedly attached to the rear surface **4103b** of the guide slide plate **4103**. The torque transmitted to the fourth transmission member **4805** moves the guide slide plate **4103** in the upward direction and the downward direction, since the fourth transmission member **4805** is fixedly attached to the rear surface **4103b** of the guide slide plate **4103**.

[0174] FIG. 55A exemplarily illustrates a front elevation view of the split cover plate **4801** of the motorized body cleansing apparatus **100** shown in FIG. 48, when the guide slide plate **4103** of the motorized body cleansing apparatus **100** exemplarily illustrated in FIGS. 48-49, positioned in front of the split cover plate **4801** is in an upward position.

The continuous rotation of the third transmission member **4806** of the motion transmission assembly **4820** exemplarily illustrated in FIGS. 52-54, results in a reciprocating motion of the fourth transmission member **4805** in an upward direction and a downward direction as disclosed in the detailed description of the FIGS. 53-54. The movement of the fourth transmission member **4805** causes the movement of the guide slide plate **4103** in the upward direction and the downward direction. When the guide slide plate **4103** is in the upward position as exemplarily illustrated in FIG. 55A, the gear teeth **4806a** of the third transmission member **4806** engage with the gear teeth **4805c** on the right inner side **4805a** of the fourth transmission member **4805**. When the third transmission member **4806** rotates, for example, in a clockwise direction as exemplarily illustrated in FIG. 55A, the third transmission member **4806** applies a torque on the gear teeth **4805c** on the right inner side **4805a** of the fourth transmission member **4805**, resulting in the movement of the fourth transmission member **4805** in the downward direction, thereby moving the guide slide plate **4103** in the downward direction.

[0175] FIG. 55B exemplarily illustrates a front elevation view of the split cover plate **4801** when the guide slide plate **4103** exemplarily illustrated in FIGS. 48-49, positioned in front of the split cover plate **4801** is in a downward position. When the guide slide plate **4103** is in the downward position as exemplarily illustrated in FIG. 55B, the gear teeth **4806a** of the third transmission member **4806** engages with the gear teeth **4805d** on the left inner side **4805b** of the fourth transmission member **4805**. When the third transmission member **4806** rotates, for example, in the clockwise direction as exemplarily illustrate in FIG. 55B, the third transmission member **4806** applies a torque on the gear teeth **4805d** on the left inner side **4805b** of the fourth transmission member **4805**, resulting in the movement of the fourth transmission member **4805** in the upward direction, thereby moving the guide slide plate **4103** in the upward direction.

[0176] FIG. 56 exemplarily illustrates a front perspective, partial dissembled view, showing positioning of the elongate guide projections **4104a** and **4104b** of the guide slide plate **4103** in the vertical slots **4802a** and **4802b** of the securing element **4802** of the split cover plate **4801**. After the motion transmission assembly **4820** is fixed in the cavity **4106c** of the base plate **4106**, the securing element **4802** of the split cover plate **4801** is fixedly attached to the base plate **4106**. The elongate guide projections **4104a** and **4104b** of the guide slide plate **4103** are inserted into the vertical slots **4802a** and **4802b** of the securing element **4802**. The cap element **4803** of the split cover plate **4801** is fixed to the base plate **4106** after positioning the guide slide plate **4103** in the vertical slots **4802a** and **4802b** of the securing element **4802** to preclude sliding of the guide slide plate **4103** from the base plate **4106**. The elongate guide projections **4104a** and **4104b** of the guide slide plate **4103** slide on the rollers **4815** positioned in the guideways **4105a** and **4105b** of the base plate **4106** exemplarily illustrated in FIGS. 50-51.

[0177] FIG. 57 exemplarily illustrates front isometric view of the guide slide plate **4103** secured to the base plate **4106** via the split cover plate **4801**. The front surface **4103a** of the guide slide plate **4103** is provided with the fasteners **4102** configured to engage with the fasteners **4101** provided on the rear surface **101d** of the base member **101** exemplarily illustrated in FIG. 48.

[0178] FIG. 58 exemplarily illustrates a front isometric view of the motorized body cleansing apparatus 100, showing the base member 101 attached to the guide slide plate 4103. The base member 101 is detachably attached to the guide slide plate 4103 by engagement of the fasteners 4101 positioned on the rear surface 101d of the base member 101 exemplarily illustrated in FIG. 48, with the fasteners 4102 positioned on the front surface 4103a of the guide slide plate 4103 exemplarily illustrated in FIG. 57.

[0179] FIG. 59A exemplarily illustrates a top plan, partial disassembled view of the motorized body cleansing apparatus 100 detachably attachable to a support structure 2801, for example, a wall. The fasteners, for example, hook and loop fasteners 4108 are positioned on the front surface 2801a of the support structure 2801 and the rear surface 4106b of the base plate 4106 for allowing detachable attachment of the motorized body cleansing apparatus 100 to the support structure 2801. In an example, the hook sides 2802a of the hook and loop fasteners 4108 positioned on the front surface 2801a of the support structure 2801 are configured to engage with the loop sides 4108a of the hook and loop fasteners 4108 positioned on the rear surface 4106b of the base plate 4106.

[0180] FIG. 59B exemplarily illustrates top plan view of the assembled motorized body cleansing apparatus 100 detachably attached to the support structure 2801. The base plate 4106 of the motorized body cleansing apparatus 100 is detachably attached to the support structure 2801 using the fasteners, for example, the hook and loop fasteners 4108 as disclosed in the detailed description of FIG. 41.

[0181] FIG. 60A exemplarily illustrates a left side elevation view of the motorized body cleansing apparatus 100, showing movement of the guide slide plate 4103 with the base member 101 in an upward direction. The third transmission member 4806 of the motion transmission assembly 4820 exemplarily illustrated in FIGS. 52-54, engages with the fourth transmission member 4805 to move the guide slide plate 4103 in the upward direction as disclosed in the detailed description of the FIG. 55B. When the motor 4807 is activated or powered on, the motor 4807 transmits the torque to the fourth transmission member 4805 through the first transmission member 4812, the second transmission member 4813, and the third transmission member 4806 as disclosed in the detailed description of the FIGS. 53-54. The third transmission member 4806 applies the torque on the fourth transmission member 4805. The torque results in the movement of the fourth transmission member 4805, since the upward movement of the third transmission member 4806 is constrained by the second shaft 4824 exemplarily illustrated in FIGS. 52-54. The second shaft 4824 on which the third transmission member 4806 is mounted only rolls and cannot move in the upward direction.

[0182] FIG. 60B exemplarily illustrates a left side elevation view of the motorized body cleansing apparatus 100, showing movement of the guide slide plate 4103 with the base member 101 in a downward direction. The third transmission member 4806 of the motion transmission assembly 4820 exemplarily illustrated in FIGS. 52-54, engages with the fourth transmission member 4805 to move the guide slide plate 4103 in the downward direction as disclosed in the detailed description of the FIG. 55A.

[0183] The foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the body cleaning apparatus 100

and the methods disclosed herein. While the body cleaning apparatus 100 and the methods have been described with reference to various embodiments, it is understood that the words, which have been used herein, are words of description and illustration, rather than words of limitation. Furthermore, although the body cleaning apparatus 100 and the methods have been described herein with reference to particular means, materials, and embodiments, the body cleaning apparatus 100 and the methods are not intended to be limited to the particulars disclosed herein; rather, the body cleaning apparatus 100 and the methods extend to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims. Those skilled in the art, having the benefit of the teachings of this specification, may effect numerous modifications thereto and changes may be made without departing from the scope and spirit of the body cleaning apparatus 100 and the methods disclosed herein in their aspects.

I claim:

1. A motorized body cleansing apparatus comprising:

- a base plate comprising a front surface and a rear surface, the rear surface of the base plate detachably attached to a support structure using first fasteners, the base plate comprising guideways positioned on the front surface of the base plate, the base plate further comprising a cavity configured between the guideways on the front surface of the base plate;
- a plurality of rollers positioned in the guideways of the base plate, the rollers configured to roll within the guideways of the base plate;
- a guide slide plate positioned on the rollers at the front surface of the base plate, the guide slide plate comprising elongate guide projections extending from a rear surface of the guide slide plate, the elongate guide projections of the guide slide plate configured to slide on the rollers at the front surface of the base plate;
- a split cover plate positioned between the base plate and the guide slide plate, the split cover plate comprising:
 - a securing element fixedly attached to a body section of the base plate, the securing element comprising vertical slots configured to accommodate the elongate guide projections of the guide slide plate; and
 - a cap element fixedly attached to an upper section of the base plate, the cap element configured to secure the guide slide plate to the base plate to preclude the guide slide plate from sliding out of the base plate;
- a motion transmission assembly positioned in the cavity of the base plate and operably coupled to the guide slide plate, the motion transmission assembly configured to move the guide slide plate in an upward direction and a downward direction over the rollers; and
- a base member detachably attached to a front surface of the guide slide plate using second fasteners, the base member configured with one or more contoured profiles to conform to a body part of a user, the base member comprising one or more cleansing members attached to a front surface of the base member for cleansing the body part when the body part contacts and applies a pressure on the one or more cleansing members, while the motion transmission assembly moves the guide slide plate with the detachably attached base member in the upward direction and the downward direction.

2. The motorized body cleansing apparatus of claim 1, wherein the motion transmission assembly comprises:

- a motor fixedly attached in the cavity of the base plate;
- a worm gear mounted on a motor shaft of the motor;
- a first transmission member mounted on a first shaft fixedly attached in and extending outwardly from the cavity of the base plate, the first transmission member configured to operably engage with the worm gear;
- a second transmission member mounted on a second shaft rotatably attached in and extending outwardly from the cavity of the base plate, the second transmission member configured to operably engage with the first transmission member; and
- a third transmission member positioned in front of the second transmission member and mounted on the second shaft extending outwardly from the cavity of the base plate, the third transmission member configured to engage with a fourth transmission member fixedly attached to the rear surface of the guide slide plate, wherein the fourth transmission member along with the guide slide plate is configured to move in the upward direction and the downward direction by transmission of motion from the motor to the fourth transmission member via the first transmission member, the second transmission member, and the third transmission member.

3. The motorized body cleansing apparatus of claim 2, further comprising at least one switch positioned on the base plate, wherein the at least one switch is in electrical communication with the motor of the motion transmission assembly for activating the motor.

4. The motorized body cleansing apparatus of claim 1, wherein the first fasteners are hook and loop fasteners comprising hook sides and loop sides, wherein one of the hook sides and the loop sides are attached to the rear surface of the base plate, and wherein an opposing one of the hook sides and the loop sides are attached to a front surface of the support structure for allowing a detachable attachment of the motorized body cleansing apparatus to the support structure.

5. The motorized body cleansing apparatus of claim 4, wherein the opposing one of the hook sides and the loop sides of the hook and loop fasteners are configured on one or more strips affixed on the front surface of the support structure.

6. The motorized body cleansing apparatus of claim 5, wherein the one or more strips further comprise opposing loop extensions positioned at opposing ends of the one or more strips, wherein the opposing loop extensions are configured to facilitate removal of the one of the hook sides and the loop sides of the hook and loop fasteners attached to the rear surface of the base plate from the opposing one of the hook sides and the loop sides of the hook and loop fasteners attached to the front surface of the support structure.

7. The motorized body cleansing apparatus of claim 1, wherein the base member is configured as a membrane attached to a rear surface of the one or more cleansing members, wherein the membrane comprises drainage openings for draining fluids passing through the one or more cleansing members.

8. The motorized body cleansing apparatus of claim 1, wherein the one or more cleansing members comprise a retention member attached to the front surface of the base member, wherein the retention member is configured to retain a cleansing agent dispensed on the retention member,

and wherein the retention member comprises a plurality of cavities configured to accommodate a plurality of flexible bristles, and wherein the flexible bristles are fixedly attached to the front surface of the base member and positioned within the cavities of the retention member, and wherein the flexible bristles and the retention member are configured to cleanse the body part when the body part contacts and applies the pressure on the flexible bristles and the retention member.

9. The motorized body cleansing apparatus of claim 7, wherein the retention member is made of a sponge material.

10. The motorized body cleansing apparatus of claim 1, wherein each of the one or more cleansing members comprises:

- a stem attached to and extending outwardly from the front surface of the base member;
- a cluster of flexible bristles, the flexible bristles curvedly branching outwards from an upper end of the stem; and
- a retention member detachably attached to one or more of the flexible bristles, the retention member configured to retain a cleansing agent dispensed on the retention member and cleanse the body part, when the body part contacts and applies the pressure on the one or more of the flexible bristles with the retention member.

11. The motorized body cleansing apparatus of claim 10, wherein the one or more of the flexible bristles curvedly branching outwards from the upper end of the stem defines a reservoir within the cluster, wherein the reservoir is configured to store and retain the cleansing agent and release the cleansing agent along the flexible bristles when the body part contacts and applies the pressure on the stem.

12. The motorized body cleansing apparatus of claim 10, wherein the retention member is detachably attached to a tip of each of the one or more of the flexible bristles, and wherein the retention member is configured to retain the cleansing agent proximal to the tip of the each of the one or more of the flexible bristles and cleanse the body part, when the body part contacts and applies the pressure on the one or more of the flexible bristles.

13. The motorized body cleansing apparatus of claim 10, wherein the cluster of the flexible bristles comprises one or more central flexible bristles extending from the upper end of the stem of the each of the one or more of the cleansing members, and radial flexible bristles surrounding the one or more central flexible bristles, wherein each of the radial flexible bristles curvedly branch outwards from the upper end of the stem to define a substantially spherical space above the upper end of the stem, wherein the substantially spherical space is configured to receive the retention member.

14. The motorized body cleansing apparatus of claim 13, wherein the retention member comprises one or more cavities configured to receive the one or more central flexible bristles when the retention member is inserted into the substantially spherical space defined by the radial flexible bristles.

15. The motorized body cleansing apparatus of claim 14, wherein the one or more central flexible bristles are configured to be exposed through the one or more cavities of the retention member to scrub the body part after the retention member collapses under a substantial increase in the pressure from the body part on the retention member.