



US009653637B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 9,653,637 B2**
(45) **Date of Patent:** **May 16, 2017**

(54) **AIR COOLED PHOTOVOLTAIC CELLS**

(76) Inventors: **William Edward Lee**, Kailua, HI (US);
Robert F. Pienkowski, Chicago, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1295 days.

3,331,462 A * 7/1967 Wernicke 180/129
3,353,191 A * 11/1967 Dahly 2/171.3
3,442,469 A * 5/1969 Davis 244/23 C
3,572,613 A * 3/1971 Porter B64C 39/06
244/12.2
3,774,865 A * 11/1973 Pinto 244/23 C
4,053,327 A * 10/1977 Meulenberg, Jr. .. H01L 31/0547
136/256

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **12/633,109**

(22) Filed: **Dec. 8, 2009**

DE 10014924 A1 9/2001
JP 08-286250 A 11/1996

(Continued)

(65) **Prior Publication Data**

US 2010/0139738 A1 Jun. 10, 2010

Related U.S. Application Data

(60) Provisional application No. 61/121,115, filed on Dec. 9, 2008.

(51) **Int. Cl.**

H01L 31/052 (2014.01)

H02S 20/00 (2014.01)

H02S 40/42 (2014.01)

(52) **U.S. Cl.**

CPC **H01L 31/0521** (2013.01); **H02S 20/00**
(2013.01); **H02S 40/425** (2014.12); **Y02E**
10/50 (2013.01)

(58) **Field of Classification Search**

CPC H01L 31/052; H02K 29/10; B60K 16/00;
F03G 6/001; F03G 6/00; F21S 9/03;
F21V 29/02; Y02T 10/90; H02S 10/12;
H02S 40/425; H02S 20/00; Y02E 10/50

USPC 136/243, 251, 259, 246
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS


1,993,419 A * 3/1935 Stalker 244/208
3,325,930 A * 6/1967 Braeutigam 40/473

(57)

ABSTRACT

An apparatus is provided that comprises photovoltaic cells provided on a first rotatable member, an electric motor having an axial shaft, and a second rotatable member provided with an impeller. The photovoltaic cells capture and convert the solar energy into electrical energy. The electric motor is connected to and is in electric communication with the photovoltaic cells for powering the electric motor. The electric motor converts the electrical energy into mechanical energy for rotating the photovoltaic cells in a first direction about a central axis and for rotating the axial shaft connected to an impeller in a second direction about the central axis. The rotating axial shaft rotates the impeller at high revolutions per minute which generates a flow of air that is directed to the rotating photovoltaic cells on the first rotatable member. The photovoltaic cells are cooled by the air-flow and operate at a lower temperature.

8 Claims, 18 Drawing Sheets

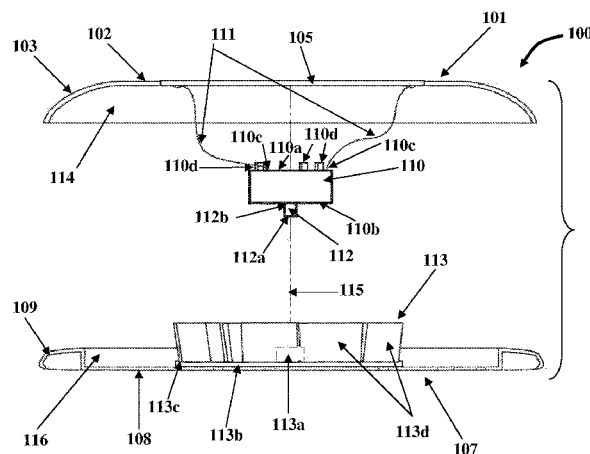

(56)

References Cited

U.S. PATENT DOCUMENTS

4,065,873	A	1/1978	Jones	
4,204,357	A	5/1980	Harrington	
4,634,343	A *	1/1987	Nakamats	416/3
4,674,708	A *	6/1987	del Castillo	244/12.2
4,680,815	A *	7/1987	Hirsch et al.	2/171.3
4,778,128	A *	10/1988	Wright et al.	244/23 C
4,893,356	A *	1/1990	Waters	2/171.3
5,203,521	A *	4/1993	Day	244/12.2
5,297,759	A *	3/1994	Tilbor et al.	244/17.11
5,349,975	A	9/1994	Valdner	
6,032,291	A *	3/2000	Asenguah et al.	2/171.3
6,122,773	A *	9/2000	Katz	2/171.3
6,308,912	B1 *	10/2001	Kirjavainen	244/12.2
6,760,925	B1 *	7/2004	Maxwell	2/171.3
6,837,457	B2 *	1/2005	Kirjavainen	244/17.23
7,255,623	B2 *	8/2007	Davis	A63H 27/04 244/23 C
7,331,064	B1 *	2/2008	Quintal	2/209.13
7,332,842	B2 *	2/2008	Kasahara et al.	310/84
7,347,758	B2 *	3/2008	Moore	446/47
7,559,506	B2 *	7/2009	Kissel, Jr.	B64C 39/001 244/17.11
2008/0047270	A1	2/2008	Gilbert	

FOREIGN PATENT DOCUMENTS

WO	WO2004080556	A2	9/2004
WO	WO2005-117142	A1	12/2005
WO	WO2008-088311	A2	7/2008
WO	WO2008-101419	A2	8/2008
WO	WO2010077620	A2	7/2010

* cited by examiner

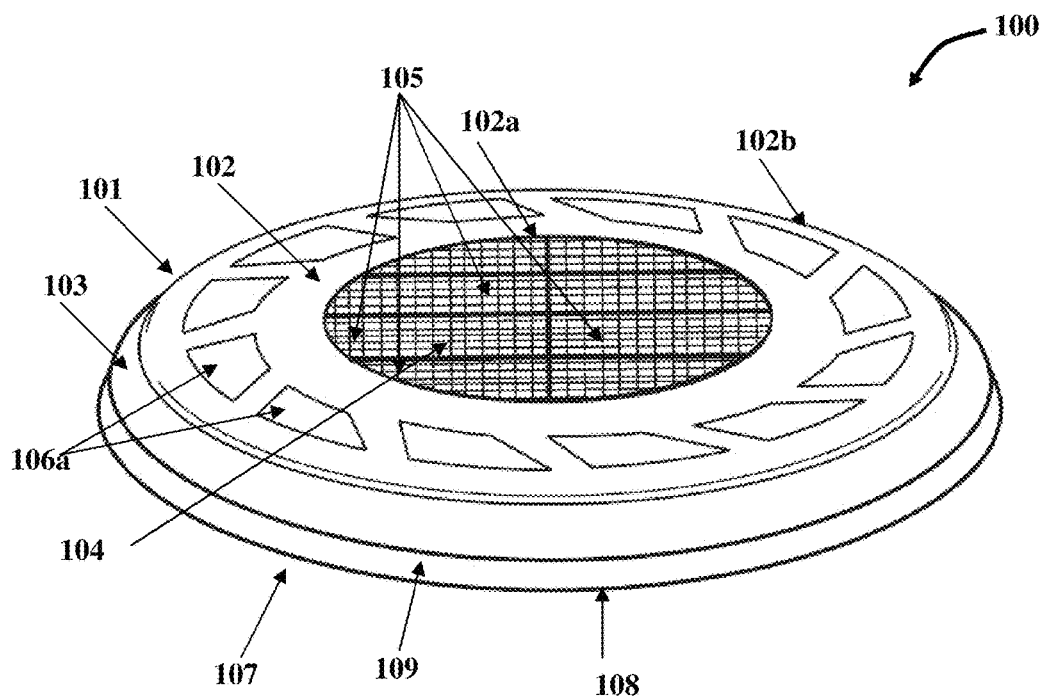


FIG. 1

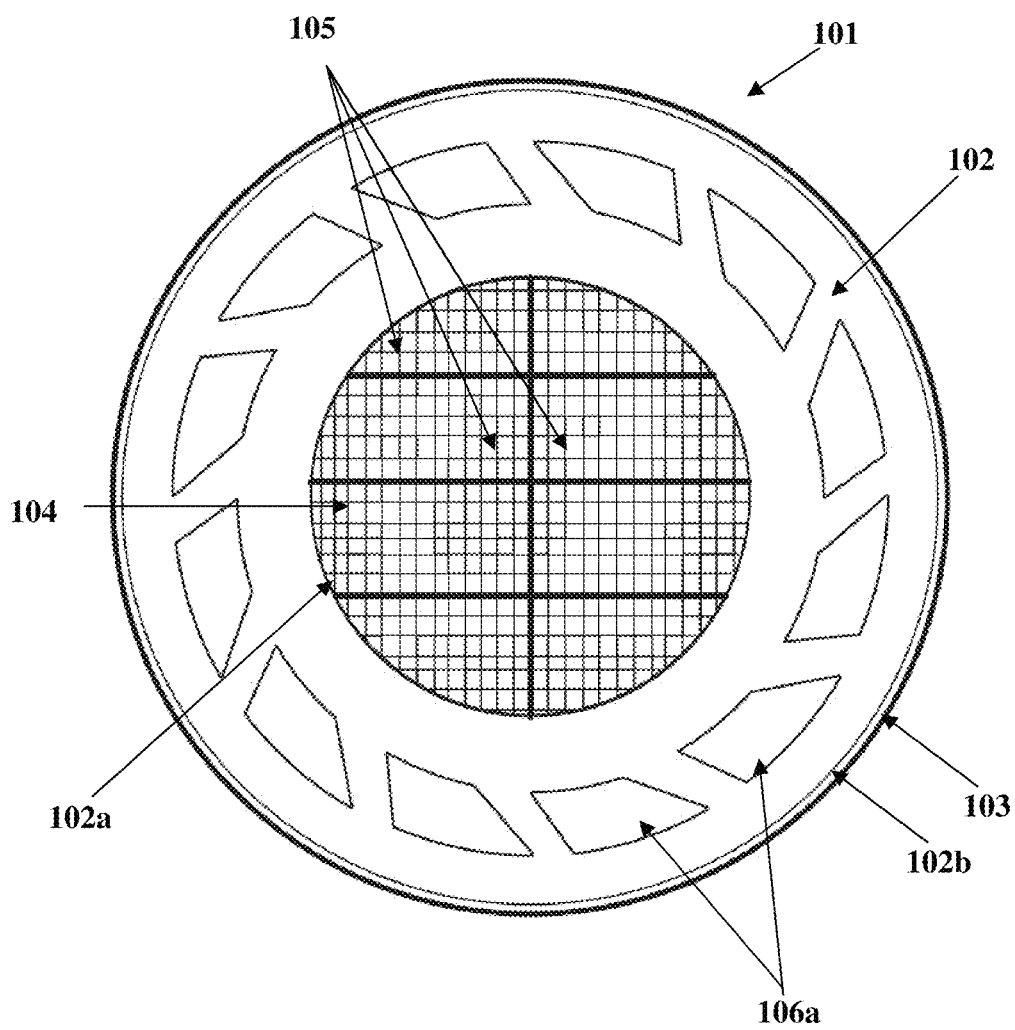


FIG. 2

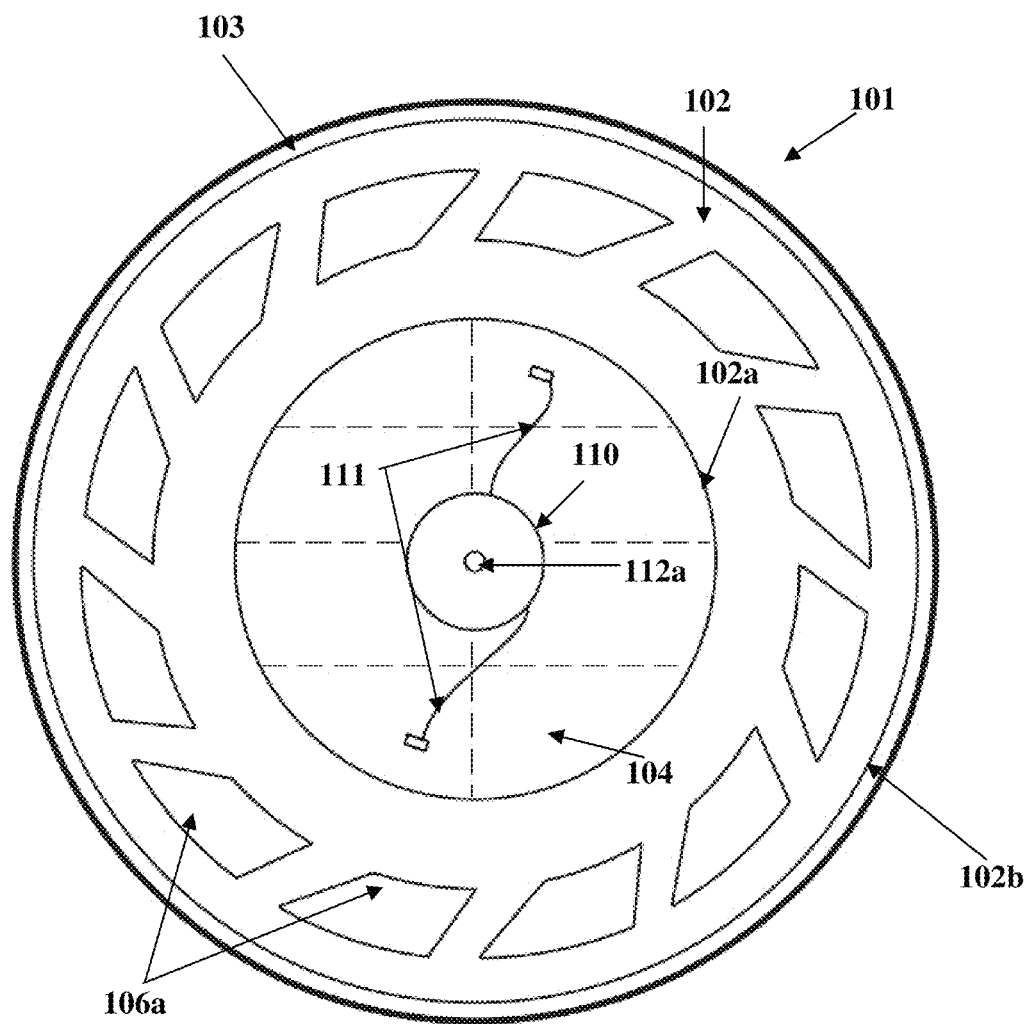


FIG. 3

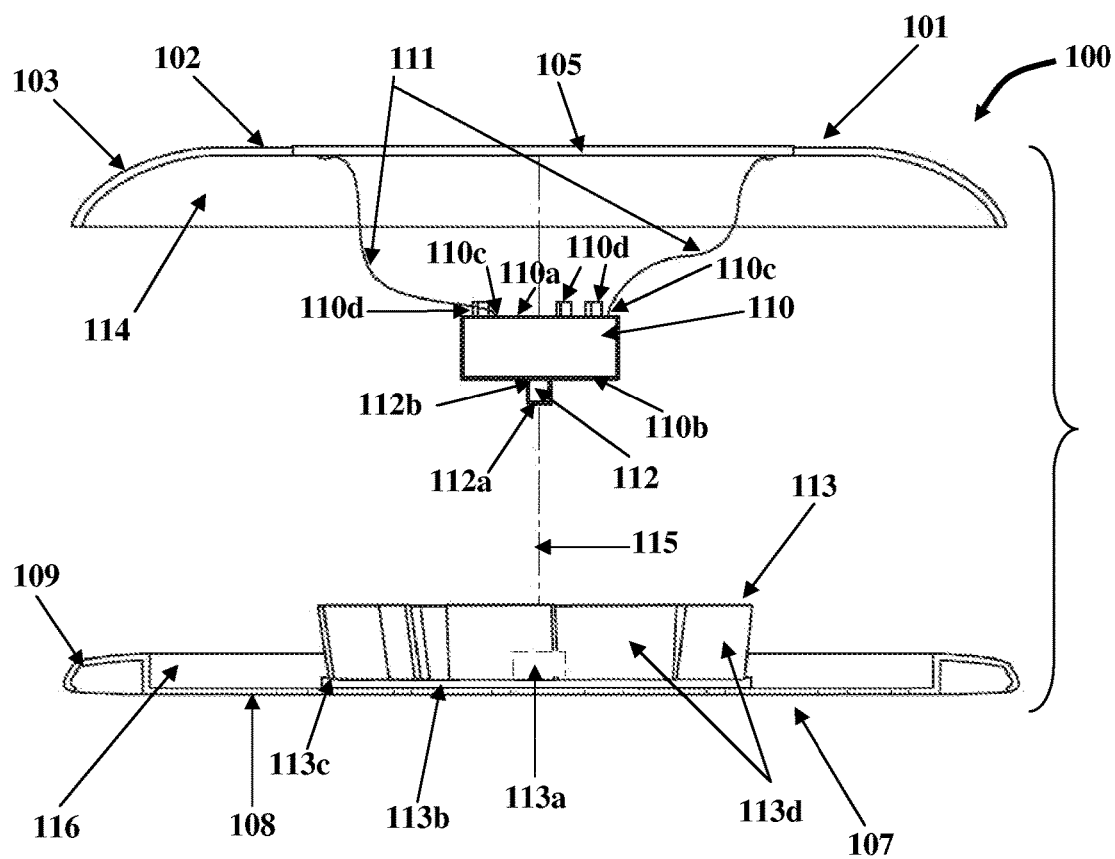


FIG. 4

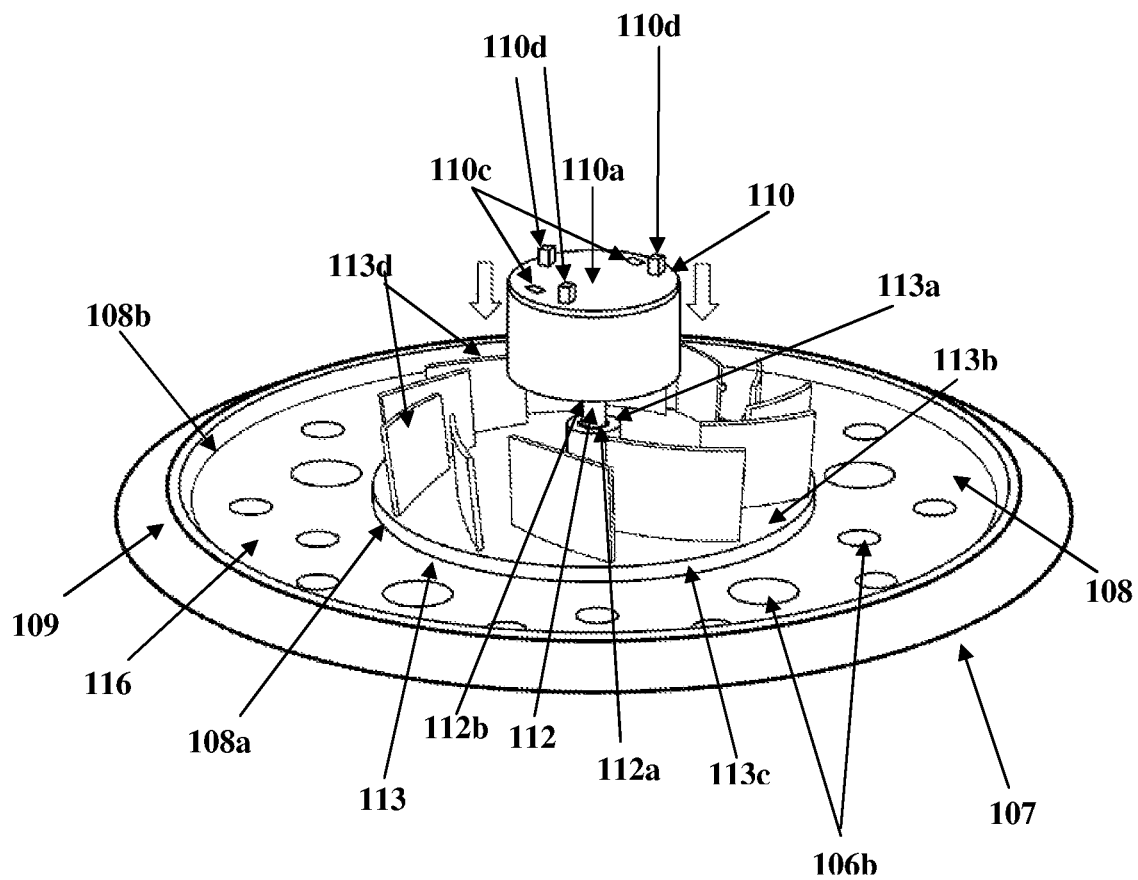


FIG. 5

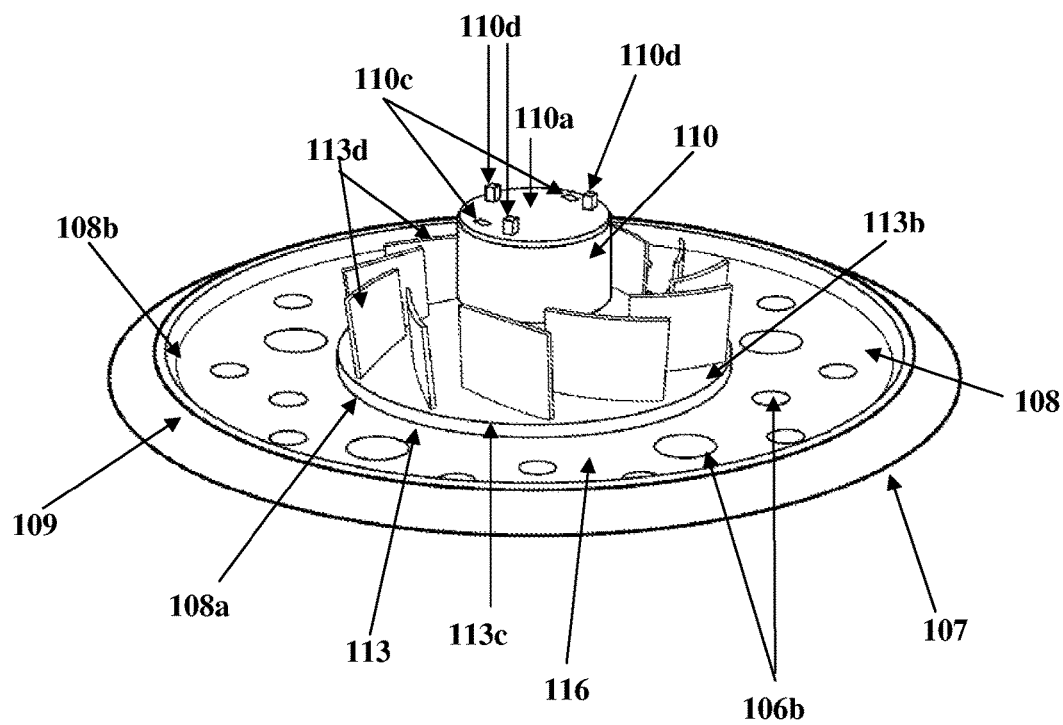


FIG. 6

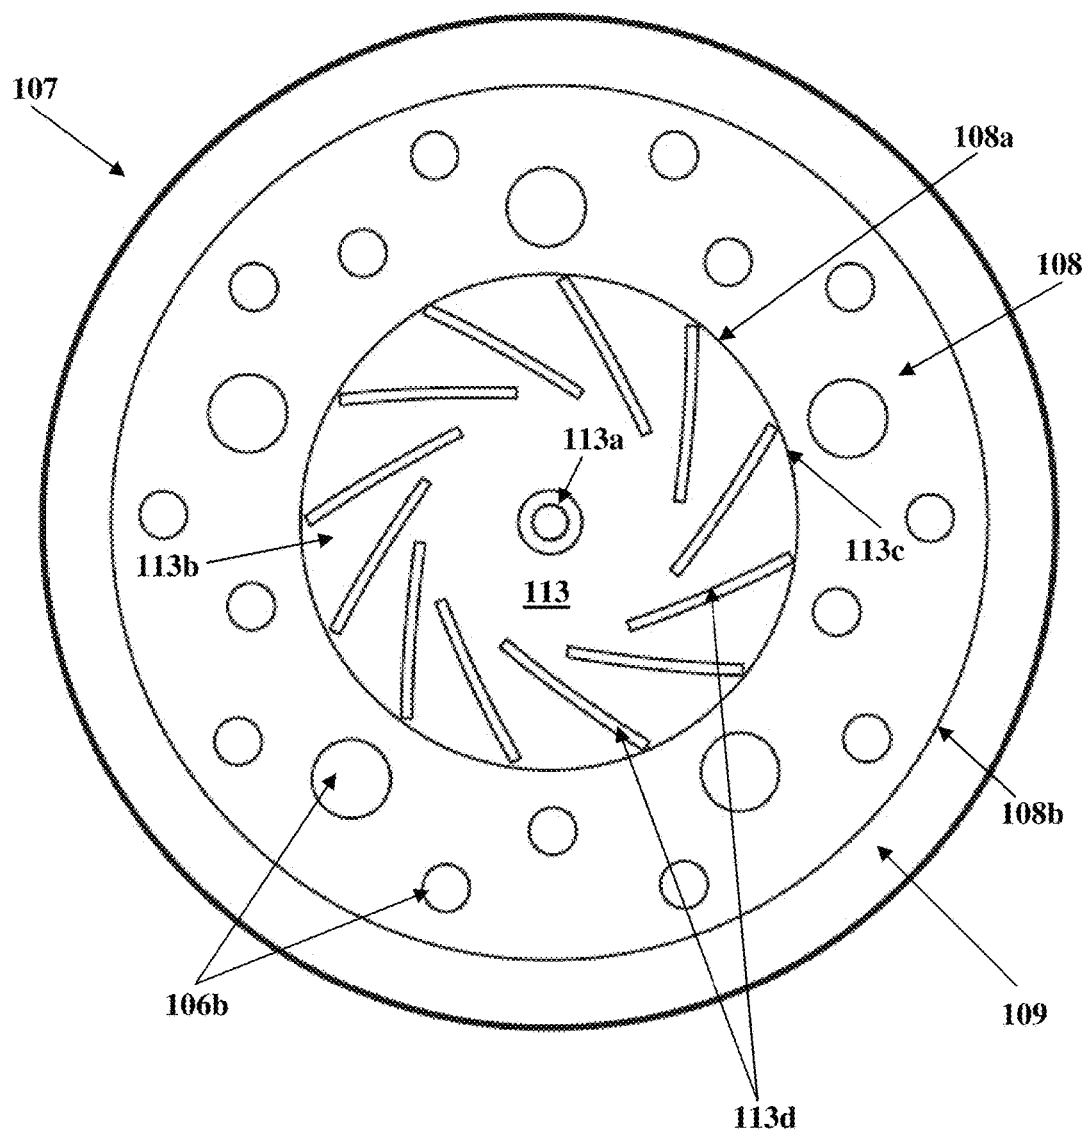


FIG. 7

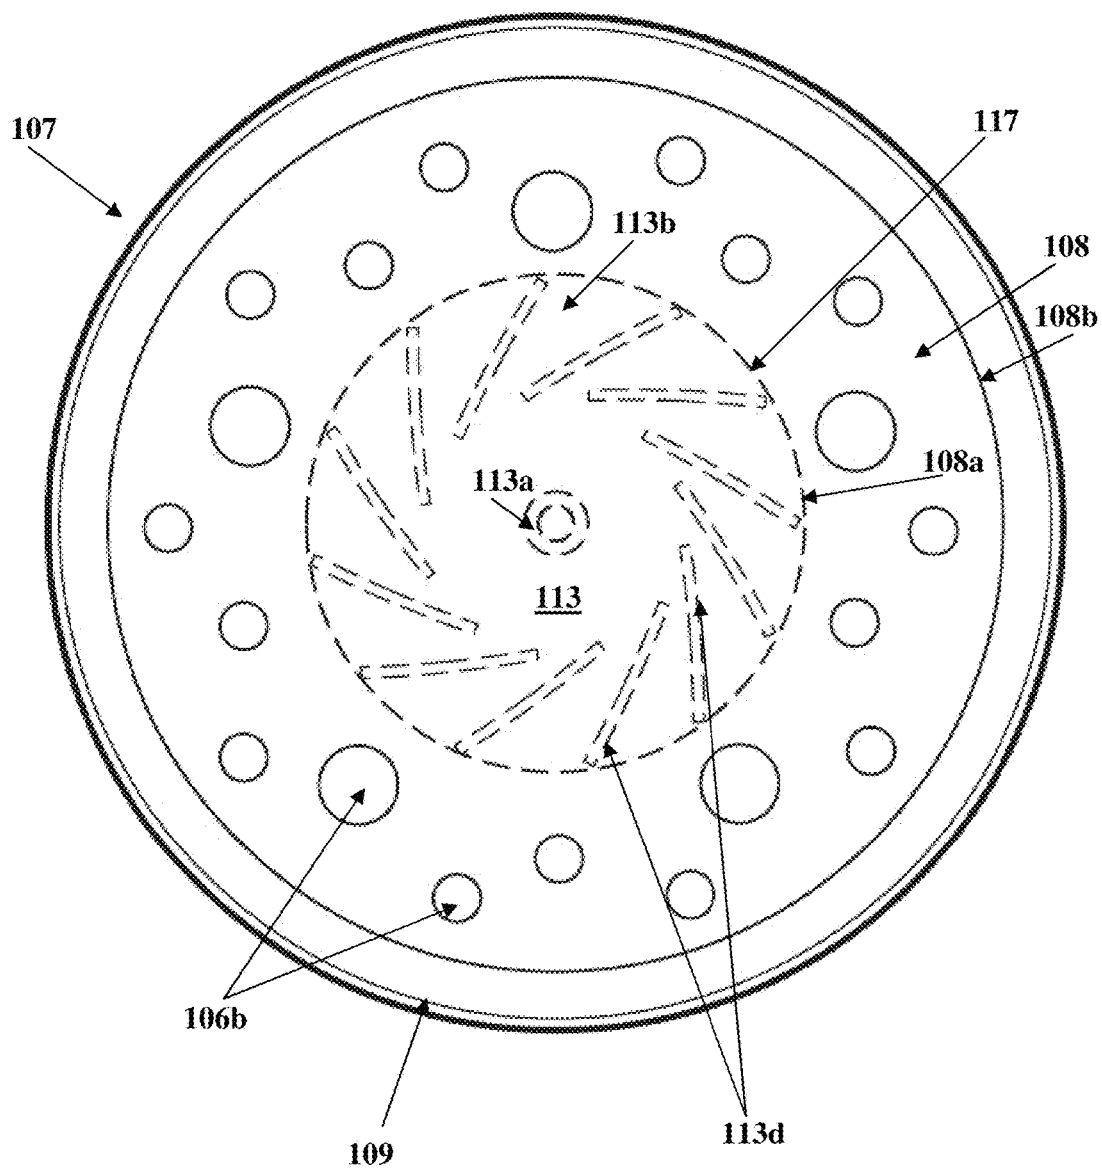


FIG. 8

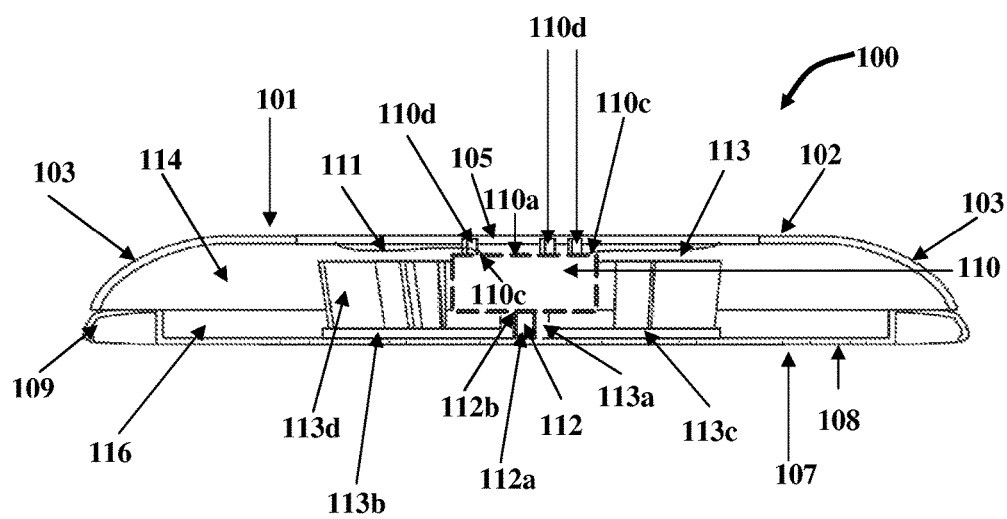


FIG. 9

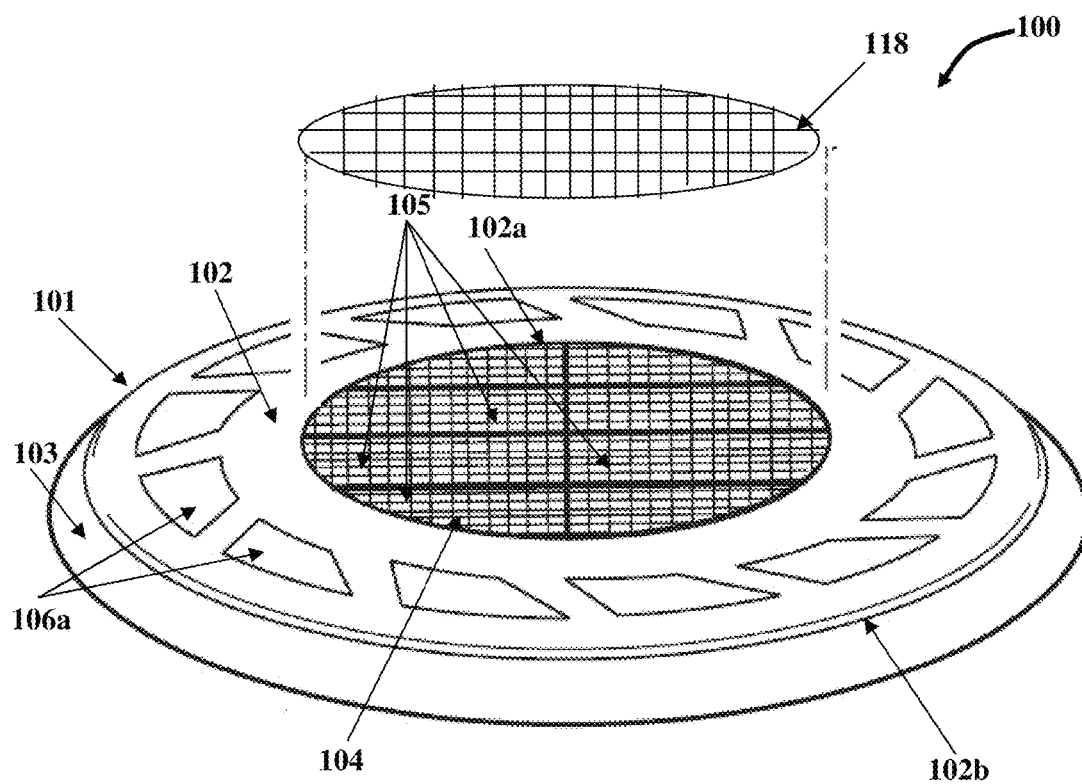


FIG. 10

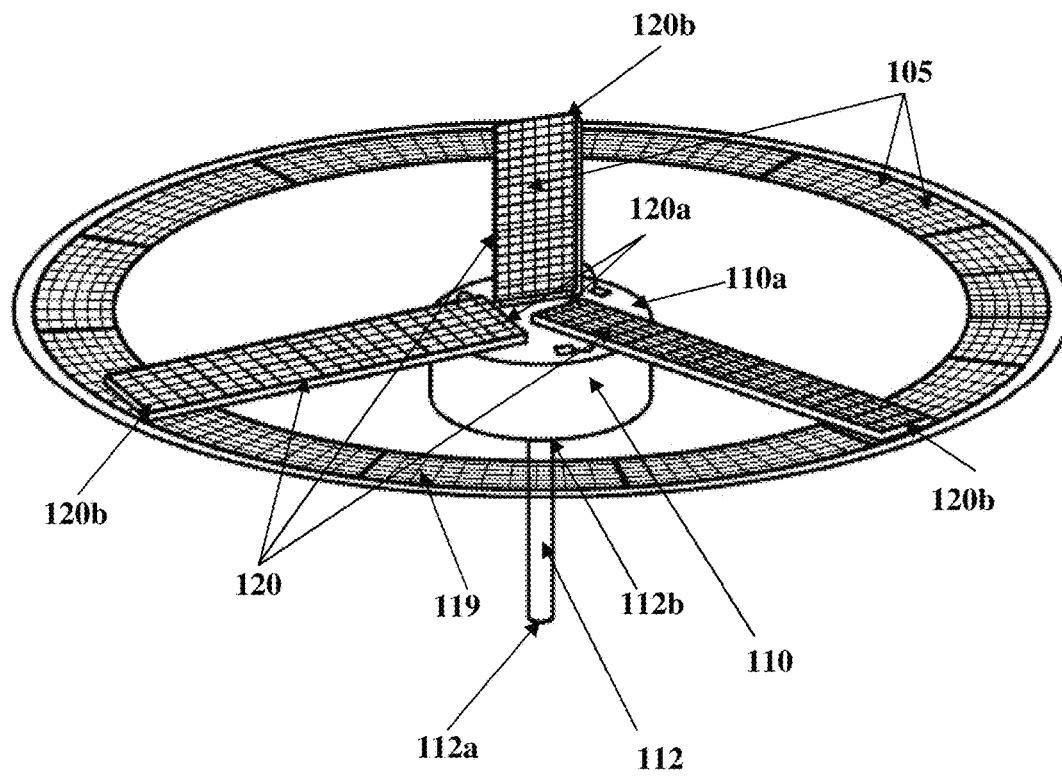


FIG. 11

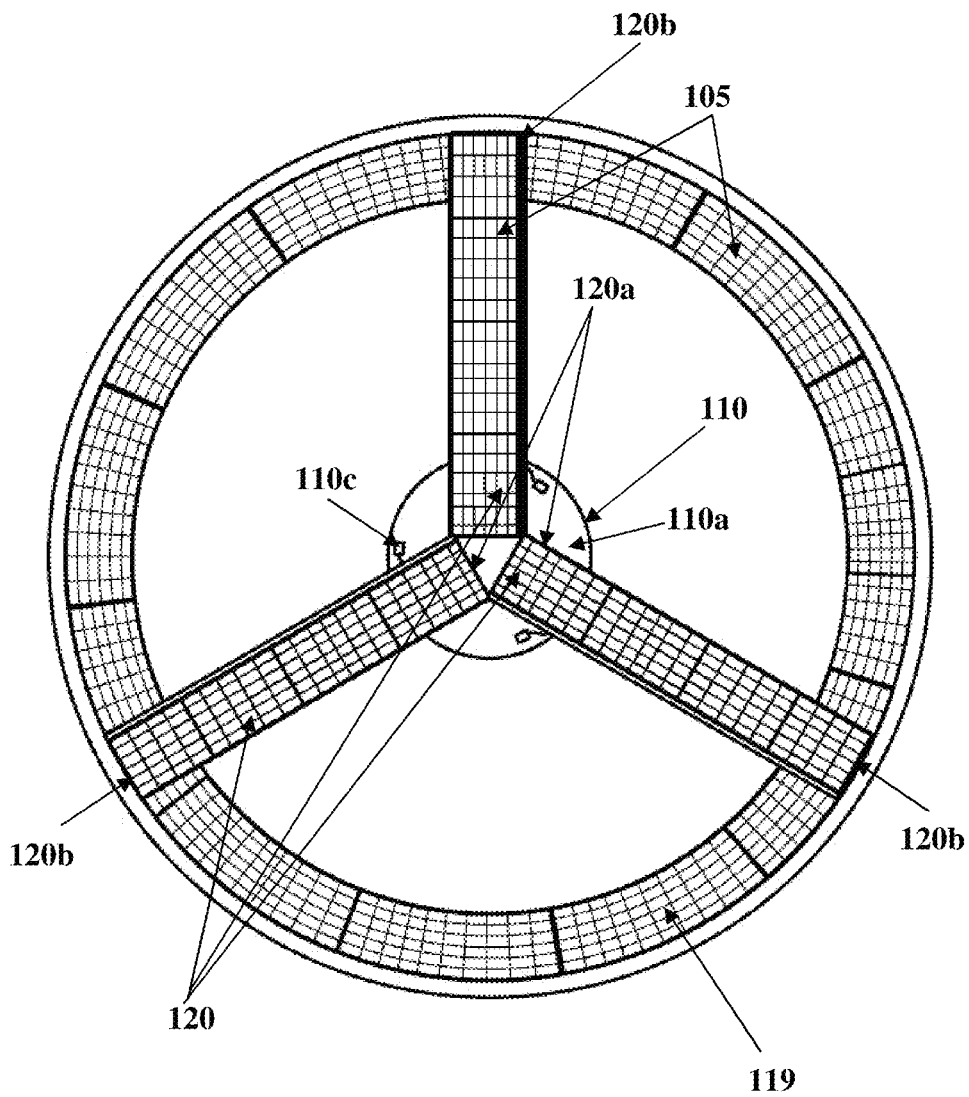


FIG. 12

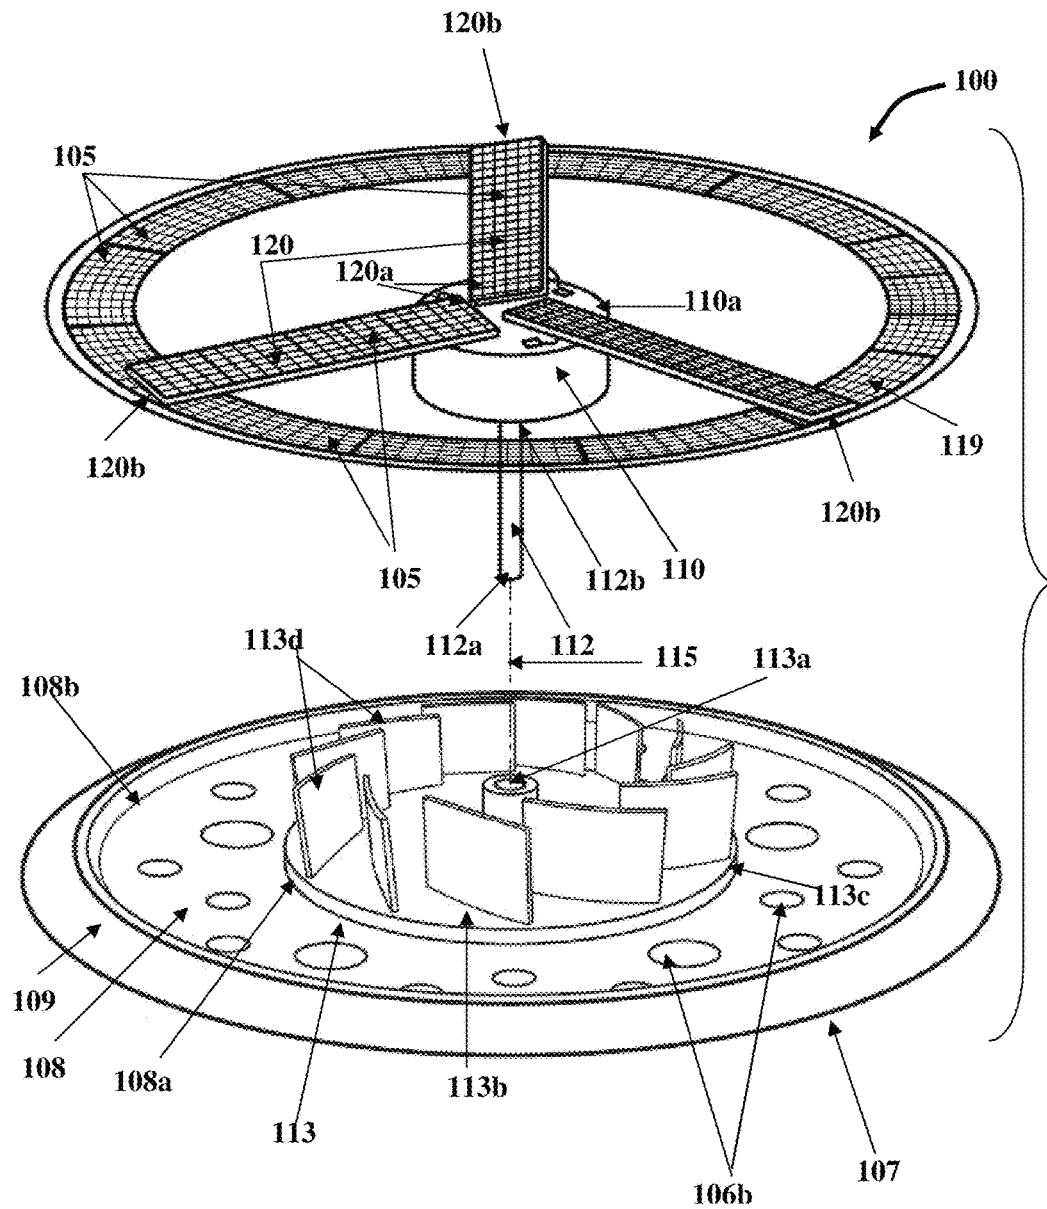


FIG. 13

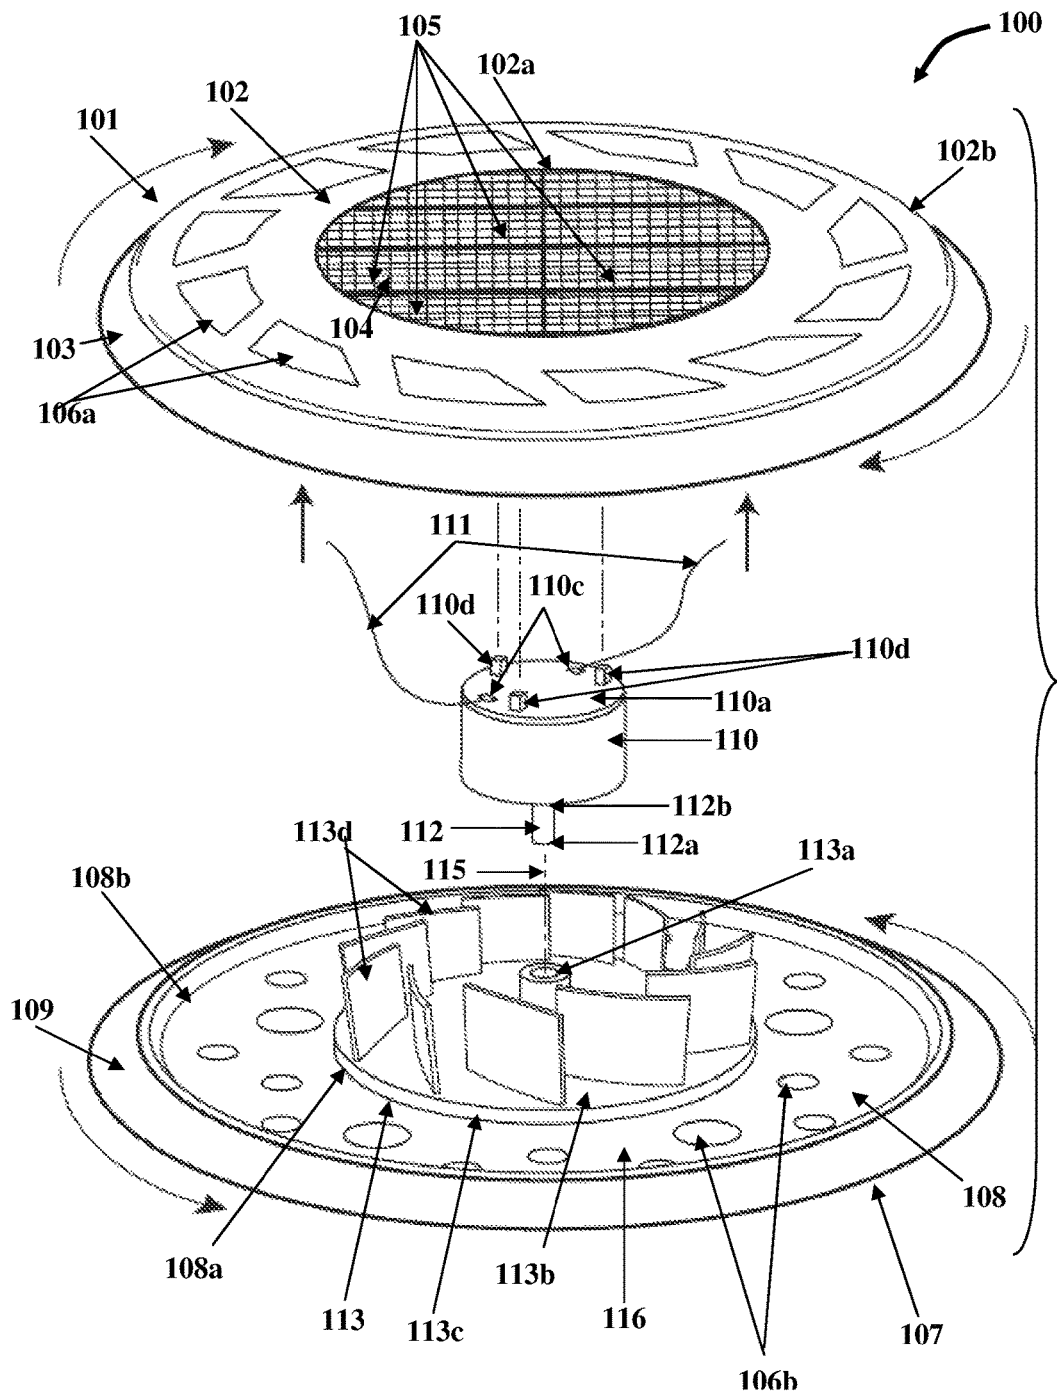


FIG. 14

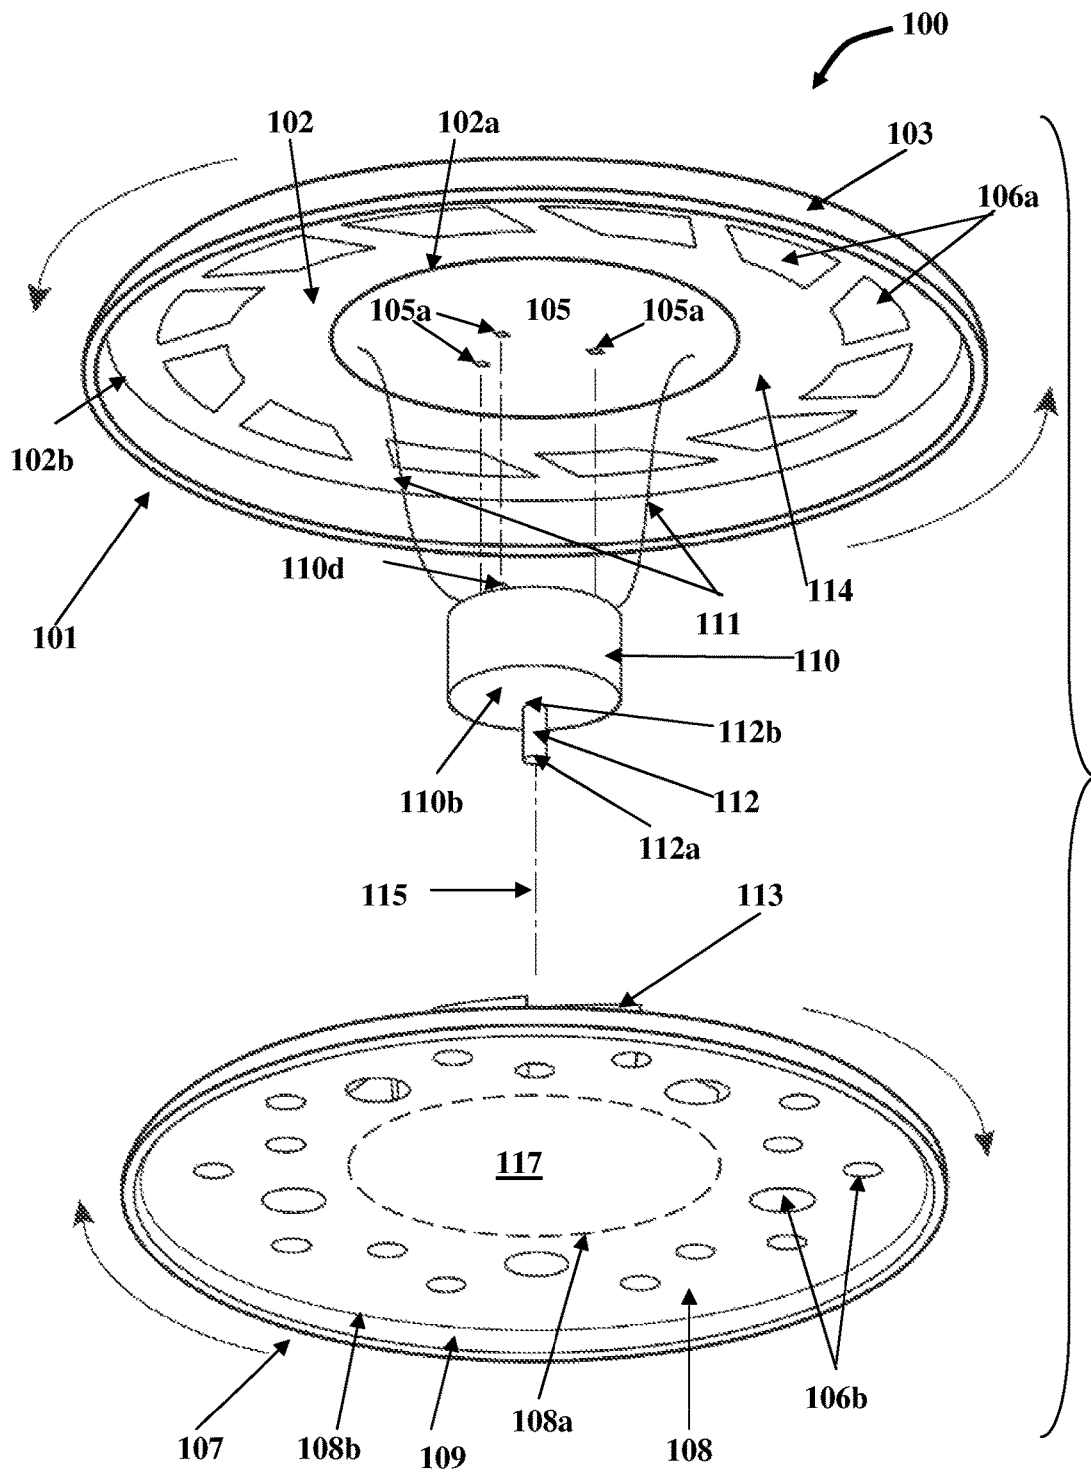


FIG. 15

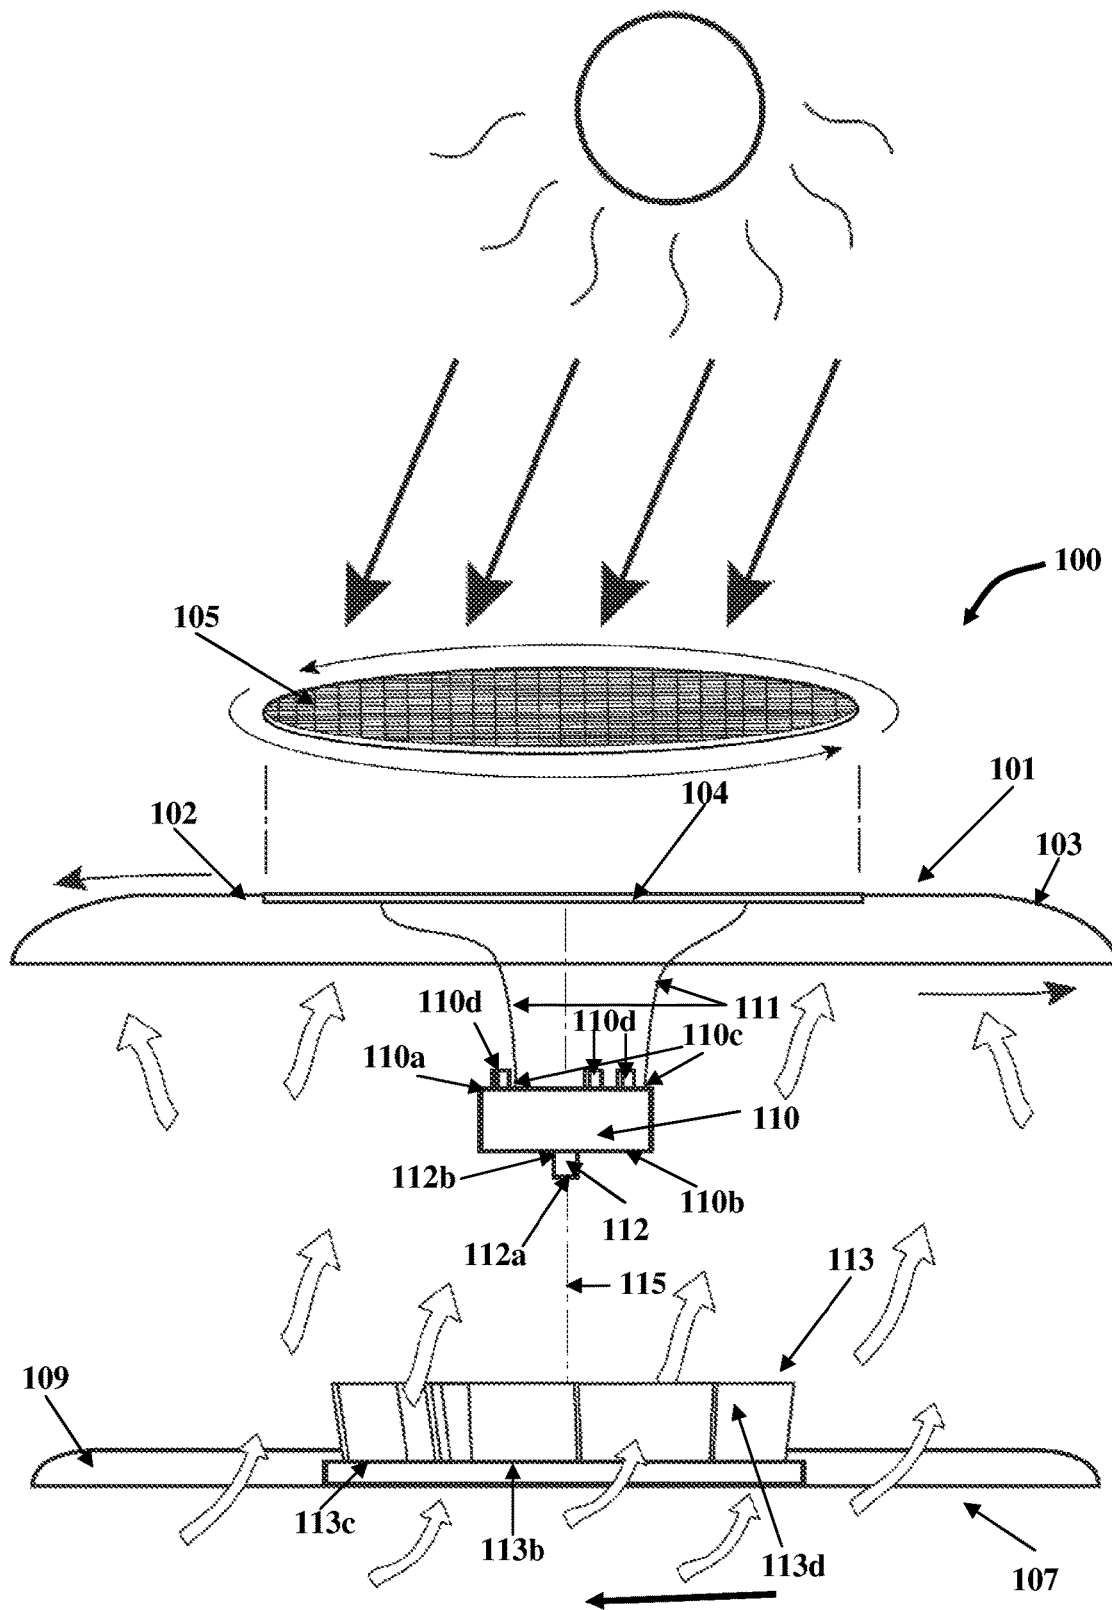


FIG. 16

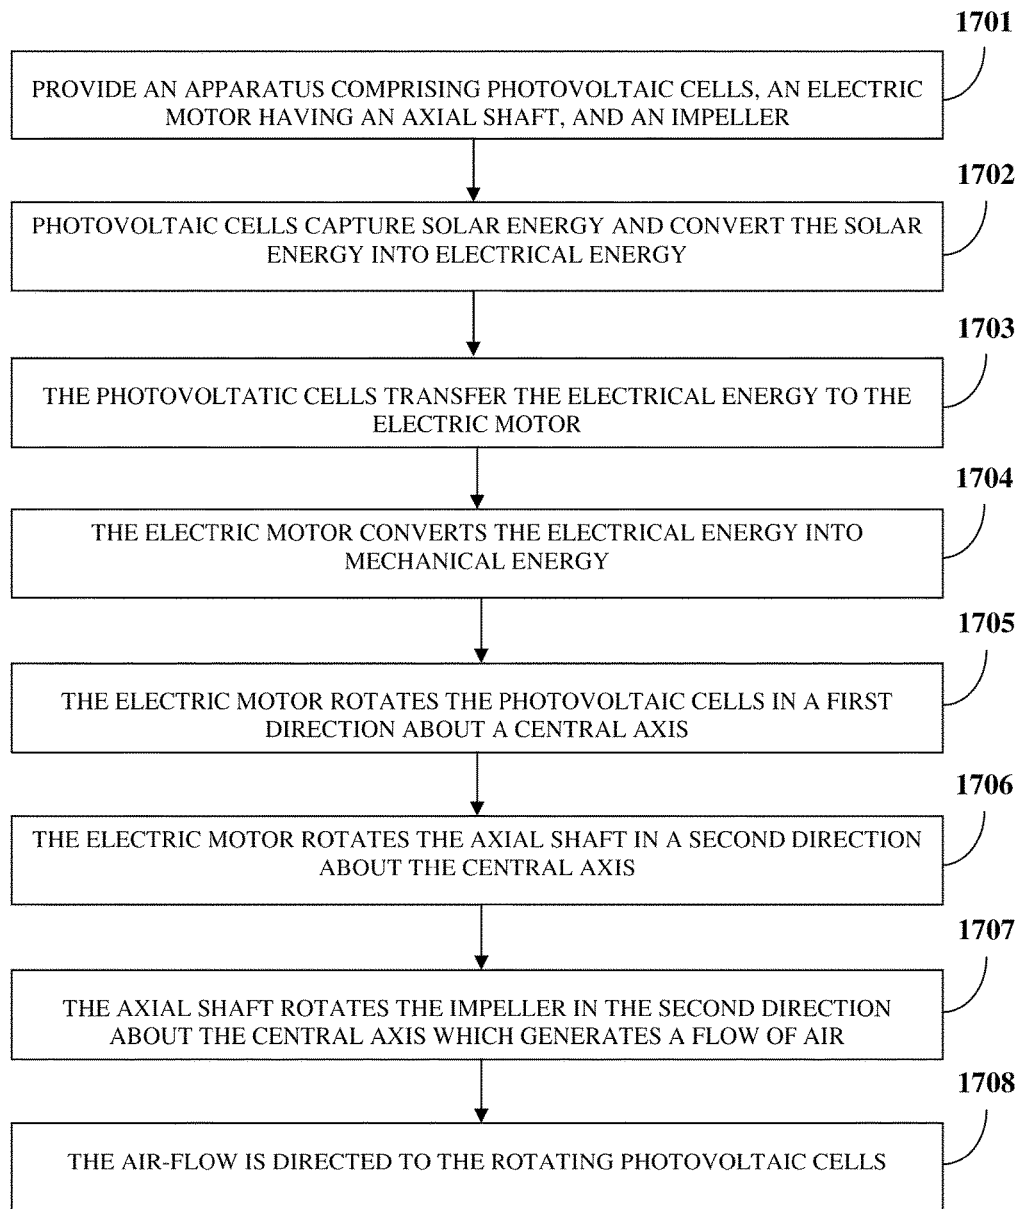


FIG. 17

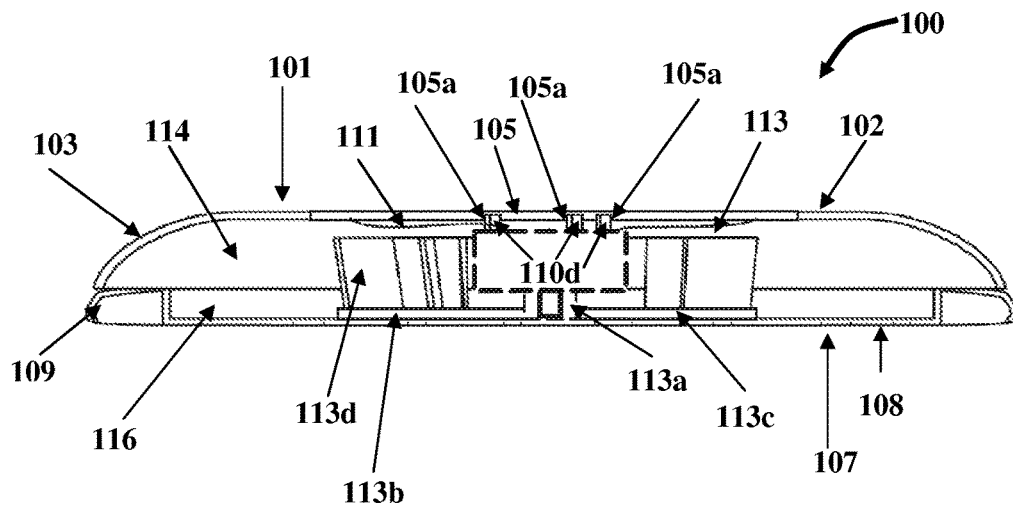


FIG. 18

1

AIR COOLED PHOTOVOLTAIC CELLS**CROSS REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of provisional patent application No. 61/121,115 titled "Solar Powered Flying Disc Frisbee & High Speed Rotation Solar Photovoltaic Cells", filed on Dec. 9, 2008 in the United States Patent and Trademark Office.

The specification of the above referenced patent application is incorporated herein by reference in its entirety.

BACKGROUND

Solar technology deals with the use of solar energy for a multitude of practical applications. Photovoltaic cells convert solar energy directly into electrical energy using the photovoltaic effect which is well known in the art.

Typical solar powered devices comprise multiple stationary photovoltaic cells positioned on a surface. The photovoltaic cells capture solar energy and convert the captured solar energy into electrical energy. In some cases, the captured solar energy overheats the photovoltaic cells resulting in lower solar energy conversion efficiency by the photovoltaic cells. Solar energy comprises packets of energy, for example, photons. When photons strike a photovoltaic cell, the photons may be reflected or absorbed, or they may pass right through the photovoltaic cell. The photovoltaic cell is made out of a semiconductor material. When a photon is absorbed by the photovoltaic cell, electrons from the atoms of the semiconductor material are dislodged from their position. These electrons travel toward the front surface of the photovoltaic cell and flow on the front surface of the photovoltaic cell. This flow of electrons generates electrical energy.

The temperature of the photovoltaic cell increases due to factors, for example, solar energy trapped inside the photovoltaic cells, etc. The increase in temperature of the photovoltaic cells decreases the efficiency of the photovoltaic cells. The decrease in efficiency is because molecular motion in the semiconductor material of the photovoltaic cell becomes more intense and the movement of electrons is impeded. Furthermore, when the temperature of the photovoltaic cell rises, the semiconductor material of the photovoltaic cell may expand or contract, thereby reducing the lifespan of the photovoltaic cells. Hence, there is a need for cooling the surface of the photovoltaic cells. Stationary photovoltaic cells do not produce a cooling effect. There is a long felt but unresolved need for an apparatus that cools the photovoltaic cells by directing air on the photovoltaic cells, thereby removing the heat from the surface of the photovoltaic cells.

The amount of electrical energy generated by the photovoltaic cell is directly proportional to the amount of solar energy captured by the photovoltaic cells. The amount of energy the photovoltaic cell captures is a function of both the size or surface area of the photovoltaic cell and the intensity or brightness of the sunlight that strikes the photovoltaic cell. Often, the surface area of the photovoltaic cells is increased to increase the amount of electrical energy output of the photovoltaic cells. Photovoltaic cells with larger surface areas are expensive. Therefore, there is a long felt but unresolved need for an apparatus that enables photovol-

2

taic cells to operate at a lower temperature to increase the electrical energy output of the photovoltaic cells.

SUMMARY OF THE INVENTION

This summary is provided to introduce a selection of concepts in a simplified form that are further described in the detailed description of the invention. This summary is not intended to identify key or essential inventive concepts of the claimed subject matter, nor is it intended for determining the scope of the claimed subject matter.

The apparatus and method disclosed herein addresses the above stated needs for enabling photovoltaic cells to operate at a lower temperature and increase the amount of electrical energy output. The continuous rotation of the photovoltaic cells at high revolutions per minute (rpm) and forced airflow past the rotating photovoltaic cells ensures that the photovoltaic cells do not overheat and therefore increases their efficiency.

The apparatus disclosed herein comprises photovoltaic cells, an electric motor having an axial shaft, and an impeller. The photovoltaic cells are provided on a rotatable member. The photovoltaic cells capture solar energy and convert the solar energy into electrical energy. The electric motor is in electric communication with the photovoltaic cells for powering the electric motor. The axial shaft extends axially from the electric motor to an impeller. The axial shaft is powered by the electric motor. The impeller is coaxially connected to the axial shaft. The rotation of the axial shaft by the electric motor produces an upward air-flow by the rotating impeller past the rotating photovoltaic cells and allows the rotating photovoltaic cells to operate at a lower temperature.

In an embodiment, the apparatus disclosed herein comprises a first rotatable member and a second rotatable member. The photovoltaic cells are provided on the first rotatable member. The first rotatable member is, for example, a generally disc-shaped rotatable member. The first rotatable member comprises an upper section of a generally circular shape and a curved side wall. The upper section is defined between an inner periphery and an outer periphery. The curved side wall of the first rotatable member is connected to the outer periphery of the upper section to define an annular space within the first rotatable member. The inner periphery of the upper section defines an axial opening of a generally circular shape for housing the photovoltaic cells. The photovoltaic cells are positioned within the axial opening of the first rotatable member and on the upper section of the first rotatable member.

In an embodiment, one or more concentrator lenses are mounted on the photovoltaic cells for concentrating and directing the solar energy into the photovoltaic cells. The photovoltaic cells provided on the first rotatable member capture solar energy and convert the solar energy into electrical energy. The electrical energy is transferred to the electric motor, for example, a direct current (DC) motor, having an axial shaft. The electric motor is connected to and is in electric communication with the photovoltaic cells. The electric motor is coaxially disposed in the annular space defined by the first rotatable member. The electric motor converts the electrical energy produced by the photovoltaic cells into mechanical energy for rotating the photovoltaic cells about a central axis and for rotating the axial shaft connected to the impeller about the central axis. The electric motor rotates the photovoltaic cells provided on the first rotatable member, for example, in a clockwise direction,

about the central axis and rotates the axial shaft connected to the impeller, for example, in a counterclockwise direction, about the central axis.

The axial shaft of the electric motor has a first end and a second end. The first end of the axial shaft is rotatably connected within the electric motor and the second end of the axial shaft is connected to the impeller provided on the second rotatable member. The second rotatable member is, for example, a generally disc-shaped rotatable member. The rotating axial shaft rotates the impeller and the second rotatable member at high revolutions per minute (rpm) about the central axis. The rotation of the impeller generates a flow of air.

The impeller comprises a central hub, an axial groove axially positioned in the central hub, and multiple blades positioned on a periphery of the central hub. The axial groove receives the second end of the axial shaft. The central hub accommodates the electric motor. The blades direct air in an upward direction for facilitating propulsion of the apparatus. The second rotatable member comprises a bottom section of a generally circular shape and a curved side wall. The bottom section of the second rotatable member is defined between an inner periphery and an outer periphery. The curved side wall of the second rotatable member is connected to the outer periphery of the bottom section to define an annular space within the second rotatable member. The second rotatable member houses the impeller in an axial opening of a generally circular shape defined by the inner periphery of the bottom section.

Multiple vents are configured on the first rotatable member and on the second rotatable member for allowing air to pass through the first rotatable member and the second rotatable member respectively. The rotating impeller generates a flow of air at an increased velocity. This generates a lifting force that propels the apparatus in an upward direction. The air-flow is directed to the rotating photovoltaic cells on the first rotatable member. The air flows out of the apparatus through the vents configured on the first rotatable member. The photovoltaic cells on the first rotatable member are cooled by the air-flow which enables the photovoltaic cells to operate at a lower temperature.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing summary, as well as the following detailed description of the invention, is better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, exemplary constructions of the invention are shown in the drawings. However, the invention is not limited to the specific methods and instrumentalities disclosed herein.

FIG. 1 exemplarily illustrates a top perspective view of an apparatus that operates at a lower temperature.

FIG. 2 exemplarily illustrates a top orthogonal view of a first rotatable member of the apparatus.

FIG. 3 exemplarily illustrates a bottom orthogonal view of the first rotatable member of the apparatus.

FIG. 4 exemplarily illustrates an exploded view of the apparatus.

FIGS. 5-6 exemplarily illustrate an axial shaft of the electric motor inserted into an axial groove of an impeller provided on a second rotatable member of the apparatus.

FIG. 7 exemplarily illustrates a top orthogonal view of the second rotatable member of the apparatus.

FIG. 8 exemplarily illustrates a bottom orthogonal view of the second rotatable member of the apparatus.

FIG. 9 exemplarily illustrates a sectional view of the apparatus.

FIG. 10 exemplarily illustrates a top perspective view of the apparatus, showing mounting of concentrator lenses on the photovoltaic cells.

FIG. 11 exemplarily illustrates a top perspective view of the first rotatable member of the apparatus, showing an embodiment of positioning the photovoltaic cells on the first rotatable member.

FIG. 12 exemplarily illustrates a top orthogonal view of the first rotatable member of the apparatus, showing an embodiment of positioning the photovoltaic cells on the first rotatable member.

FIG. 13 exemplarily illustrates an exploded view of an embodiment of the apparatus.

FIGS. 14-15 exemplarily illustrate an exploded view of the apparatus, showing the rotation of the first rotatable member and the second rotatable member about a central axis.

FIG. 16 exemplarily illustrates the operation of the apparatus.

FIG. 17 illustrates a method of operating photovoltaic cells at a lower temperature.

FIG. 18 exemplarily illustrates a sectional view of the apparatus showing engagement of protrusions on the upper surface of the electric motor in the slots on the underside of the photovoltaic cells.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 exemplarily illustrates a top perspective view of an apparatus **100** that operates at a lower temperature and thereby increases the photovoltaic cell solar energy conversion efficiency. The apparatus **100** disclosed herein comprises photovoltaic cells **105**, a first rotatable member **101**, and a second rotatable member **107**. The photovoltaic cells **105** are provided on the first rotatable member **101**. The photovoltaic cells **105** capture solar energy and convert the solar energy into electrical energy by the photovoltaic effect. The photovoltaic cell **105** is made out of a semiconductor material. When a photon is absorbed by the photovoltaic cell **105**, electrons from the atoms of the semiconductor material are dislodged from their position. These electrons travel toward the front surface of the photovoltaic cell **105** and flow on the front surface of the photovoltaic cell **105**. This flow of electrons generates electrical energy.

The electrical energy is transferred to an electric motor **110** provided with an axial shaft **112** as exemplarily illustrated in FIGS. 3-5. The electric motor **110** is, for example, a direct current (DC) motor. The axial shaft **112** is powered by the electric motor **110**. The electric motor **110** is in electric communication with the photovoltaic cells **105** for powering the electric motor **110**. The axial shaft **112** extends axially from the electric motor **110** to an impeller **113** as exemplarily illustrated in FIG. 4. The impeller **113** is coaxially connected to the axial shaft **112** as exemplarily illustrated in FIG. 5. The electric motor **110** converts the electrical energy produced by the photovoltaic cells **105** into mechanical energy for rotating the photovoltaic cells **105** in a first direction, for example, a clockwise direction of rotation, about a central axis **115**. The rotation of the axial shaft **112** by the electric motor **110** rotates the second rotatable member **107** via the impeller **113** in a second direction counter to the first direction about the central axis **115**. For example, the electric motor **110** rotates the photovoltaic cells **105** provided on the first rotatable member **101**

5

in a clockwise direction about the central axis **115** and rotates the axial shaft **112** connected to the second rotatable member **107** via the impeller **113** in a counterclockwise direction about the central axis **115**.

Rotation of the axial shaft **112** in the electric motor **110** generates a counter force which in turn rotates components of the electric motor **110** other than the axial shaft **112** in a direction counter to the direction of the axial shaft **112**. The counter force is called "counter torque effect". Counter torque effect is a rotational force that opposes the direction of rotation of the axial shaft **112**. In this case, the rotational force is the rotation of the electric motor **110** in a direction opposite to the direction of the axial shaft **112**. To avoid any loss in transfer of rotational energy imparted by the electric energy to the axial shaft **112**, the electric motor **110** is almost always rigidly fixed. In an embodiment of the apparatus **100** disclosed herein, the axial shaft **112** is connected to the impeller **113** on the second rotatable member **107**, wherein the axial shaft **112** is protruding from one end **110b** of the electric motor **110**. The opposing end **110a** of the electric motor **110** without the protruding axial shaft **112** is rigidly connected to the photovoltaic cells **105**. Accordingly, when the electrical energy is transferred to the electric motor **110** from the photovoltaic cells **105**, the axial shaft **112** rotates in one direction, causing the rigidly connected impeller **113** on the second rotatable member **107** to rotate in the same direction as that of the axial shaft **112**. The counter force generated by the rotation of the axial shaft **112** causes the electric motor **110** and the photovoltaic cells **105** connected to the electric motor **110** to rotate in a direction opposite to the direction of rotation of the axial shaft **112**.

The rotating axial shaft **112** rotates the impeller **113** provided on the second rotatable member **107** at high revolutions per minute (rpm) which generates a flow of air. As used herein, high rpm refers to speed of rotation faster than 1 revolution per minute, for example, in a range of 1-1000 revolutions per minute. The air-flow generated by the impeller **113** is directed to the rotating photovoltaic cells **105** on the first rotatable member **101**. The photovoltaic cells **105** on the first rotatable member **101** are therefore cooled by the ambient air as the photovoltaic cells **105** rotate and are also cooled by the air-flow generated by the rotating impeller **113** and directed towards and past the rotating photovoltaic cells **105** and therefore operate at a lower temperature.

In an embodiment, the apparatus **100** disclosed is not provided with the second rotatable member **107**. In this embodiment, the impeller **113** is positioned below and in close proximity to the photovoltaic cells **105** and is rotated by a second motor in communication with the impeller **113** that is powered by the photovoltaic cells **105**. The rotation of the impeller **113** by the second motor generates air-flow that is directed towards and past the photovoltaic cells **105**.

Due to the lowered temperature of the photovoltaic cells **105**, an increased number of photons from the solar energy are absorbed by the photovoltaic cells **105**, thereby dislodging an increased number of electrons from the atoms of the semiconductor material. These electrons then flow toward the front surface of the photovoltaic cells **105**. The lowered operating temperature of the photovoltaic cells **105** facilitates better flow of electrons on the front surface of the photovoltaic cells **105**, thereby increasing the amount of electrical energy output of the photovoltaic cells **105**.

As illustrated in FIGS. 1-2, the first rotatable member **101** is, for example, a generally disc-shaped rotatable member. The first rotatable member **101** comprises an upper section **102** of a generally circular shape, a curved side wall **103**, and

6

an axial opening **104** of a generally circular shape. The upper section **102** is defined between an inner periphery **102a** and an outer periphery **102b**. A top orthogonal view of the first rotatable member **101** of the apparatus **100** is exemplarily illustrated in FIG. 2.

The curved side wall **103** of the first rotatable member **101** is connected to the outer periphery **102b** of the upper section **102** to define an annular space **114** within the first rotatable member **101**, as exemplarily illustrated in FIG. 4. The axial opening **104** of the first rotatable member **101** is defined by the inner periphery **102a** of the upper section **102** for housing the photovoltaic cells **105**.

The photovoltaic cells **105** are positioned within the axial opening **104** of the first rotatable member **101** and on the upper section **102** of the first rotatable member **101**. In an embodiment, the photovoltaic cells **105** are positioned on a plane or a member that has a shape other than a circular shape, for example, an oval shaped member. In another embodiment, the photovoltaic cells **105** are provided on a generally circular panel **105** positioned in the axial opening **104** defined by the inner periphery **102a** of the upper section **102** of the first rotatable member **101** as exemplarily illustrated in FIGS. 1-2. In another embodiment, the photovoltaic cells **105** are provided on a ring shaped panel **119** and on multiple rectangular panels **120** as disclosed in the detailed description of FIGS. 11-13.

FIG. 3 exemplarily illustrates a bottom orthogonal view of the first rotatable member **101** of the apparatus **100**. As illustrated in FIG. 3, the electric motor **110** provided with the axial shaft **112** is connected to the first rotatable member **101** that houses the photovoltaic cells **105** positioned within the axial opening **104** of the first rotatable member **101**. The electric motor **110** is in electric communication with the photovoltaic cells **105**. The photovoltaic cells **105** transfer the electrical energy to the electric motor **110**. The electrical connection allows flow of electrical energy from the photovoltaic cells **105** into the electric motor **110**. The electric motor **110** converts the electrical energy produced by the photovoltaic cells **105** into mechanical energy. The electric motor **110** is coaxially disposed in the annular space **114** defined by the first rotatable member **101** as exemplarily illustrated in FIG. 4. The electric motor **110** rotates the axial shaft **112** about the central axis **115**. The direction of rotation can be reversed by reversing the leads **111** connected to the electric motor terminals **110c** as illustrated in FIGS. 3-4. The electric motor terminals **110c** are, for example, a positive terminal and a negative terminal.

As illustrated in FIGS. 1-3, the apparatus **100** further comprises multiple vents **106a** configured on the first rotatable member **101**. The vents **106a** allow the airflow generated by the impeller **113** to pass through the first rotatable member **101** for cooling the photovoltaic cells **105** on the first rotatable member **101**. The vents **106a** on the upper section **102** of the first rotatable member **101** allow the air to flow out into the atmosphere.

FIG. 4 exemplarily illustrates an exploded view of the apparatus **100**, showing the connection of the axial shaft **112** to the electric motor **110**. The axial shaft **112** is, for example, a drive shaft. The axial shaft **112** connects the electric motor **110** to the impeller **113** housed in the second rotatable member **107**. The axial shaft **112** rotates the impeller **113** about the central axis **115**. The axial shaft **112** has a first end **112b** and a second end **112a**. The first end **112b** of the axial shaft **112** is rotatably connected within the electric motor **110**. The second end **112a** of the axial shaft **112** is connected to the impeller **113**. The impeller **113** comprises a central hub **113b**, an axial groove **113a** axially positioned in the

7

central hub **113b**, and multiple blades **113d** positioned on a periphery **113c** of the central hub **113b**. The axial groove **113a** receives the second end **112a** of the axial shaft **112**. The central hub **113b** accommodates the electric motor **110**. When the impeller **113** is rotated by the electric motor **110** via the axial shaft **112**, the blades **113d** of the impeller **113** generate an air-flow using the air present within the apparatus **100**, and direct the air-flow in an upward direction towards and past the rotating photovoltaic cells **105** on the first rotatable member **101** for facilitating cooling of the rotating photovoltaic cells **105**.

FIG. 4 also illustrates protrusions **110d** on the upper surface **110a** of the electric motor **110**. The protrusions **110d** are located adjacent to the electric motor terminals **110c**.

FIGS. 5-6 exemplarily illustrate an axial shaft **112** of the electric motor **110** inserted into an axial groove **113a** of an impeller **113** provided on a second rotatable member **107** of the apparatus **100**. The second end **112a** of the axial shaft **112** is inserted into the axial groove **113a** of the impeller **113** provided on the second rotatable member **107**. The electric motor **110** fits securely within the impeller **113** on the second rotatable member **107** of the apparatus **100** as illustrated in FIG. 6.

FIG. 7 exemplarily illustrates a top orthogonal view of the second rotatable member **107** of the apparatus **100**. The second rotatable member **107** is, for example, a generally disc-shaped rotatable member. The second rotatable member **107** comprises a bottom section **108** of a generally circular shape and a curved side wall **109**. The bottom section **108** is defined between an inner periphery **108a** and an outer periphery **108b**. As illustrated in FIGS. 5-6, the curved side wall **109** of the second rotatable member **107** is connected to the outer periphery **108b** of the bottom section **108** to define an annular space **116** within the second rotatable member **107**.

FIG. 8 exemplarily illustrates a bottom orthogonal view of the second rotatable member **107** of the apparatus **100**. As illustrated in FIG. 8, an axial opening **117** of a generally circular shape is defined by the inner periphery **108a** of the bottom section **108** of the second rotatable member **107**. The second rotatable member **107** houses the impeller **113** in the axial opening **117** of the second rotatable member **107**. The central hub **113b** of the impeller **113** is connected and rests within the axial opening **117** of the second rotatable member **107**. The impeller **113** rotates the second rotatable member **107** about the central axis **115** and generates a lifting force that propels the apparatus **100** in an upward direction on generation of air-flow by the rotating impeller **113**. The electric motor **110** causes the first rotatable member **101** on which the photovoltaic cells **105** are positioned to rotate in a first direction and the second rotatable member **107** and the impeller **113** on the second rotatable member **107** in a second direction counter to the first direction about the central axis **115**. The continuous rotation of the first rotatable member **101** housing the photovoltaic cells **105** and the impeller **113** in opposite directions at high rpm generates a high velocity air-flow which removes the heat generated in the photovoltaic cells **105** and minimizes heat build-up in the photovoltaic cells **105**.

As illustrated in FIGS. 5-8, the apparatus **100** further comprises multiple vents **106b** configured on the bottom section **108** of the second rotatable member **107**. The vents **106b** configured on the bottom section **108** of the second rotatable member **107** allow air to pass through the second rotatable member **107**.

As disclosed in the detailed description of FIGS. 1-3, the electric motor **110** is connected to the first rotatable member

8

101 that houses the photovoltaic cells **105** positioned within the axial opening **104**. The electric motor **110** is provided with an axial shaft **112**. The first end **112b** of the axial shaft **112** is connected to the electric motor **110** and the second end **112a** of the axial shaft **112** extends down to the impeller **113** and terminates in the axial groove **113a** of the impeller **113**. The impeller **113** is rigidly connected to the second rotatable member **107**, and therefore the rotation of the impeller **113** also rotates the second rotatable member **107**.

When the apparatus **100** is placed on a surface, for example a person's hand with the second rotatable member **107** of the apparatus **100** resting on the person's hand and exposed to sun light, the photovoltaic cells **105** on the first rotatable member **101** transfers electric energy to the electric motor **110**. When the electrical energy produced by the photovoltaic cells **105** is transferred to the electric motor **110**, the electric motor **110** rotates about the axial shaft **112** in one direction about the axis of the axial shaft **112**. The electric motor **110** thereby rotates the photovoltaic cells **105** provided on the first rotatable member **101** in a first direction, for example, a clockwise direction, about the central axis **115**. Since the rotational force of the electric motor **110** takes the path of least resistance, the electric motor **110** rotates the first rotatable member **101** but does not rotate the impeller **113** housed on the second rotatable member **107** resting on the person's hand. When the apparatus **100** is released from the person's hand into the air, the second rotatable member **107** is no longer restrained and the rotational force of the axial shaft **112** rotates the impeller **113** connected to the second rotatable member **107** and therefore rotates the second rotatable member **107** about the central axis **115**. When the apparatus **100** is released into the air, the first rotatable member **101** housing the photovoltaic cells **105** rotates in a first direction, for example, a clockwise direction, and the second rotatable member **107** rotates in a second direction, for example, a counterclockwise direction, about the central axis **115**.

FIG. 9 exemplarily illustrates a sectional view of the apparatus **100**. As illustrated in FIG. 9, the first rotatable member **101** which houses the photovoltaic cells **105** is connected to the electric motor **110** which is provided with the axial shaft **112**. The axial groove **113a** of the impeller **113** receives the second end **112a** of the axial shaft **112** and allows the electric motor **110** disposed within the annular space **114** of the first rotatable member **101** to securely fit within the impeller **113** provided on the second rotatable member **107**. The electric motor **110** converts the electrical energy produced by the photovoltaic cells **105** into mechanical energy for rotating the photovoltaic cells **105** about a central axis **115** and rotating the axial shaft **112** connected to impeller **113** on the second rotatable member **107** in opposite directions about the central axis **115**. The impeller **113** rotating at high rpm generates high velocity air-flow. The high velocity air-flow is directed towards the first rotatable member **101** by the blades **113d** of the impeller **113**. The air flows past the rotating photovoltaic cells **105**. The flow of the air past the rotating photovoltaic cells **105** further lowers the temperature of the photovoltaic cells **105** by removing heat generated in the photovoltaic cells **105** and minimizing heat build-up in the photovoltaic cells **105**. This prevents over heating of the photovoltaic cells **105**.

FIG. 10 exemplarily illustrates a top perspective view of the apparatus **100**, showing the mounting of concentrator lenses **118** on the photovoltaic cells **105**. In an embodiment, multiple concentrator lenses **118**, for example, Fresnel lenses are mounted on the photovoltaic cells **105**. The concentrator lenses **118** concentrate and direct the solar

energy into the photovoltaic cells **105** for increasing the amount of electrical energy output of the photovoltaic cells **105**.

FIG. **11** exemplarily illustrates a top perspective view of the first rotatable member **101** of the apparatus **100**, showing an embodiment of positioning the photovoltaic cells **105** on the first rotatable member **101**. In this embodiment, the photovoltaic cells **105** are provided on a ring shaped panel **119** and on multiple rectangular panels **120**. FIGS. **11-13** exemplarily illustrate three radially positioned rectangular panels **120**. The ring shaped panel **119** is positioned on the upper section **102** of the first rotatable member **101**. Each of the rectangular panels **120** has a first end **120a** and a second end **120b**. The first end **120a** of each of the rectangular panels **120** is electrically connected to the upper surface **110a** of the electric motor **110**. The second end **120b** of each of the rectangular panels **120** is connected to the ring shaped panel **119**. A top orthogonal view of the first rotatable member **101** of the apparatus **100**, showing this embodiment of positioning the photovoltaic cells **105** on the first rotatable member **101** is exemplarily illustrated in FIG. **12**.

FIG. **13** exemplarily illustrates an exploded view of an embodiment of the apparatus **100**. In FIG. **13**, the photovoltaic cells **105** are positioned on the first rotatable member **101** as disclosed in the detailed description of FIGS. **11-12**. The panels **119** and **120** of photovoltaic cells **105** are connected to the upper surface **110a** of the electric motor **110** having the axial shaft **112**. The second end **112a** of the axial shaft **112** of the electric motor **110** is inserted in the axial groove **113a** of the impeller **113**.

FIGS. **14-15** exemplarily illustrate an exploded view of the apparatus **100**, showing the rotation of the first rotatable member **101** and the second rotatable member **107** about a central axis **115**. The photovoltaic cells **105** capture solar energy, convert the solar energy into electrical energy, and transfer the electrical energy to the electric motor **110**. The electric motor **110** converts the electrical energy into mechanical energy and rotates the photovoltaic cells **105** in a first direction about a central axis **115**, and rotates the axial shaft **112** connected to the second rotatable member **107** in a second direction counter to the first direction about the central axis **115**. The photovoltaic cells **105** also comprise slots **105a** on their backside, as exemplarily illustrated in FIG. **15**. The protrusions **110d** on the upper surface **110a** of the electric motor **110** are configured to be accommodated inside the slots **105a** to form a rigid connection between the photovoltaic cells **105** and the opposing end **110a** of the electric motor **110**. FIG. **18** exemplarily illustrates a sectional view of the apparatus **100** showing the accommodation of the protrusions **110d** inside the slots **105a** on the underside of the photovoltaic cells **105**. The number of slots **105a** on the backside of the photovoltaic cells **105** preferably corresponds to the number of protrusions **110d** on the upper surface **110a** of the electric motor **110**. FIGS. **4-6, 9, 14-16** and **18** exemplarily illustrate the presence of three slots **105a** and three protrusions **110d**.

FIG. **16** exemplarily illustrates the operation of the apparatus **100**. As disclosed in the detailed description of FIGS. **1-9**, the photovoltaic cells **105** provided on the first rotatable member **101** capture solar energy from sunlight and convert the solar energy to electrical energy which is transferred to the electric motor **110**. The electric motor **110** rotates about the axial shaft **112** in one direction about the axis of the axial shaft **112** and therefore rotates the photovoltaic cells **105**, for example, in a counterclockwise direction, about the central axis **115**. The electric motor **110** also rotates the axial shaft **112**, for example, in a clockwise direction and therefore

rotates the impeller **113** and the second rotatable member **107** in the clockwise direction. As exemplarily illustrated in FIG. **16**, the air from the atmosphere enters through the vents **106b** configured on the bottom section **108** of the second rotatable member **107**. The rotating impeller **113** generates the flow of the air and increases the velocity of air. The increased velocity air-flow is directed to the photovoltaic cells **105** on the first rotatable member **101** and flows through the vents **106a** on the upper section **102** of the first rotatable member **101**.

In an embodiment, an energy storage device (not shown), for example, a battery and a switch are provided in addition to the photovoltaic cells **105** in the apparatus **100**. As used herein, the term "switch" refers to an electrical component that can break an electrical circuit, interrupting the current or diverting it from one conductor to another. In the presence of sunlight, the switch may be configured to transfer the electrical energy obtained from the photovoltaic cells **105** to the electric motor **110** and also to the energy storage device thereby charging the energy storage device. In the absence of sunlight, the switch may be configured in such a way that the electrical energy stored in the charged energy storage device is transferred to the electric motor **110**.

FIG. **17** illustrates a method of operating photovoltaic cells **105** at a lower temperature. An apparatus **100** as illustrated and disclosed in the detailed description of FIGS. **1-16** is provided **1701**. The photovoltaic cells **105** capture **1702** solar energy and convert the captured solar energy into electrical energy. The photovoltaic cells **105** transfer **1703** the electrical energy to the electric motor **110**.

The electric motor **110** converts **1704** the electrical energy into mechanical energy and rotates **1705** photovoltaic cells **105** in a first direction, for example, a clockwise direction, about a central axis **115**. The rotation of the photovoltaic cells **105** in the first direction about the central axis **115** also rotates the first rotatable member **101** in the first direction about the central axis **115**.

Furthermore, the electric motor **110** rotates **1706** the axial shaft **112** connected to the impeller **113** in a second direction, for example, a counterclockwise direction, about the central axis **115**. The axial shaft **112** therefore rotates **1707** the impeller **113** in the second direction about the central axis **115**. The impeller **113** rotates the second rotatable member **107** in the second direction about the central axis **115**.

Air from the atmosphere enters through the vents **106b** into the apparatus **100** as exemplarily illustrated in FIG. **16**. The impeller **113** generates a high velocity air-flow. This generates a lifting force that propels the apparatus **100** in an upward direction. The impeller **113** directs **1708** the air-flow to the rotating photovoltaic cells **105** on the first rotatable member **101**. The air flows out of the apparatus **100** through the vents **106a** configured on the first rotatable member **101**. This cools the photovoltaic cells **105** and enables the photovoltaic cells **105** to operate at a lower temperature.

Consider an example where the apparatus **100** disclosed herein is used in a ventilation system. The photovoltaic cells **105** capture solar energy and convert the captured solar energy into electrical energy. The photovoltaic cells **105** then transfer the electrical energy to the electric motor **110** which converts the electrical energy into mechanical energy and rotates the photovoltaic cells **105** in a clockwise direction and the axial shaft **112** in a counterclockwise direction about the central axis **115**. The axial shaft **112** rotates the impeller **113** in the counterclockwise direction about the central axis **115** and the impeller **113** rotates the second rotatable member **107** in the counterclockwise direction about the central

11

axis **115**. The continuous rotation of the photovoltaic cells **105** at high rpm coupled with the upward flow of air generated by the rotating impeller **113** allows the photovoltaic cells **105** to operate at a lower temperature and increases the efficiency of the photovoltaic cells **105**.

The rotating impeller **113** absorbs spent air from within the room. The spent air from within the room flows into the apparatus **100** through the vents **106b** provided on the second rotatable member **107**. The rotating impeller **113** generates a high velocity air-flow of the spent air and discharges the air to the environment. The blades **113d** of the impeller **113** direct the absorbed spent air towards the first rotatable member **101**. The absorbed spent air flows past the photovoltaic cells **105** thereby lowering the temperature of the photovoltaic cells **105**. The absorbed spent air flows out of the apparatus **100** into the atmosphere through the vents **106a** provided on the first rotatable member **101**.

The apparatus **100** disclosed herein is used in several flying disc games. For example, the apparatus **100** may be used as a high speed rotatable flying device which is thrown and caught for recreation in games, for example, Frisbee throwing, etc.

The foregoing examples have been provided merely for the purpose of explanation and in no way are to be construed as limiting of the present invention. While the invention has been described with reference to various embodiments, it is understood that the words, which have been used herein, are words of description and illustration, rather than words of limitation. Additionally, although the invention has been described herein with reference to particular means, materials and embodiments, the invention is not intended to be limited to the particulars disclosed herein; rather, the invention extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims. It will be appreciated by those skilled in the art, having the benefit of the teachings of this specification, that changes could be made to the embodiments described above without departing from the broad inventive concept thereof. It is understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as defined by the appended claims.

We claim:

1. An apparatus for enabling photovoltaic cells to operate at a lower temperature, comprising:

said photovoltaic cells provided on a first rotatable member, wherein said photovoltaic cells capture solar energy and convert said solar energy into electrical energy, wherein said electrical energy is transferred to an electric motor having an axial shaft;

said electric motor rigidly connected to and in electric communication with said photovoltaic cells on a first side of said electric motor, wherein said electric motor is coaxially disposed in an annular space defined by said first rotatable member, wherein said axial shaft extends downwards from a second side of said electric motor opposite to said first side and is connected to an impeller, wherein said electric motor converts said electrical energy produced by said photovoltaic cells into mechanical energy for rotating said rigidly connected photovoltaic cells and said first rotatable member about a central axis in a first direction, and wherein said electric motor converts said electrical energy produced by said photovoltaic cells into said mechanical energy for rotating said axial shaft in a second direction counter to said first direction;

12

a second rotatable member rigidly connected to said impeller, wherein said rotating axial shaft rotates said impeller and said second rotatable member in said second direction; and

said first rotatable member and said second rotatable member comprising a plurality of vents, wherein said plurality of vents on said second rotatable member allow air to enter said apparatus from below said apparatus, wherein said impeller generates an air-flow, and wherein said air-flow reaches a top of said apparatus through said plurality of vents on said first rotatable member;

whereby said photovoltaic cells on said first rotatable member are cooled by said air-flow on top and bottom of said rotating photovoltaic cells, enabling said photovoltaic cells to operate at said lower temperature.

2. The apparatus of claim 1, wherein said first rotatable member comprises a generally circular upper section and a curved side wall, wherein said generally circular upper section is defined between an inner periphery and an outer periphery, wherein said curved side wall of said first rotatable member is connected to said outer periphery of said generally circular upper section to define said annular space within said first rotatable member, and wherein a generally circular axial opening is defined by said inner periphery of said generally circular upper section for housing said photovoltaic cells.

3. The apparatus of claim 2, wherein said photovoltaic cells are positioned within said generally circular axial opening and on said generally circular upper section of said first rotatable member.

4. The apparatus of claim 1, wherein said impeller comprises a central hub, wherein an axial groove is axially positioned in said central hub, wherein said axial groove receives said axial shaft, and wherein a plurality of blades are positioned on a periphery of said central hub.

5. The apparatus of claim 1, wherein said second rotatable member comprises a generally circular bottom section and a curved side wall, wherein said generally circular bottom section is defined between an inner periphery and an outer periphery, and wherein said curved side wall of said second rotatable member is connected to said outer periphery of said generally circular bottom section to define an annular space within said second rotatable member, and wherein a generally circular axial opening is defined by said inner periphery of said generally circular bottom section for housing said impeller.

6. The apparatus of claim 1, wherein one or more concentrator lenses are mounted on said photovoltaic cells for concentrating and directing said solar energy into said photovoltaic cells, and wherein said photovoltaic cells are provided on a generally circular panel positioned on said first rotatable member.

7. A method of operating photovoltaic cells at a lower temperature, comprising:

providing an apparatus comprising:

said photovoltaic cells provided on a first rotatable member;

an electric motor rigidly connected to and in electric communication with said photovoltaic cells on a first side of said electric motor, wherein said electric motor is coaxially disposed in an annular space defined by said first rotatable member;

said electric motor having an axial shaft that extends from a second side of said electric motor opposite to said first side to an impeller;

13

said impeller coaxially connected to said axial shaft;
and
said impeller housed on a second rotatable member;
capturing solar energy by said photovoltaic cells and
converting said captured solar energy into electrical
energy, wherein said electrical energy is transferred to
said electric motor;
converting said electrical energy into mechanical energy
by said electric motor for rotating said first rotatable
member and said photovoltaic cells housed on said first
rotatable member in a first direction about a central
axis, and for rotating said axial shaft and said impeller
housed on said second rotatable member in a second
direction counter to said first direction about said
central axis; and
said impeller inside said apparatus receiving air from
below said apparatus through a plurality of vents in said
second rotatable member, said impeller generating an
air-flow, wherein said air-flow reaches a top of said
apparatus through a plurality of vents in said first
rotatable member;
whereby said photovoltaic cells on said first rotatable
member are cooled by said air-flow on top and bottom
of said rotating photovoltaic cells, enabling said pho-
tovoltaic cells to operate at said lower temperature.
8. An apparatus for enabling photovoltaic cells to operate
at a lower temperature, comprising:
a first rotatable member, said first rotatable member
comprising a generally circular upper section and a
curved side wall, wherein said generally circular upper
section is defined between an inner periphery and an
outer periphery, wherein said curved side wall of said
first rotatable member is connected to said outer periph-
ery of said generally circular upper section to define an
annular space within said first rotatable member,
wherein said inner periphery of said generally circular
upper section defines a generally circular axial opening;
said photovoltaic cells positioned within said generally
circular axial opening and on said generally circular
upper section of said first rotatable member, wherein

14

said photovoltaic cells capture solar energy and convert
said solar energy into electrical energy, wherein said
electrical energy is transferred to an electric motor
having an axial shaft;
said electric motor rigidly connected to and in electric
communication with said photovoltaic cells on a first
side of said electric motor, wherein said electric motor
is coaxially disposed in said annular space defined by
said first rotatable member, wherein said axial shaft
extends downwards from a second side of said electric
motor opposite to said first side and is connected to an
impeller, wherein said electric motor converts said
electrical energy produced by said photovoltaic cells
into mechanical energy for rotating said rigidly con-
nected photovoltaic cells and said first rotatable mem-
ber about a central axis in a first direction, and wherein
said electric motor converts said electrical energy pro-
duced by said photovoltaic cells into said mechanical
energy for rotating said axial shaft in a second direction
counter to said first direction; and
a second rotatable member rigidly connected to said
impeller, wherein said rotating axial shaft rotates said
impeller and said second rotatable member in said
second direction at high revolutions per minute;
said first rotatable member and said second rotatable
member comprising a plurality of vents, wherein said
plurality of vents on said second rotatable member
allow air to enter said apparatus from below said
apparatus, wherein said impeller generates an air-flow
using air present within said apparatus and directs said
air-flow towards said rotating photovoltaic cells, and
wherein said air-flow reaches a top of said apparatus
through said plurality of vents on said first rotatable
member;
whereby said photovoltaic cells on said first rotatable
member are cooled by said air-flow on top and bottom
of said rotating photovoltaic cells, enabling said pho-
tovoltaic cells to operate at said lower temperature.

* * * * *