

(12) **Patent Application Publication**
Chun et al.

(43) **Pub. Date:** **Apr. 20, 2017**

CPC ***A61C 7/16*** (2013.01); ***A61C 7/06***
(2013.01); ***A61C 7/08*** (2013.01); ***A61C 7/145***
(2013.01); ***A61C 7/20*** (2013.01); ***A61C 7/10***
(2013.01)

(57)


(22) Filed: **Oct. 19, 2016**

(60) Provisional application No. 62/243,672, filed on Oct. 20, 2015.

(51) **Int. Cl.**

A61C 7/14 (2006.01)

A detachable orthodontic bracket and wire system includes bracket bases, brackets, and an arch wire for guiding alignment of teeth. The bracket bases are positioned on a lingual surface and/or a facial surface of the teeth. Each bracket base includes a first surface, a second surface, and at least one first interlocking element. The first surface is rigidly attached to the lingual surface and/or the facial surface of the teeth. The second surface opposes the lingual surface and/or the facial surface of the teeth. The first interlocking element is attached to and positioned in a direction substantially perpendicular to or parallel to the second surface of each bracket base. The brackets include at least second interlocking element that interlocks with the first interlocking element. The arch wire is inserted through a slot channel of each bracket. The bracket and the arch wire are infused and rigidly anchored within enclosing layers.

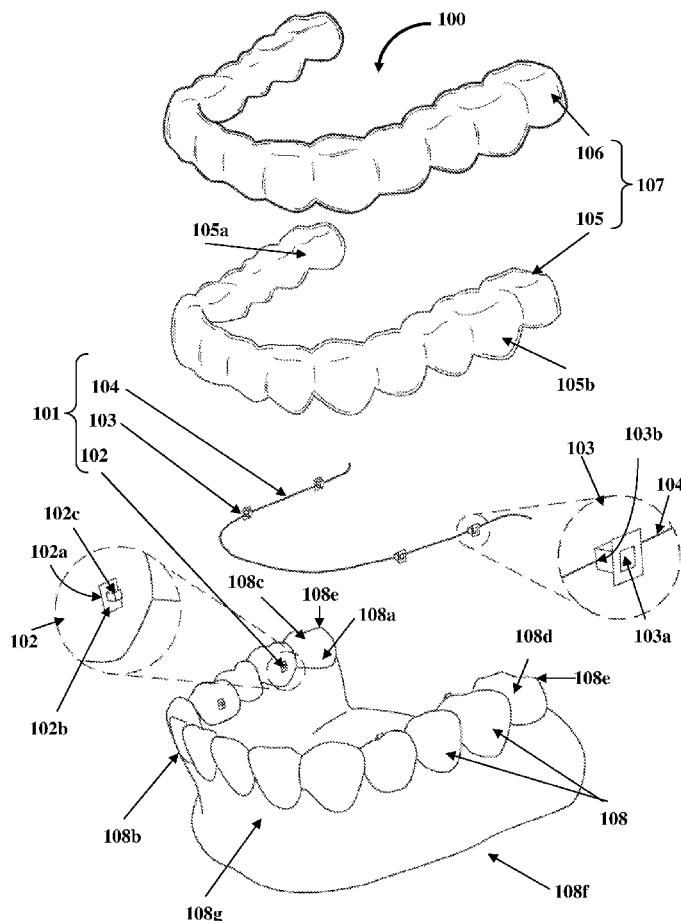

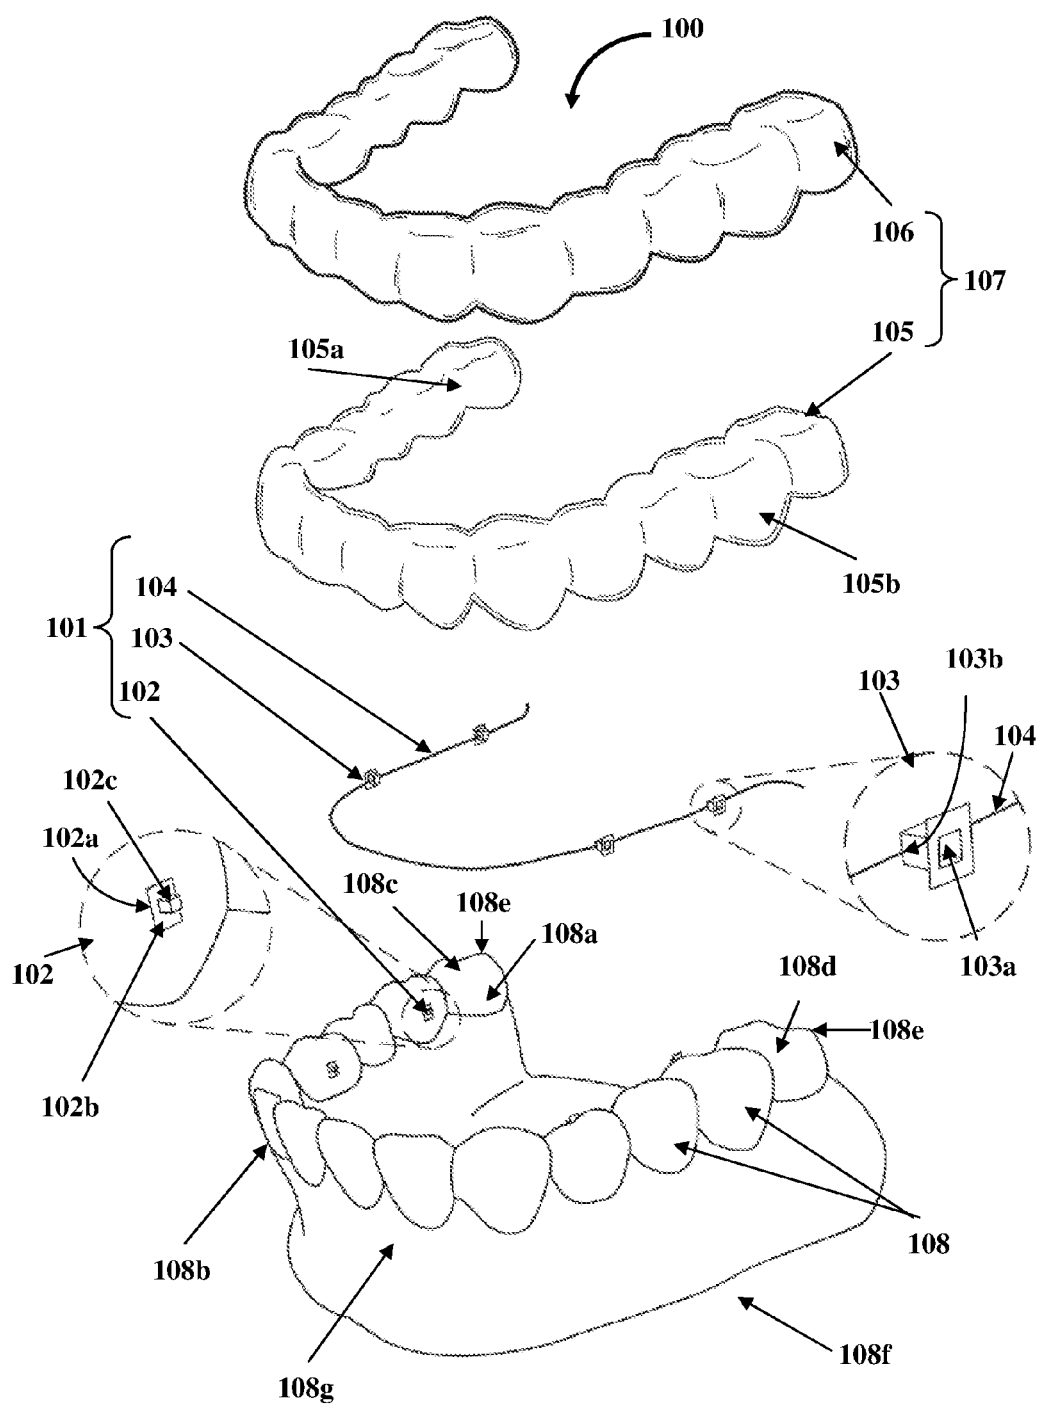


FIG. 1

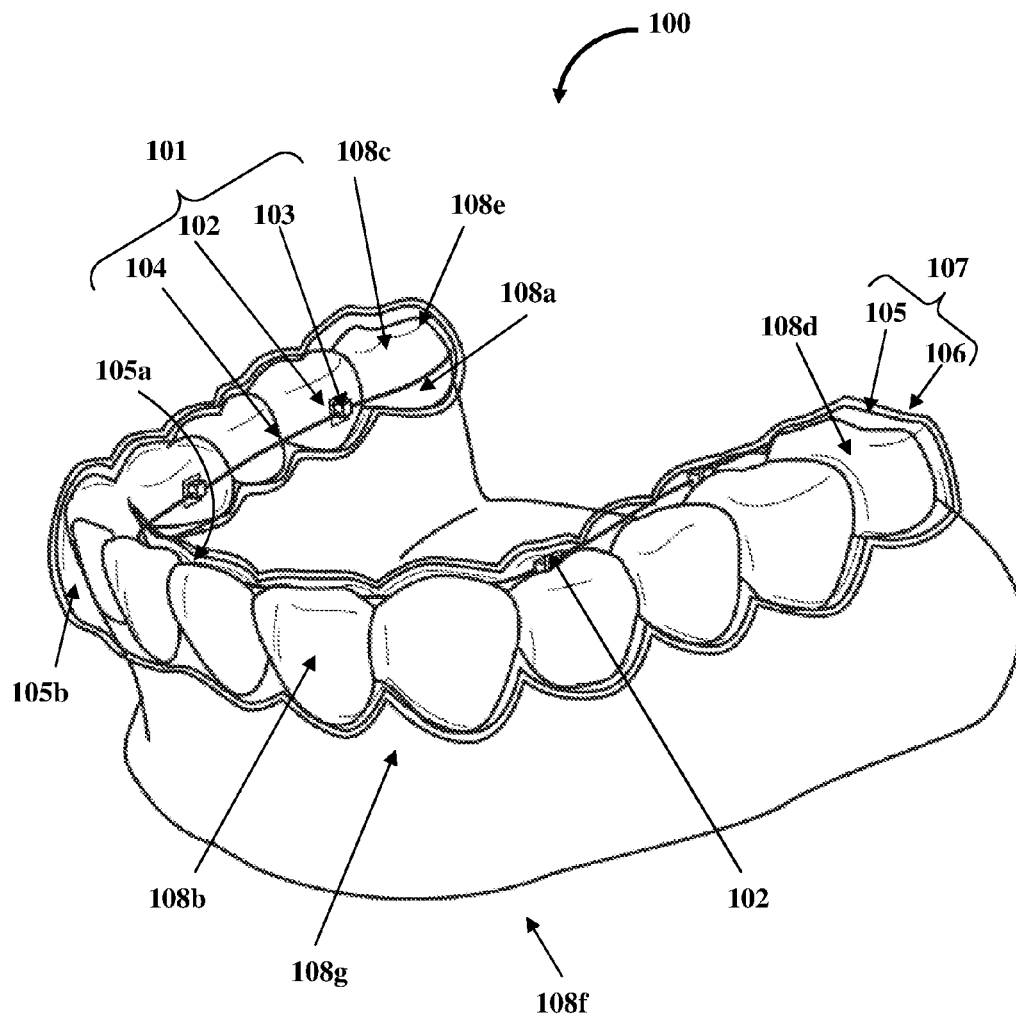


FIG. 2

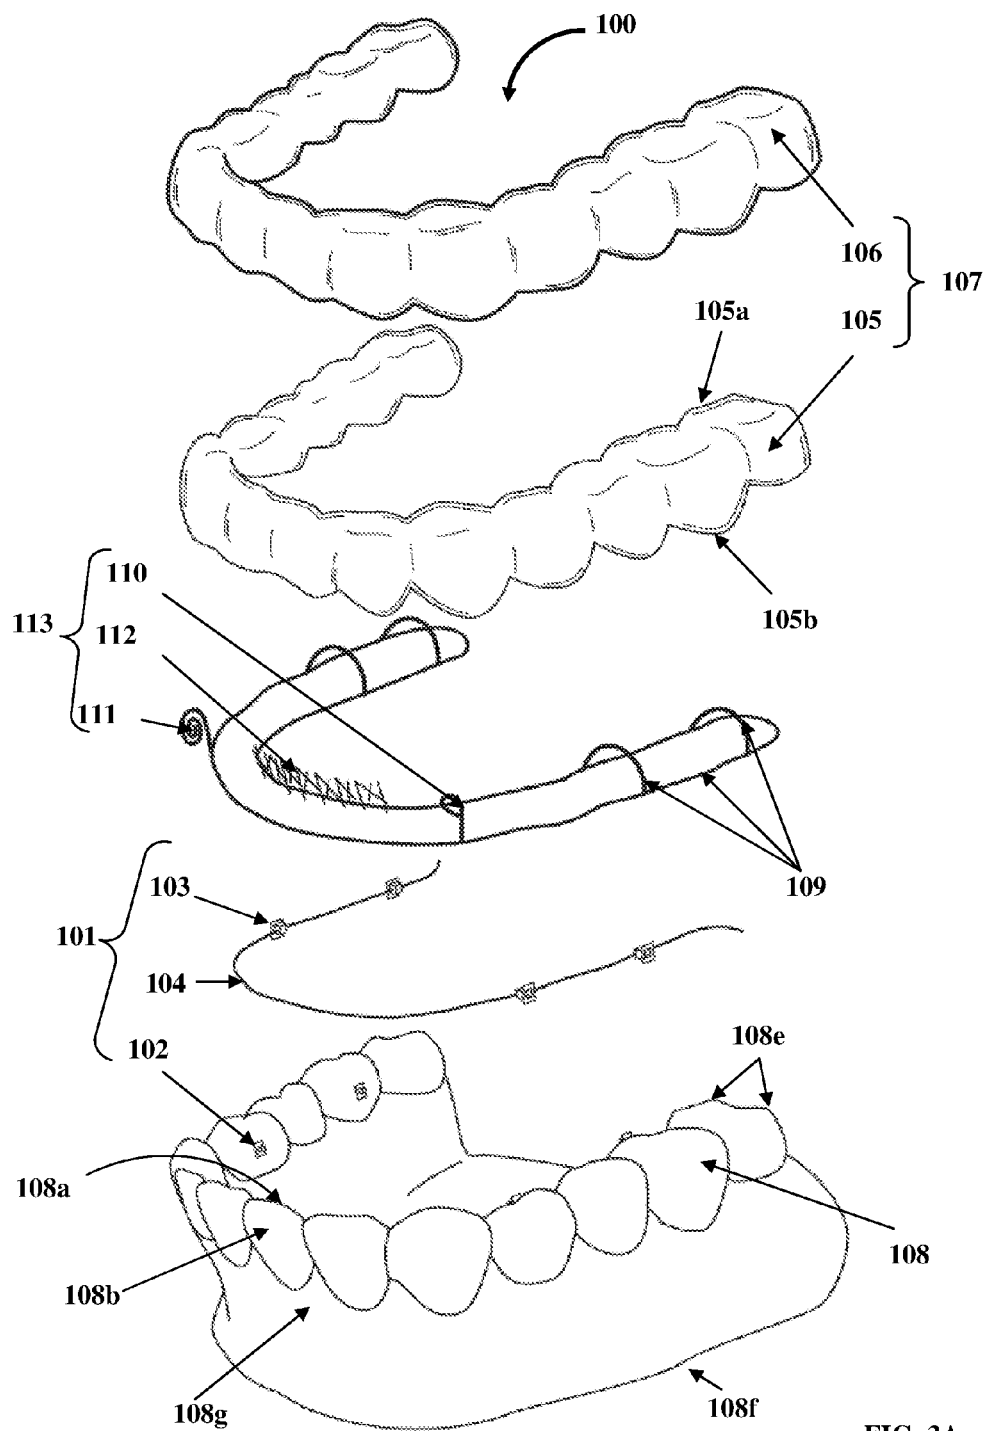


FIG. 3A

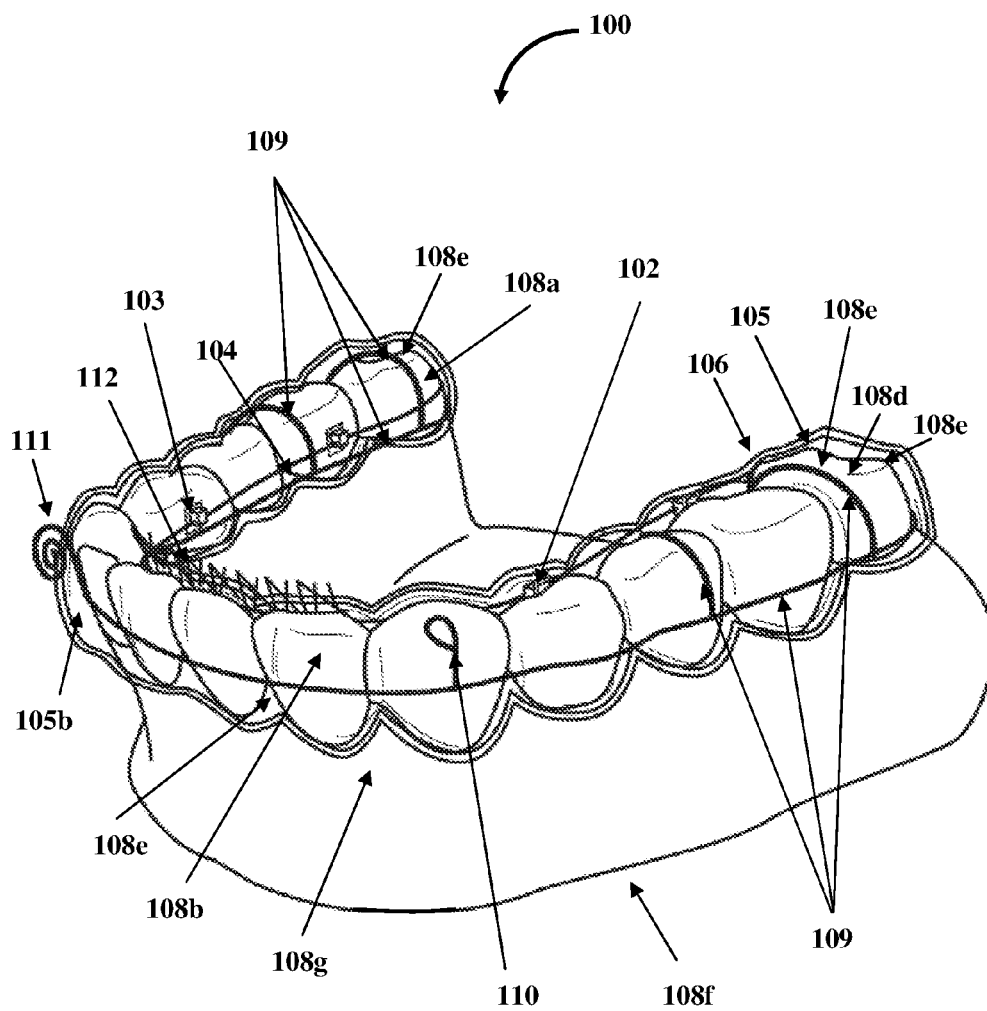


FIG. 3B

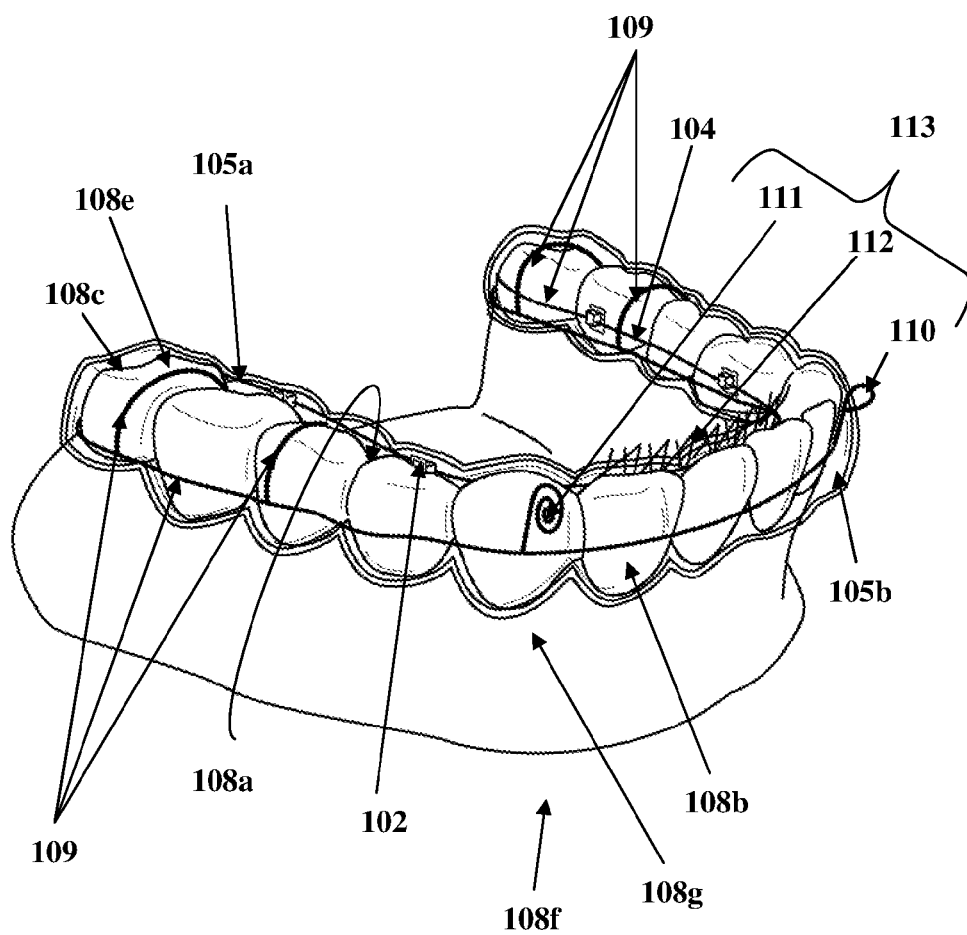


FIG. 3C

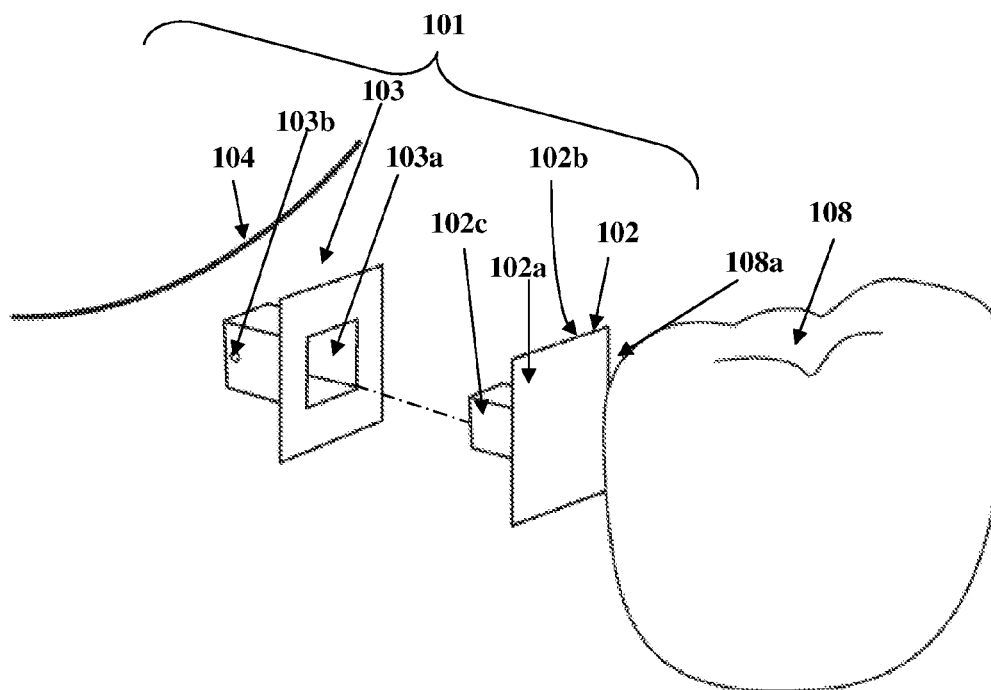


FIG. 4A

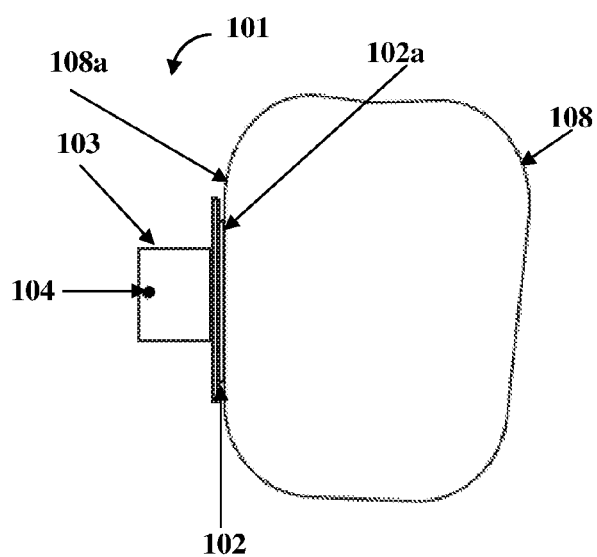


FIG. 4B

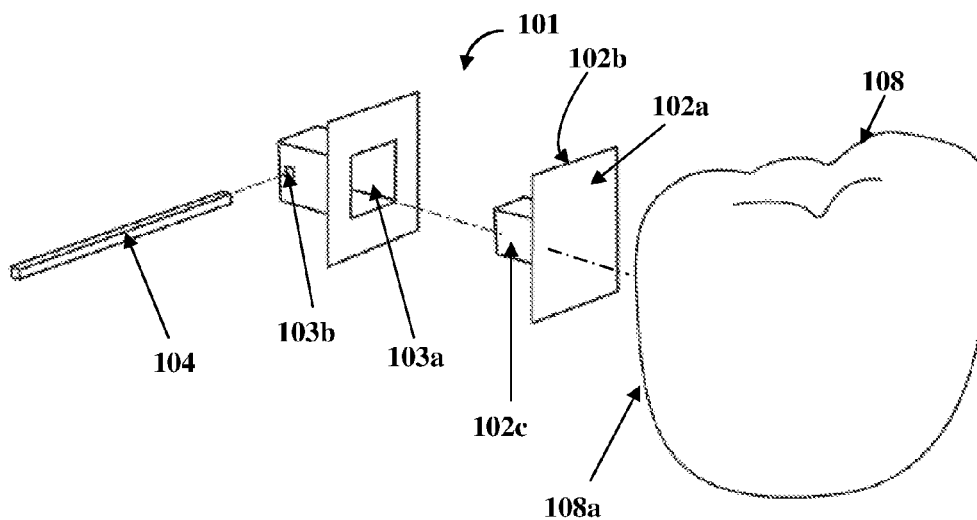


FIG. 4C

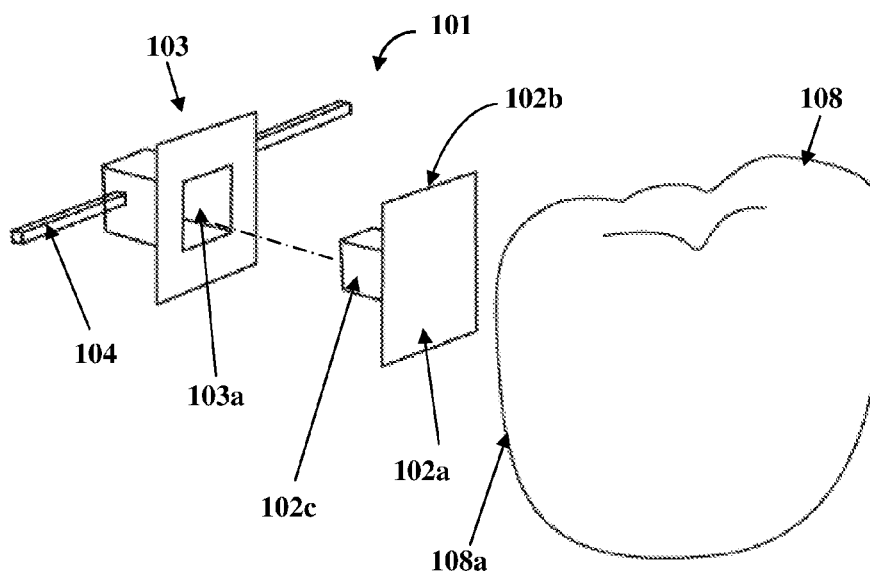


FIG. 4D

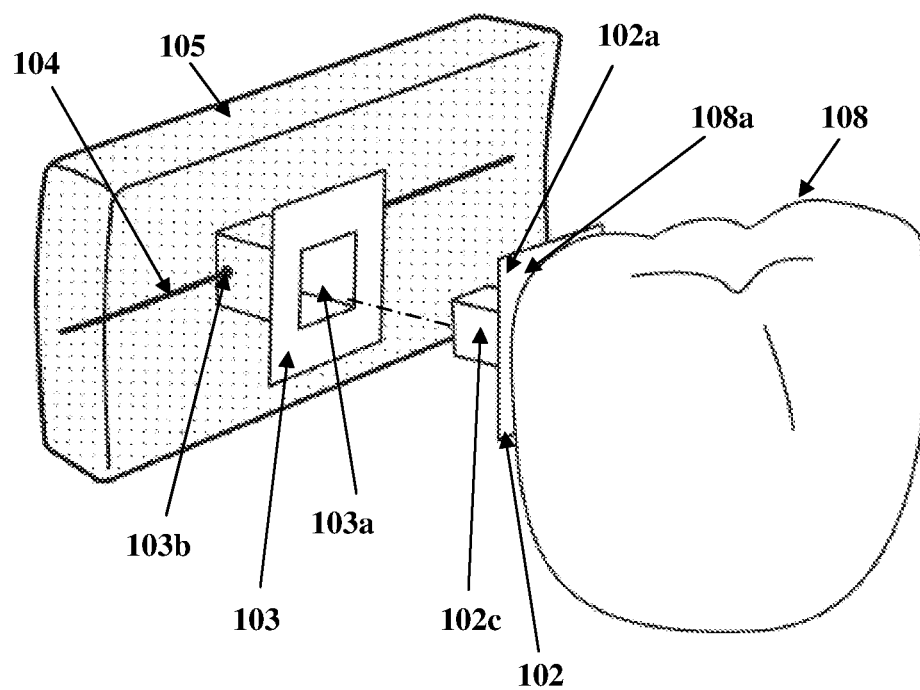


FIG. 5A

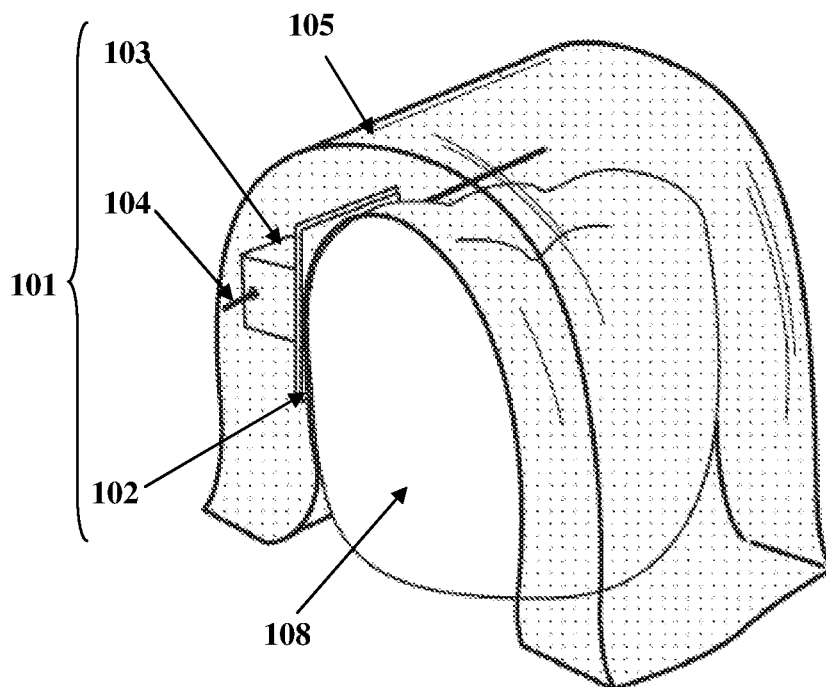


FIG. 5B

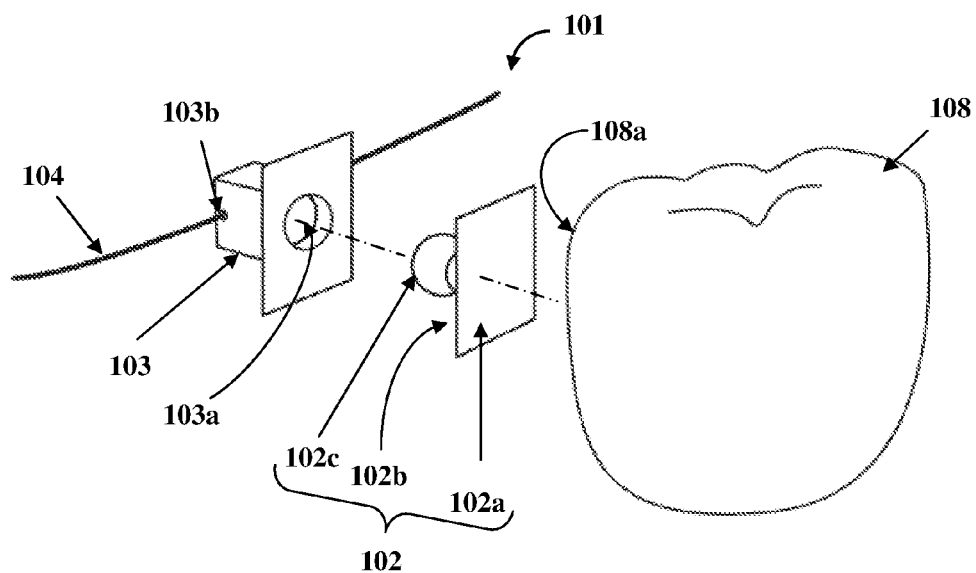


FIG. 6A

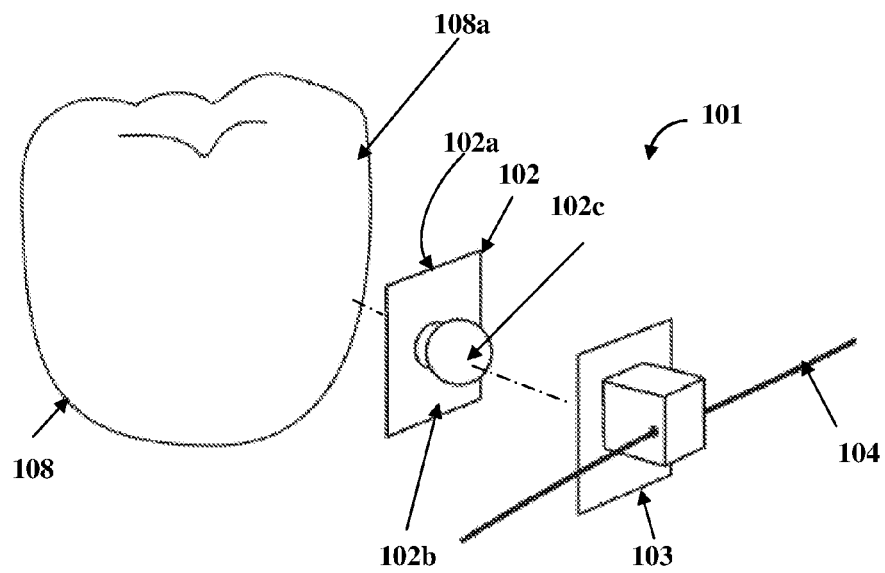


FIG. 6B

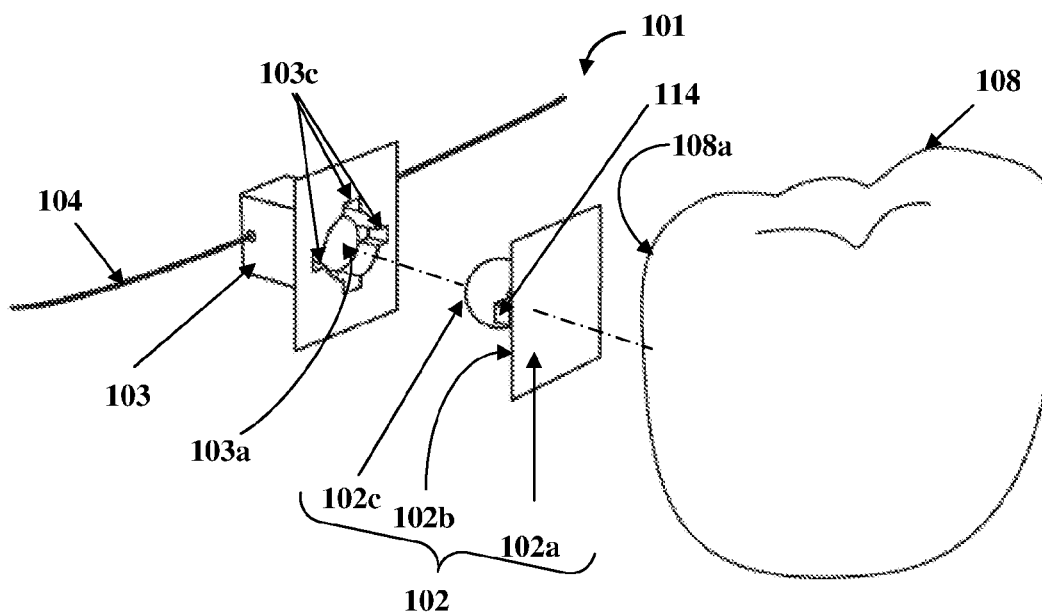


FIG. 7A

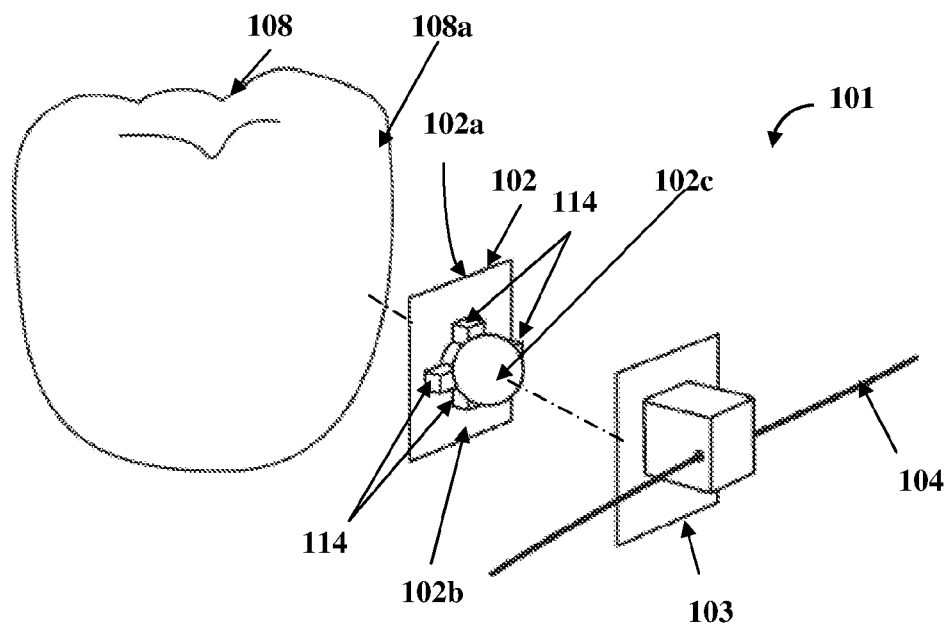


FIG. 7B

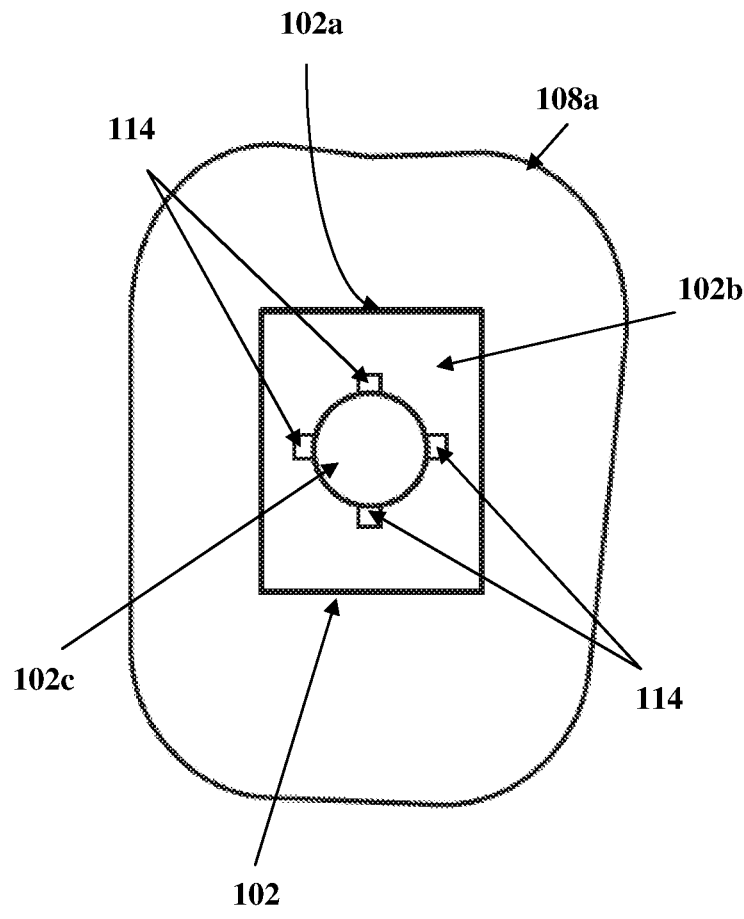


FIG. 7C

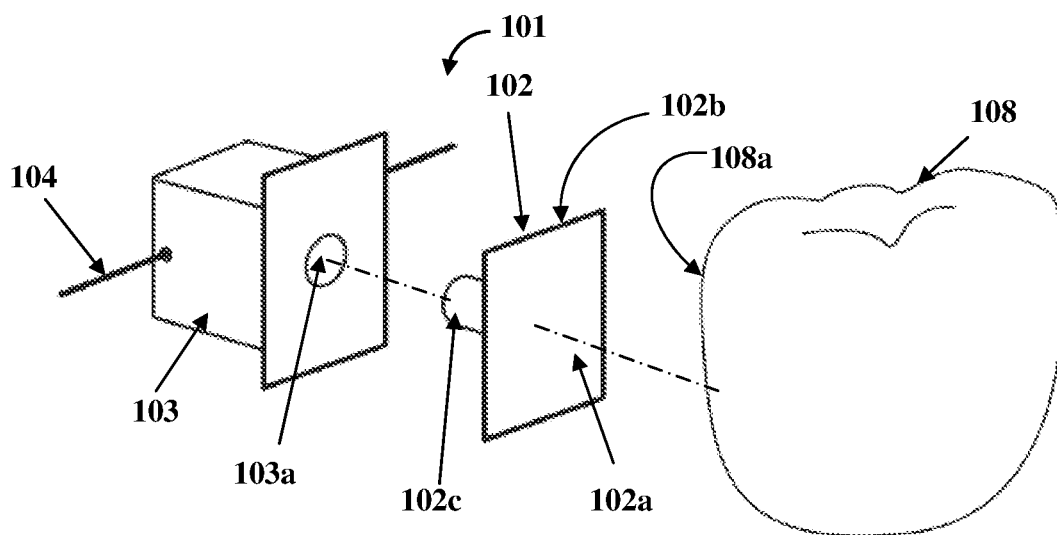


FIG. 8A

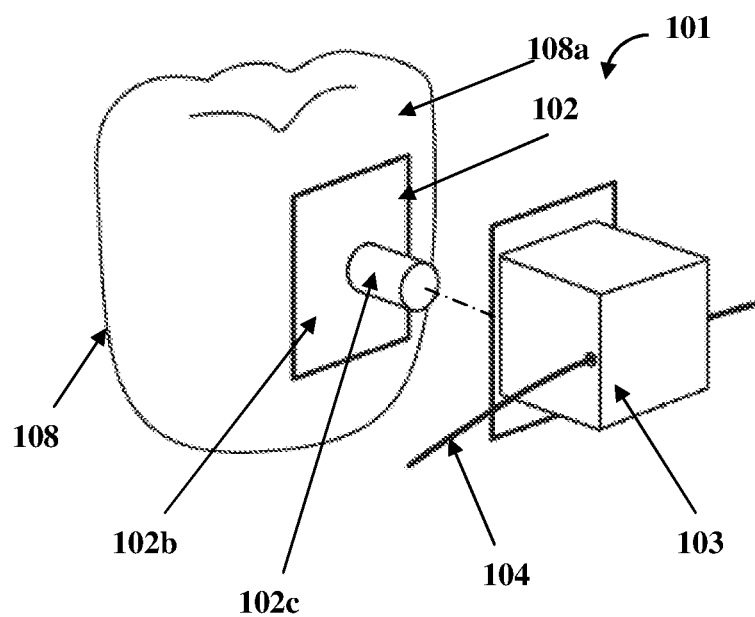


FIG. 8B

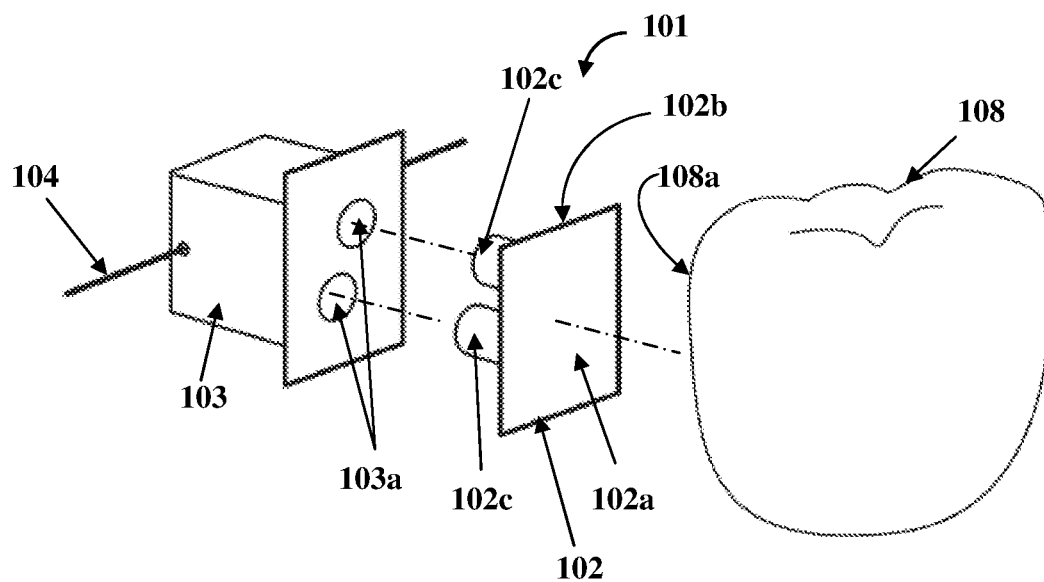


FIG. 9A

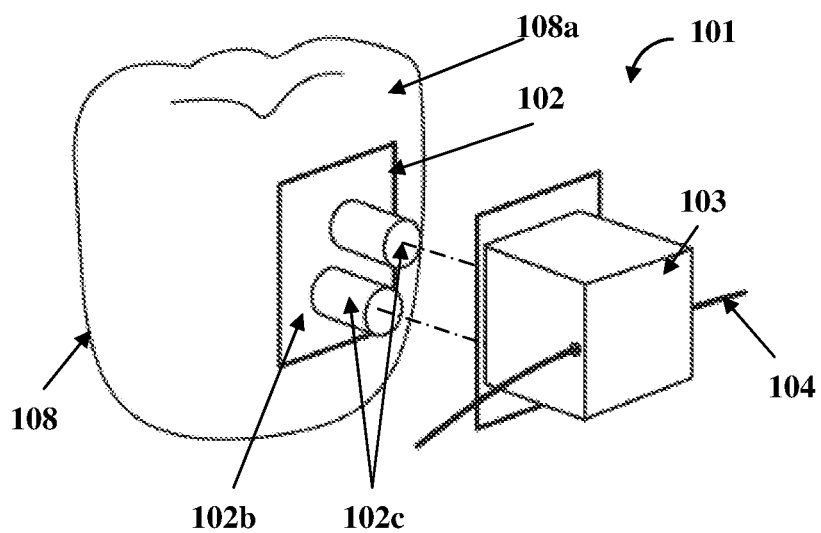


FIG. 9B

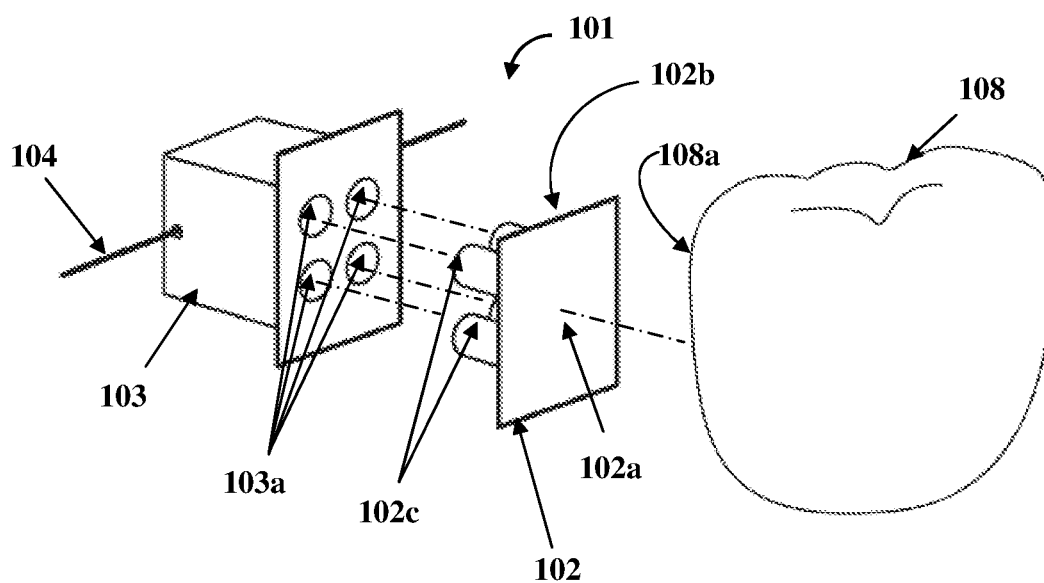


FIG. 10A

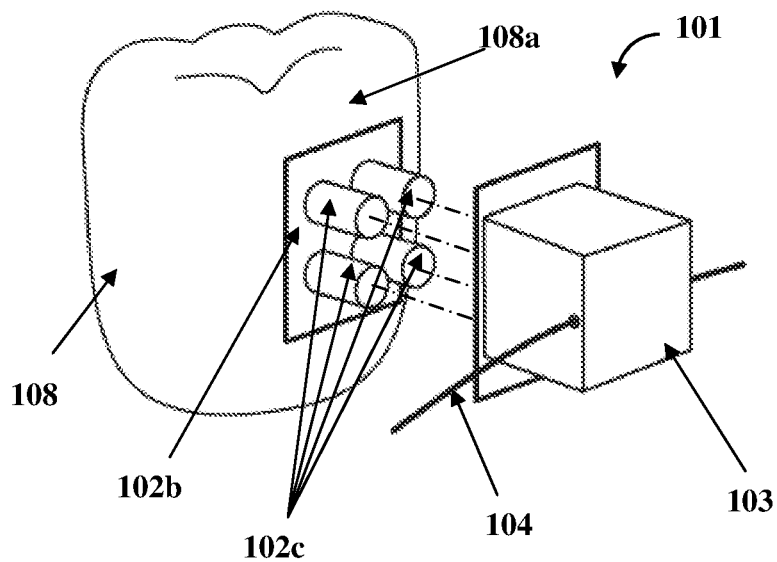


FIG. 10B

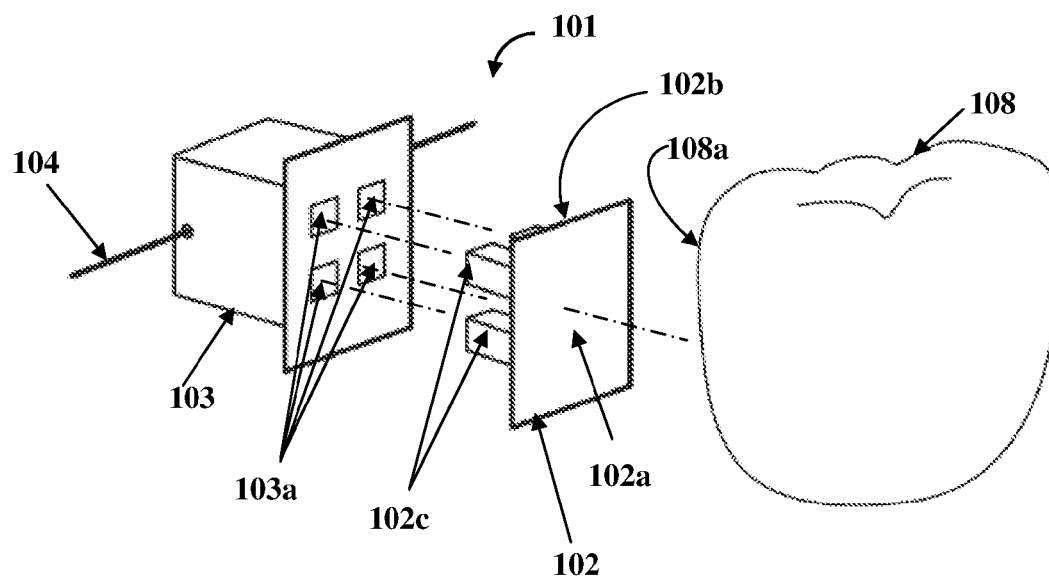


FIG. 11A

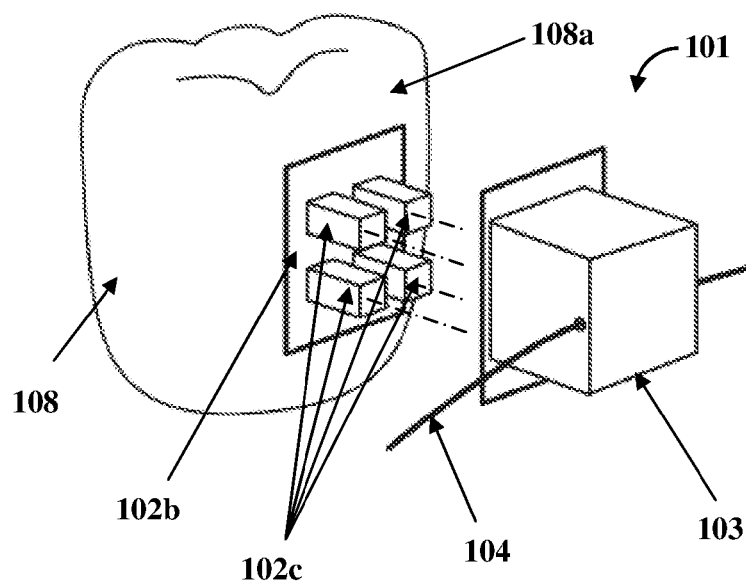


FIG. 11B

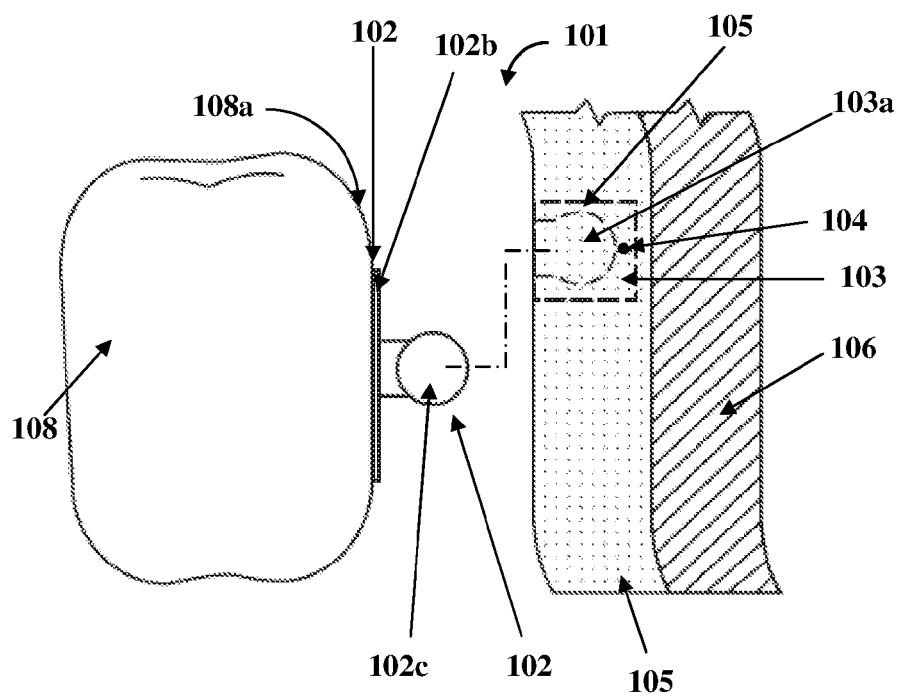


FIG. 12A

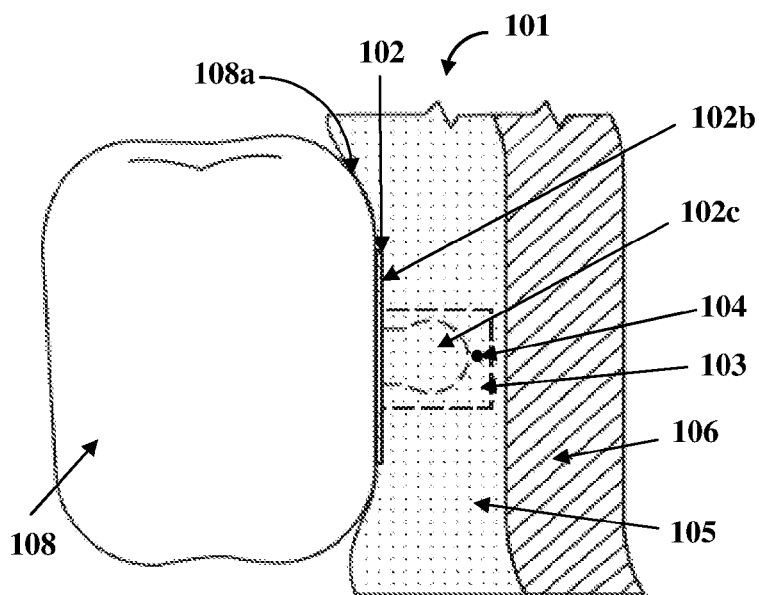


FIG. 12B

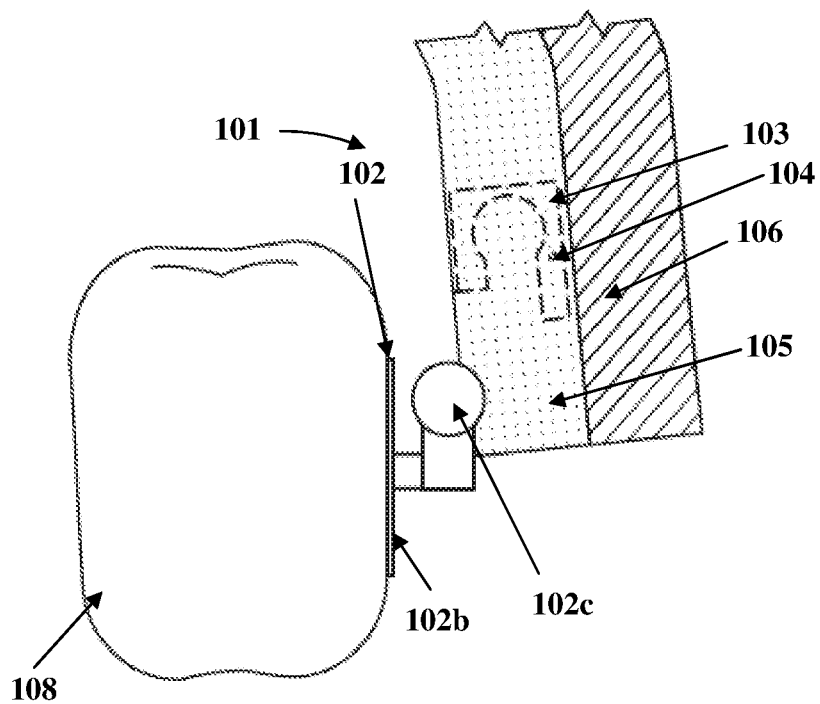


FIG. 13A

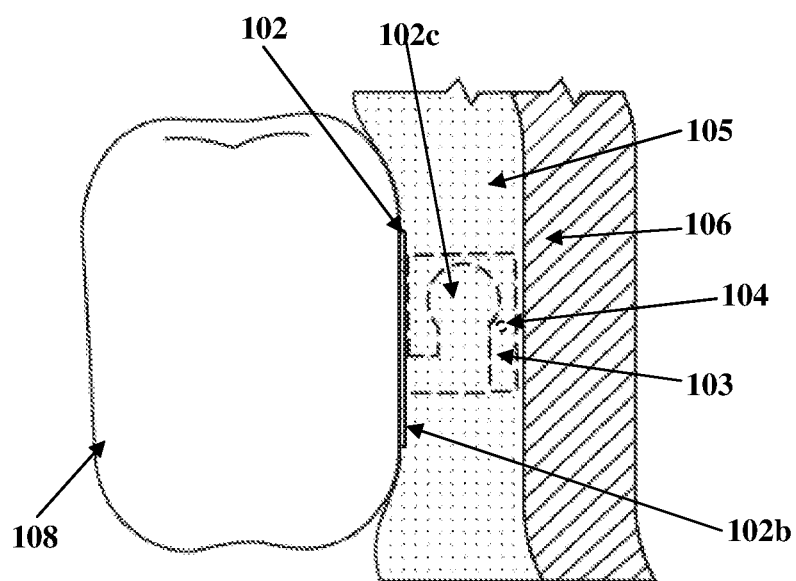


FIG. 13B

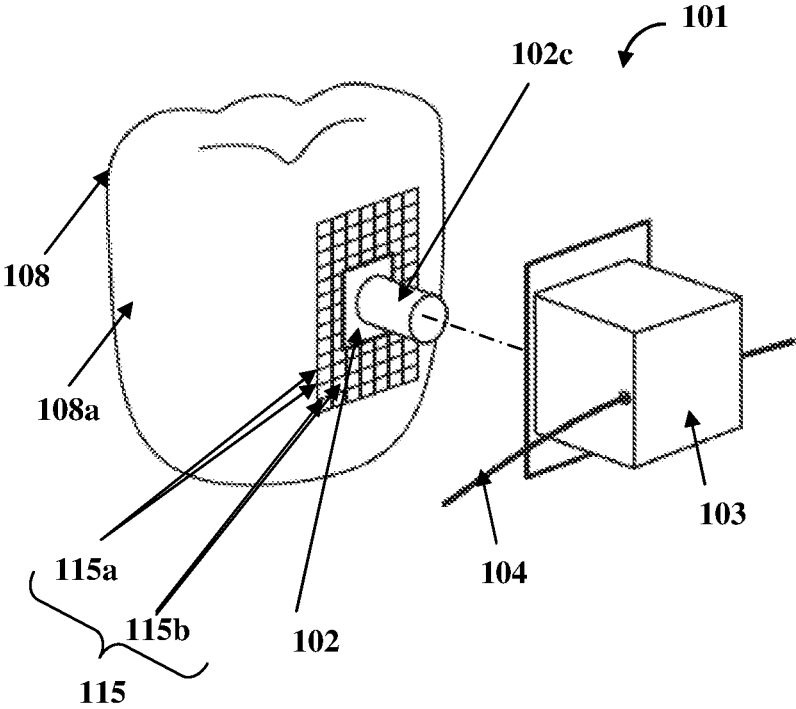


FIG. 14

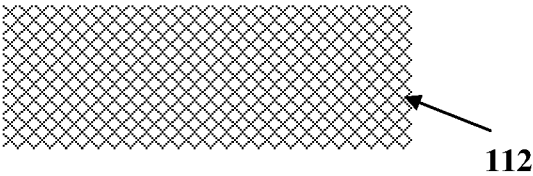


FIG. 15A

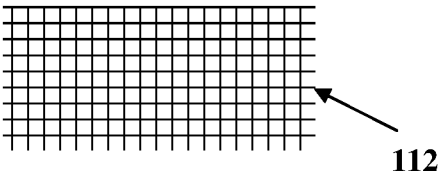


FIG. 15B




FIG. 15C

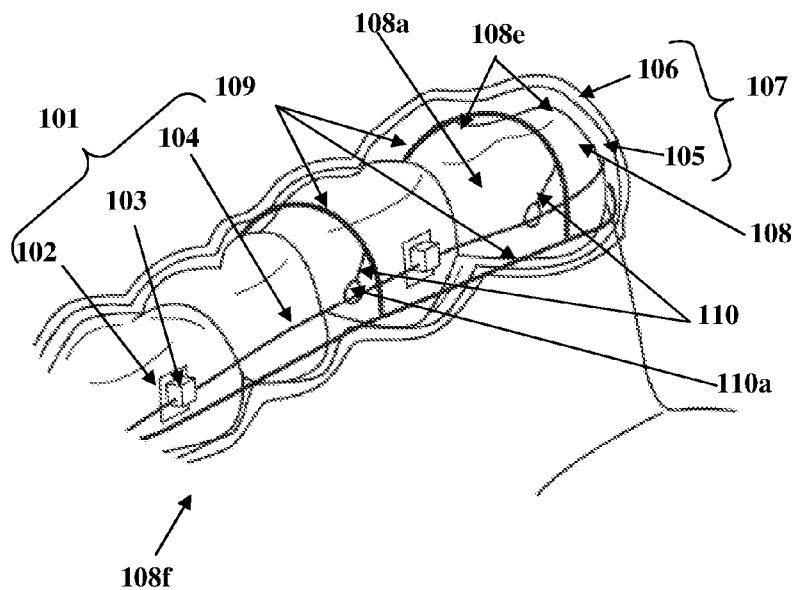


FIG. 16

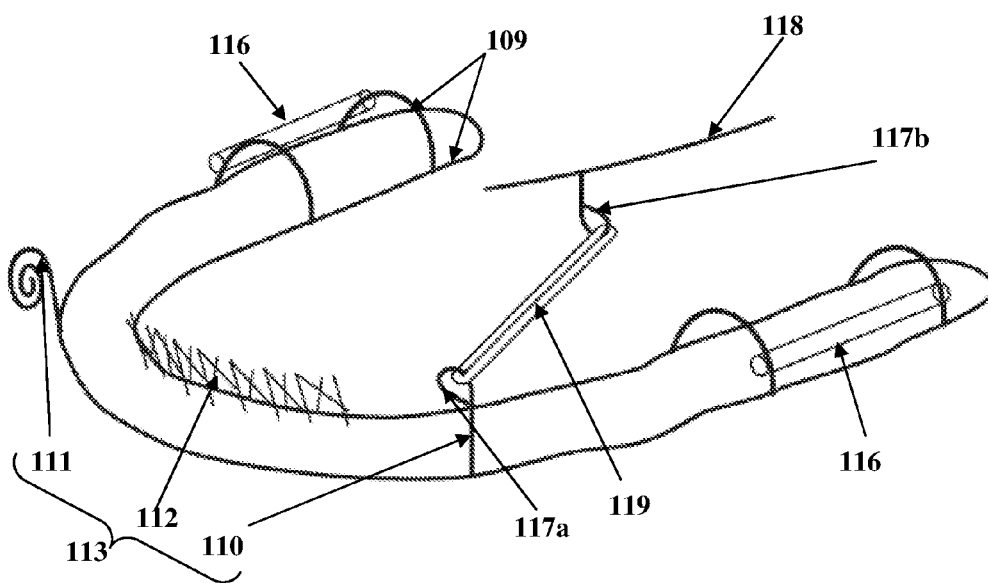


FIG. 17

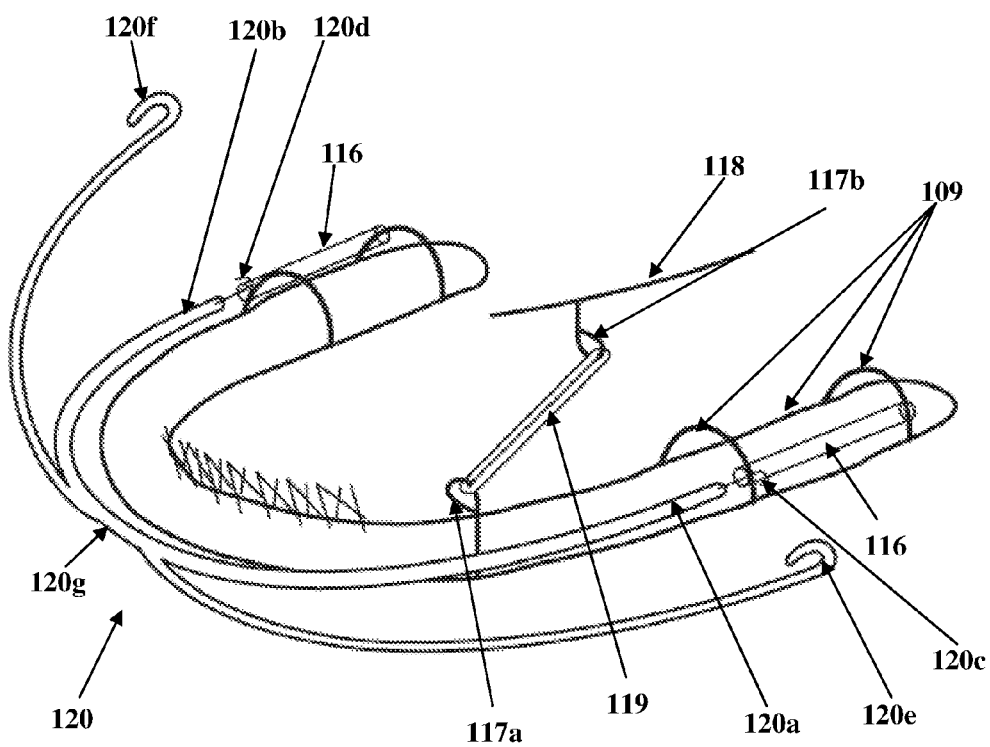


FIG. 18

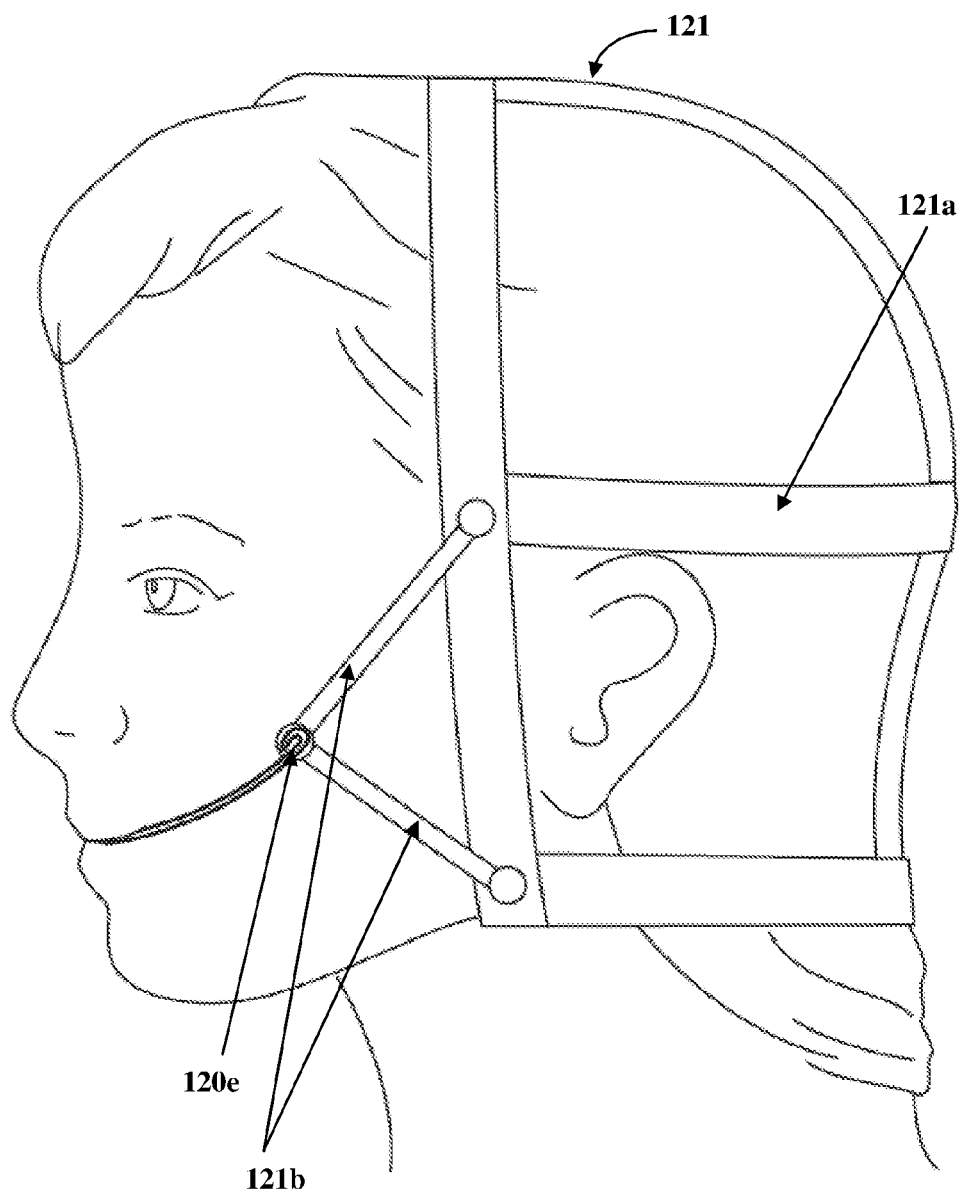


FIG. 19

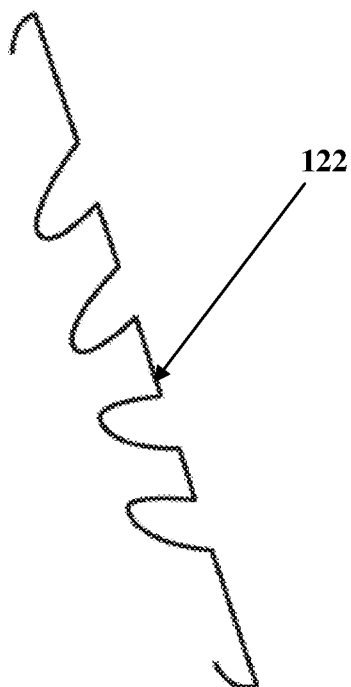


FIG. 20A

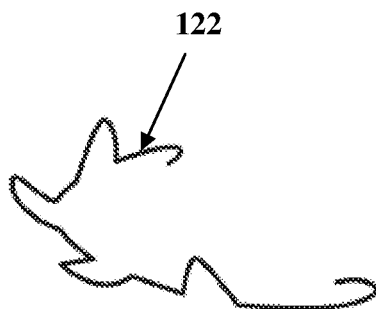


FIG. 20B

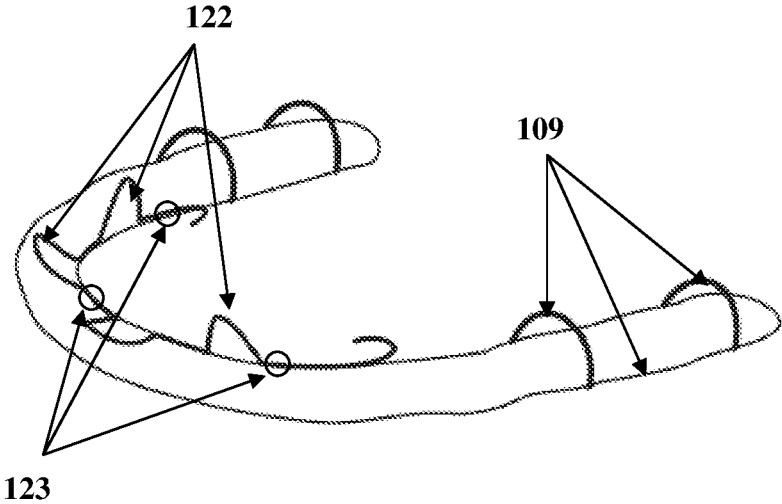


FIG. 20C

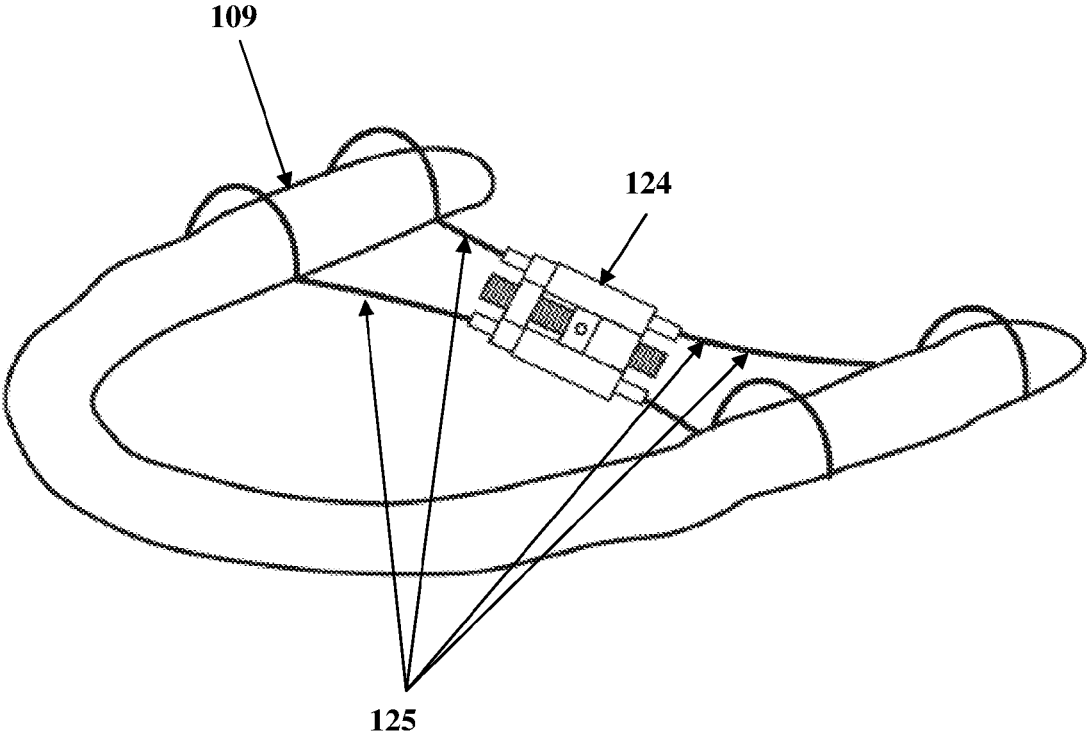


FIG. 21

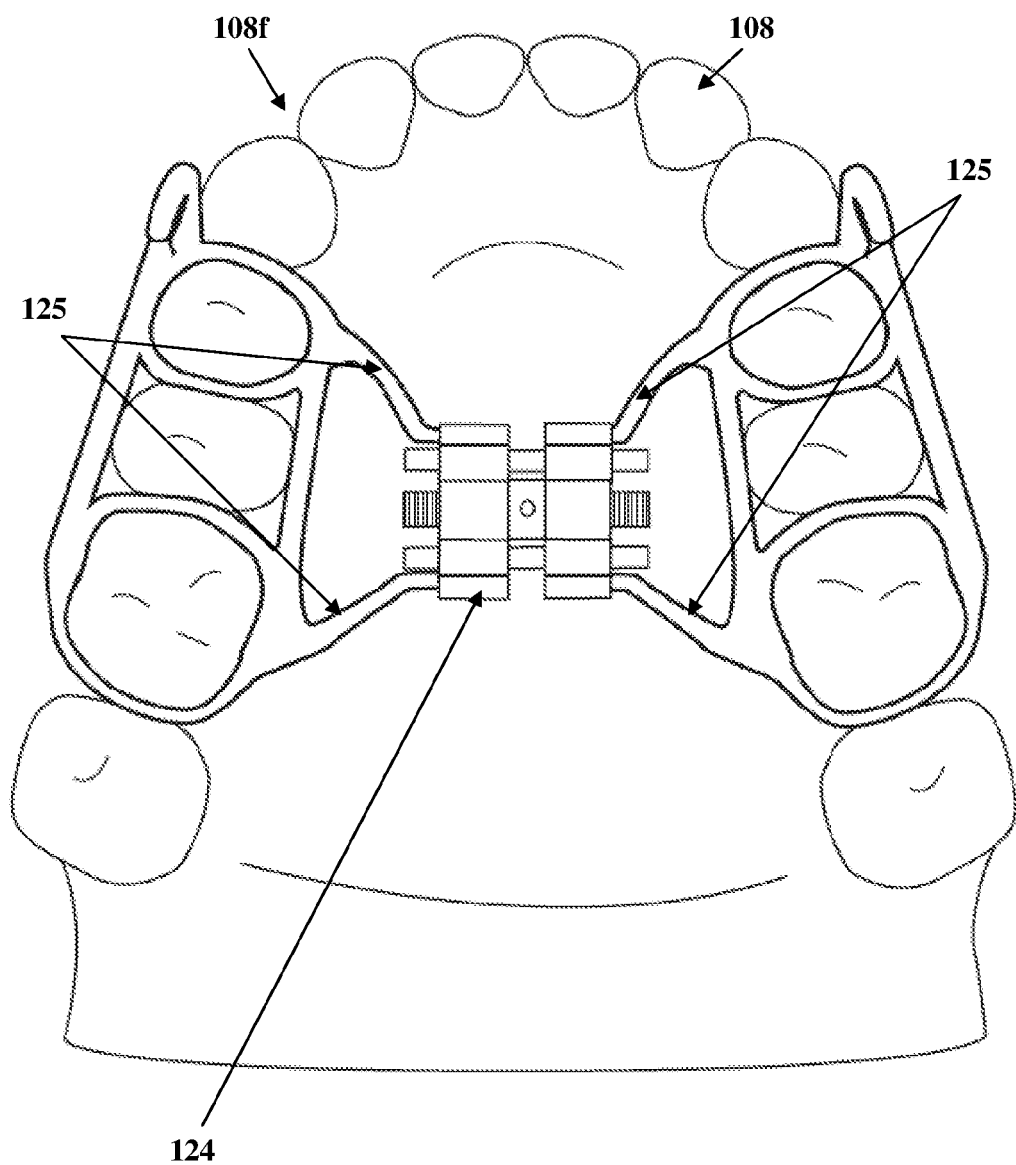


FIG. 22

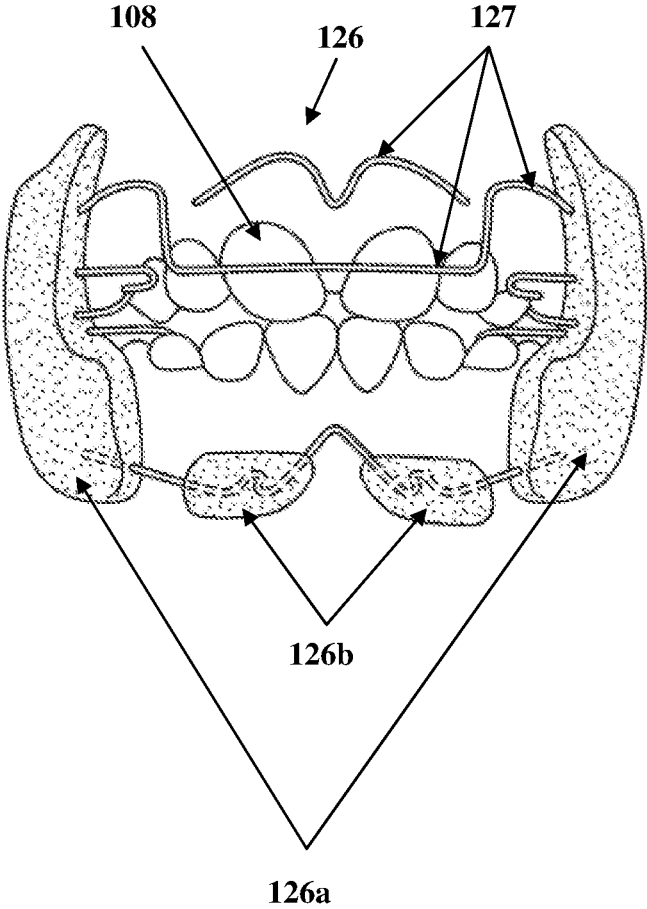


FIG. 23A

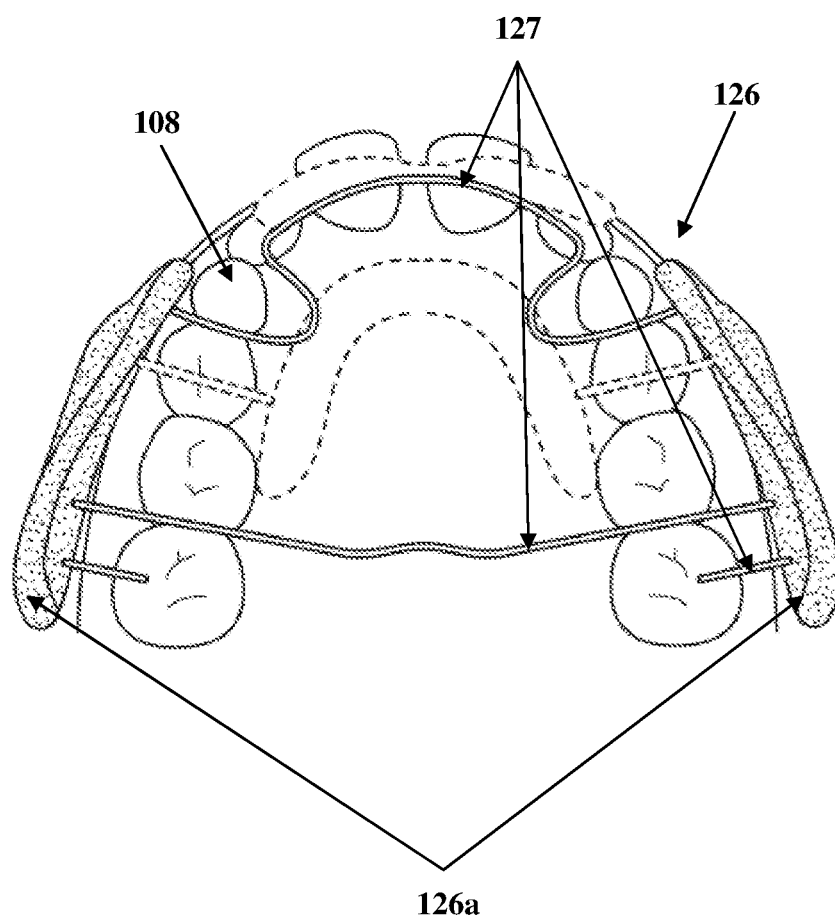


FIG. 23B

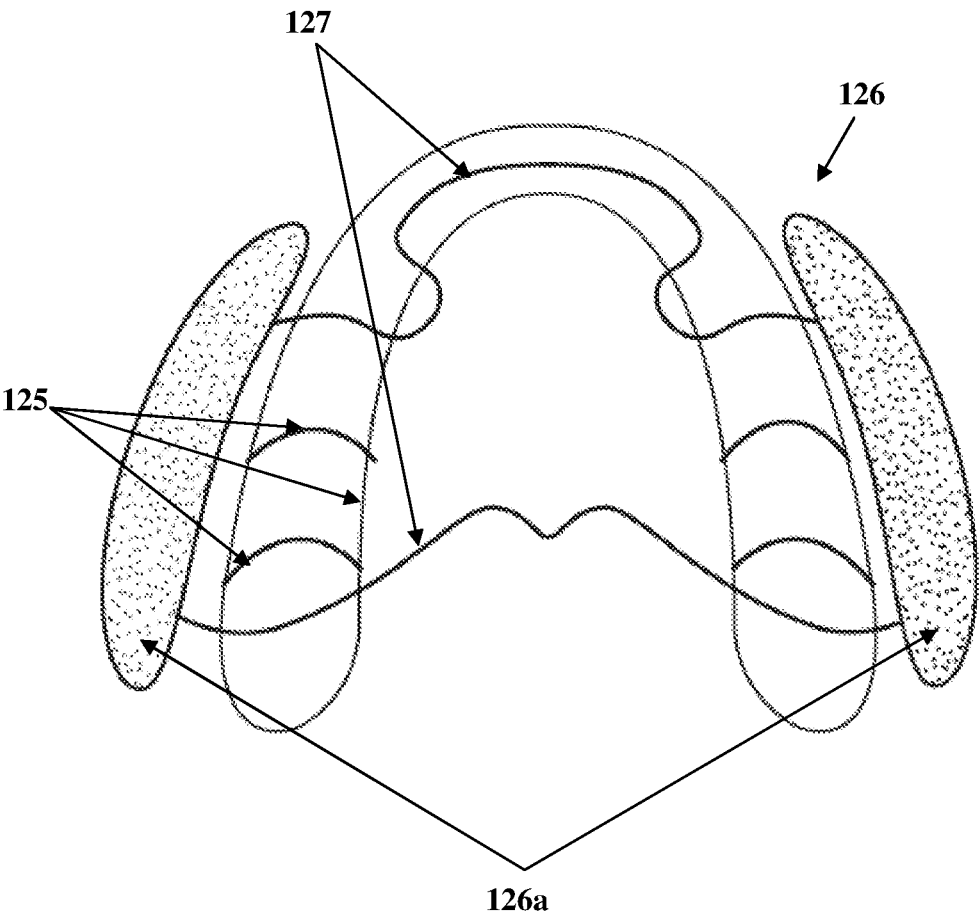


FIG. 23C

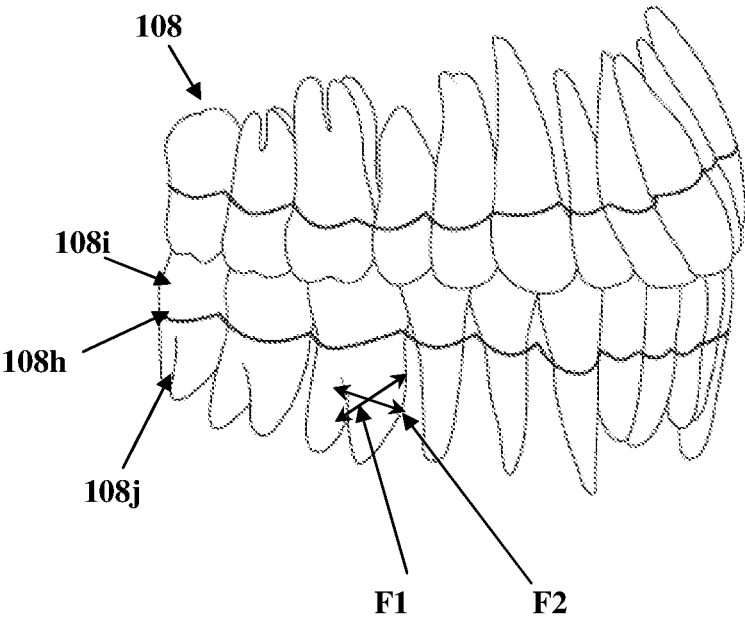


FIG. 24

DETACHABLE ORTHODONTIC BRACKET AND WIRE SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of the provisional patent application No. 62/243,672 titled “Detachable Orthodontic Bracket And Wire System”, filed in the United States Patent and Trademark Office on Oct. 20, 2015. The specification of the above referenced patent application is incorporated herein by reference in its entirety.

BACKGROUND

[0002] Orthodontic treatment involves repositioning of misaligned teeth to provide an improved appearance, bite relation, and masticating function. Repositioning teeth is accomplished by applying precision-controlled external forces to the teeth over a period of time. Orthodontists typically use one of two types of dental appliances to exert forces on the teeth, namely, fixed appliances and removable appliances.

[0003] Removable orthodontic appliances offer an alternative to conventional fixed orthodontic appliances. Minimal visibility during casual interactions is one of the benefits of removable orthodontic appliances. Patients generally prefer removable orthodontic appliances over fixed orthodontic appliances, because fixed orthodontic appliances are considered unsightly and are mostly used for adolescents. However, conventional removable orthodontic appliances lack strength, precision, and robustness of fixed orthodontic appliances which pose a problem for patients who require significant repositioning of teeth. Furthermore, removable orthodontic appliances may not always fit a patient's mouth properly, thereby causing pain or discomfort to the patient. This discomfort often negates the effectiveness of the orthodontic appliance.

[0004] To avoid a visible view of arch wires on a facial surface of the teeth, the arch wires are sometimes placed on the lingual surface of the teeth. Although some progress has been made with lingual placement of the arch wires, the small inter-bracket span, inaccessibility, and difficulty to adjust the arch wires make their use complicated. Thus, lingual placement is mostly used in simple and limited cases that involve minor tooth movement. Moreover, although a removable orthodontic appliance can use a wire and a bracket inside the removable orthodontic appliance to create a force for moving the teeth, the precision and strength of the removable orthodontic appliance are substantially less than the precision and the strength of fixed braces in which the bracket is bonded to the a surface of the teeth and in which the arch wires allow precise repositioning of the teeth. Therefore, there is a need for a system that is detachable and removable and can be precisely attached to a bonded base on a tooth for increasing the precision and the strength of the removable orthodontic appliance similar to a fixed bracket and wire system.

[0005] Hence, there is a long felt need for an orthodontic bracket and wire system that is detachably attachable to teeth with increased precision and strength for guiding alignment of teeth of an upper jaw or a lower jaw of a patient.

SUMMARY OF THE INVENTION

[0006] This summary is provided to introduce a selection of concepts in a simplified form that are further disclosed in the detailed description of the invention. This summary is not intended to determine the scope of the claimed subject matter.

[0007] The apparatus disclosed herein addresses the above recited needs for an orthodontic bracket and wire system detachably attachable to teeth with increased precision and strength for guiding alignment of teeth of an upper jaw or a lower jaw of a patient. The orthodontic bracket and wire system disclosed herein can be precisely attached to a bonded base on a tooth for increasing the precision and the strength of a removable orthodontic appliance.

[0008] The detachable orthodontic bracket and wire system disclosed herein comprises multiple bracket bases, multiple brackets, and at least one arch wire. The bracket bases are positioned on a lingual surface and/or a facial surface of a patient's teeth. Each of the bracket bases comprises a first surface, a second surface, and at least one first interlocking element. The first surface of each of the bracket bases is rigidly attached to the lingual surface, or the facial surface, or both the lingual surface and the facial surface of the teeth. The second surface of each of the bracket bases opposes the lingual surface and/or the facial surface of the teeth. The first interlocking element is attached to the second surface of each of the bracket bases and is positioned in a direction substantially perpendicular to or a direction substantially parallel to the second surface of each of the bracket bases.

[0009] Each of the brackets of the detachable orthodontic bracket and wire system comprises at least one second interlocking element configured to interlock with the corresponding first interlocking element of each of the bracket bases in the direction substantially perpendicular to or the direction substantially parallel to the second surface of each of the bracket bases. Each of the brackets further comprises a slot channel passing through each of the brackets. The arch wire is inserted through the slot channel of each of the brackets positioned on the lingual surface and/or the facial surface of the teeth. The arch wires extend from a molar region on a first side of a dental arch to a molar region on a second side of the dental arch. The arch wire is infused and rigidly anchored within an inner lingual side and/or an inner facial side of enclosing layers.

[0010] In an embodiment, the detachable orthodontic bracket and wire system further comprises a primary frame wire positioned on the facial surface and the lingual surface of the teeth and traverses from the facial surface to the lingual surface of the teeth through cusps of the teeth. The primary frame wire secures and anchors the brackets interlocked to the bracket bases to the teeth and provides strong orthodontic forces to the teeth. In another embodiment, the detachable orthodontic bracket and wire system further comprises one or more secondary frame wires anchored to the arch wire or the primary frame wire. The secondary wires are rigidly positioned individually around each of the teeth to allow each of the teeth to move independent of each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The foregoing summary, as well as the following detailed description of the invention, is better understood

when read in conjunction with the appended drawings. For the purpose of illustrating the invention, exemplary constructions of the invention are shown in the drawings. However, the invention is not limited to the specific methods and structures disclosed herein. The description of a method step or a structure referenced by a numeral in a drawing is applicable to the description of that method step or structure shown by that same numeral in any subsequent drawing herein.

[0012] FIG. 1 exemplarily illustrates an exploded view of a removable orthodontic appliance, showing a detachable orthodontic bracket and wire system for guiding alignment of teeth of a lower jaw of a patient.

[0013] FIG. 2 exemplarily illustrates an assembled isometric view of the removable orthodontic appliance comprising the detachable orthodontic bracket and wire system positioned on teeth of a lower jaw.

[0014] FIG. 3A exemplarily illustrates an exploded view of the removable orthodontic appliance, showing an embodiment of the detachable orthodontic bracket and wire system comprising a primary frame wire and secondary frame wires.

[0015] FIG. 3B exemplarily illustrates an assembled right isometric view of the removable orthodontic appliance comprising the embodiment of the detachable orthodontic bracket and wire system showing in FIG. 3A, positioned on teeth of a lower jaw.

[0016] FIG. 3C exemplarily illustrates an assembled left isometric view of the removable orthodontic appliance comprising the embodiment of the detachable orthodontic bracket and wire system showing in FIG. 3A, positioned on teeth of a lower jaw.

[0017] FIG. 3D exemplarily illustrates an assembled top perspective view of the removable orthodontic appliance comprising the embodiment of the detachable orthodontic bracket and wire system showing in FIG. 3A, positioned on teeth of a lower jaw.

[0018] FIG. 4A exemplarily illustrates an exploded view of the detachable orthodontic bracket and wire system.

[0019] FIG. 4B exemplarily illustrates an assembled left side elevation view of the detachable orthodontic bracket and wire system.

[0020] FIG. 4C exemplarily illustrates an exploded view of an embodiment of the detachable orthodontic bracket and wire system, showing a slot channel of a bracket and an arch wire with a rectangular cross section.

[0021] FIG. 4D exemplarily illustrates an exploded view of the embodiment of the detachable orthodontic bracket and wire system shown in FIG. 4C, showing the arch wire with a rectangular cross section inserted into the slot channel with a rectangular cross section.

[0022] FIG. 5A exemplarily illustrates an exploded view of the detachable orthodontic bracket and wire system, showing the bracket and the arch wire infused in an enclosing layer of the removable orthodontic appliance.

[0023] FIG. 5B exemplarily illustrates an assembled perspective view of the detachable orthodontic bracket and wire system, showing the bracket and the arch wire infused in the enclosing layer of the removable orthodontic appliance.

[0024] FIGS. 6A-6B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a first embodiment of the bracket detached from an embodiment of the bracket base.

[0025] FIGS. 7A-7B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a second embodiment of the bracket detached from an embodiment of the bracket base with a cross bar.

[0026] FIG. 7C exemplarily illustrates a front elevation view of the bracket base with the cross bar fixed to lingual surface of a tooth in the embodiment of the bracket base with the cross bar shown in FIGS. 7A-7B.

[0027] FIGS. 8A-8B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a third embodiment of the bracket detached from an embodiment of the bracket base.

[0028] FIGS. 9A-9B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a fourth embodiment of the bracket detached from an embodiment of the bracket base.

[0029] FIGS. 10A-10B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a fifth embodiment of the bracket detached from an embodiment of the bracket base.

[0030] FIGS. 11A-11B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system, showing a sixth embodiment of the bracket detached from an embodiment of the bracket base.

[0031] FIG. 12A exemplarily illustrates a disassembled partial sectional view of an embodiment of the detachable orthodontic bracket and wire system, showing positioning of a first interlocking element in a direction substantially perpendicular to a second surface of the bracket base.

[0032] FIG. 12B exemplarily illustrates an assembled partial sectional view of the embodiment of the detachable orthodontic bracket and wire system, showing attachment of the bracket to the bracket base shown in FIG. 12A, in a direction substantially perpendicular to the second surface of the bracket base.

[0033] FIG. 13A exemplarily illustrates a disassembled partial sectional view of an embodiment of the detachable orthodontic bracket and wire system, showing the positioning of the first interlocking element in a direction substantially parallel to the second surface of the bracket base.

[0034] FIG. 13B exemplarily illustrates an assembled partial sectional view of the embodiment of the detachable orthodontic bracket and wire system, showing attachment of the bracket to the bracket base shown in FIG. 13A, in a direction substantially parallel to the second surface of the bracket base.

[0035] FIG. 14 exemplarily illustrates an embodiment of the detachable orthodontic bracket and wire system, showing a mesh element attached to the bracket base.

[0036] FIGS. 15A-15C exemplarily illustrate elevation views of embodiments of a secondary frame wire of the embodiment of the detachable orthodontic bracket and wire system shown in FIG. 3A.

[0037] FIG. 16 exemplarily illustrates a partial perspective view of an embodiment of the detachable orthodontic bracket and wire system shown in FIG. 3A, showing an embodiment of the secondary frame wires through which the arch wire is passed.

[0038] FIG. 17 exemplarily illustrates a perspective view of a primary frame wire of the embodiment of the detachable orthodontic bracket and wire system shown in FIG. 3A,

showing positioning of tubes on the primary frame wire and elastics on the secondary frame wires.

[0039] FIG. 18 exemplarily illustrates a perspective view of a primary frame wire of the embodiment of the detachable orthodontic bracket and wire system shown in FIG. 3A, showing positioning of a face bow for an extraoral orthodontic appliance attached to the tubes on the primary frame wire.

[0040] FIG. 19 exemplarily illustrates a right side elevation view of an extraoral orthodontic appliance worn by a patient and fixed to hooks of the face bow shown in FIG. 18.

[0041] FIG. 20A exemplarily illustrates a pre-bended wire.

[0042] FIG. 20B exemplarily illustrates the pre-bended wire in an arch form.

[0043] FIG. 20C exemplarily illustrates a perspective view of the primary frame wire with the pre-bended wire in the arch form shown in FIG. 20B added thereto, in an embodiment of the detachable orthodontic bracket and wire system.

[0044] FIG. 21 exemplarily illustrates a perspective view of the primary frame wire attached to a palatal expander.

[0045] FIG. 22 exemplarily illustrates a top plan view of the primary frame wire attached to the palatal expander.

[0046] FIGS. 23A-23C exemplarily illustrate embodiments showing frame wires used for connecting a Frankel appliance to teeth.

[0047] FIG. 24 exemplarily illustrates forces and torque applied on roots of teeth by the detachable orthodontic bracket and wire system.

DETAILED DESCRIPTION OF THE INVENTION

[0048] FIG. 1 exemplarily illustrates an exploded view of a removable orthodontic appliance 100, showing a detachable orthodontic bracket and wire system 101 for guiding the alignment of teeth 108 of a lower jaw 108f of a patient. The removable orthodontic appliance 100 is a trough shaped arch tray that defines a space between substantially vertical sides of the arch tray for accommodating the teeth 108 of an upper jaw (not shown) or a lower jaw 108f. As exemplarily illustrated in FIG. 1, the removable orthodontic appliance 100 is detachably attached to teeth 108 of the lower jaw 108f. In an embodiment (not shown), the removable orthodontic appliance 100 is detachably attachable to teeth 108 of the upper jaw (not shown). The detachable orthodontic bracket and wire system 101 disclosed herein is detachably attached to the teeth 108 and enclosed by enclosing layers 107 as exemplarily illustrated in FIG. 2. The enclosing layers 107 comprise a first soft enclosing layer 105 and a second hard enclosing layer 106. The soft enclosing layer 105 is, for example, made of a soft plastic, for example, polyethylene, polyester, ethylene vinyl acetate (EVA), etc. The second hard enclosing layer 106 is, for example, made of a hard plastic, for example, a polyethylene-vinyl acetate copolymer. The detachable orthodontic bracket and wire system 101 can be used on both inner lingual side 105a and inner facial side 105b of the enclosing layer 106. The detachable orthodontic bracket and wire system 101 guides alignment of the teeth 108 of an upper jaw or a lower jaw 108f of a patient.

[0049] The detachable orthodontic bracket and wire system 101 disclosed herein comprises multiple bracket bases 102, multiple brackets 103, and at least one arch wire 104. As exemplarily illustrated in FIG. 1, the bracket bases 102

are positioned on a lingual surface 108a of the patient's teeth 108. In an embodiment (not shown), the bracket bases 102 are positioned on a facial surface 108b of the patient's teeth 108. In another embodiment (not shown), the bracket bases 102 are positioned on both the lingual surface 108a and the facial surface 108b of the patient's teeth 108. The bracket bases 102 are bonded and cemented directly on the lingual surface 108a and/or the facial surface 108b of the teeth 108. The bracket bases 102 are made of, for example, a rigid metal, or an acrylic material, or a composite material, or a ceramic material, etc., or in an embodiment, any combination thereof. The shape of each bracket base 102 and the number and distribution of the bracket bases 102 in the detachable orthodontic bracket and wire system 101 is configurable and can be changed based on the requirement of the teeth 108 to be aligned, etc. The brackets 103 are interlocked with the bracket bases 102 as disclosed in the detailed description of FIGS. 4A-4D, FIGS. 5A-5B, and FIGS. 6A-6B.

[0050] The orthodontic bracket and wire system 101 disclosed herein is detachable and has a strong interlocking strength when attached to the teeth 108. The bracket bases 102 and the brackets 103 of the detachable orthodontic bracket and wire system 101 are manufactured with high precision and physical strength for delivering a precise and strong orthodontic force to attach the removable orthodontic appliance 100 firmly to the teeth 108. As used herein, "orthodontic force" refers to a mechanical force applied to the teeth 108 to optimally align the teeth 108 as required by an orthodontist. The detachable orthodontic bracket and wire system 101 is bonded to teeth 108 that are required to be actively and precisely moved in a predefined direction to ensure a predictable teeth configuration. Clear or white colored bracket bases 102 can be used in the detachable orthodontic bracket and wire system 101 for esthetic appearance. While the detachable orthodontic bracket and wire system 101 transfers the orthodontic force from the arch wire 104 to each tooth 108, the primary source of orthodontic forces is produced from the arch wire 104. Since the arch wire 104 is detachable and not fixed to the teeth 108, the detachable orthodontic bracket and wire system 101 provides a stable, enclosed, rigid and elastic framework that allows the original shape of the arch wire 104 to be retained when the arch wire 104 is attached and detached from the teeth 108.

[0051] As exemplarily illustrated in FIG. 1, the bracket base 102 is positioned on a lingual surface 108a of the teeth 108. The bracket base 102 is fixedly attached to the teeth 108 using adhesive materials, for example, bonding cement. In an embodiment (not shown), the bracket base 102 is positioned on a facial surface 108b of the teeth 108. Each bracket base 102 comprises a first surface 102a, a second surface 102b, and at least one first interlocking element 102c as exemplarily illustrated in FIGS. 4A-4D, FIGS. 5A-5B, FIGS. 6A-6B, FIGS. 8A-8B, FIGS. 9A-9B, FIGS. 10A-10B, and FIGS. 11A-11B. The first surface 102a of each bracket base 102 is rigidly attached to the lingual surface 108a of the teeth 108. In an embodiment (not shown), the first surface 102a of each bracket base 102 is rigidly attached to the facial surface 108b of the teeth 108. In another embodiment (not shown), first surfaces 102a of the bracket bases 102 are rigidly attached to the lingual surface 108a and the facial surface 108b of the teeth 108. The lingual surface 108a and/or the facial surface 108b of the teeth 108 are coated

with an adhesive material, for example, bonding cement that affixes the first surface **102a** of the bracket base **102** to the lingual surface **108a** and/or the facial surface **108b** of the teeth **108**. In an embodiment, the bonding cement is coated on the first surface **102a** of the bracket base **102** and used to attach the first surface **102a** of the bracket base **102** to the lingual surface **108a** and/or the facial surface **108b** of the teeth **108**. In another embodiment, the bonding cement is coated on both the lingual surface **108a** and/or the facial surface **108b** of the teeth **108** and the first surface **102a** of the bracket base **102**. The second surface **102b** of each bracket base **102** opposes the lingual surface **108a** and/or the facial surface **108b** of the teeth **108**. As exemplarily illustrated in FIG. 1, the first interlocking element **102c** is attached to and extends from the second surface **102b** of the bracket base **102**. In an embodiment, the first interlocking element **102c** is detachably attached to the second surface **102b** of the bracket base **102**. The first interlocking element **102c** is positioned in a direction substantially perpendicular to the second surface **102b** of each bracket base **102** as disclosed in the detailed description of FIGS. 12A-12B. In an embodiment, the first interlocking element **102c** is positioned in a direction substantially parallel to the second surface **102b** of each bracket base **102** as disclosed in the detailed description of FIGS. 13A-13B.

[0052] As exemplarily illustrated in FIG. 1, each bracket **103** of the detachable orthodontic bracket and wire system **101** comprises at least one second interlocking element **103a** configured to interlock with a corresponding first interlocking element **102c** of each bracket base **102** exemplarily illustrated in FIG. 1, in a direction substantially perpendicular to the second surface **102b** of the bracket base **102** as disclosed in the detail description of FIGS. 12A-12B, and in an embodiment, in a direction substantially parallel to the second surface **102b** of the bracket base **102** as disclosed in the detail description of FIGS. 13A-13B. The interlocking elements **102c** and **103a** can be of multiple different shapes. The first interlocking element **102c** of each bracket base **102** is configured, for example, as an oval projection, a circular projection, a square projection, a cuboidal projection, a cylindrical projection, etc. Non-circular shaped projections and two or more projections provide better force control than a single projection. For example, a double base projection provides a better anchor for a bending force.

[0053] The second interlocking element **103a** of each bracket **103** is configured as a receptacle of a corresponding shape to interlock the first interlocking element **102c** of each bracket base **102**. The bracket **103** further comprises a slot channel **103b** passing through each bracket **103** as exemplarily illustrated in FIG. 4A and FIG. 4C. The slot channel **103b** of the bracket **103** is positioned proximal to an inner lingual side **105a** of the first soft enclosing layer **105** exemplarily illustrated in FIG. 1, or in an embodiment (not shown) to an inner facial side **105b** of the first soft enclosing layer **105**, or in another embodiment (not shown) to the inner lingual side **105a** and the inner facial side **105b** of the first soft enclosing layer **105**.

[0054] As illustrated in FIG. 1, the arch wire **104** is inserted through the slot channel **103b** of each bracket **103**. The arch wire **104** extends from a molar region **108c** on a first side of a dental arch **108g** to a molar region **108d** on a second side of the dental arch **108g**. The slot channel **103b** is configured with a predefined cross section, for example, a circular cross section to accommodate the arch wire **104**

configured with the same predefined cross section, for example, the circular cross section. The function of the arch wire **104** is to align the teeth **108** along the path of the arch wire **104**. The arch wire **104** and each bracket **103** are infused and rigidly anchored within the inner lingual side **105a** and/or the inner facial side **105b** of the first soft enclosing layer **105**, for example, via heat infusion as disclosed in the detailed description of FIG. 2. The arch wire **104** and each bracket **103** are infused and rigidly anchored within the inner lingual side **105a** of the first soft enclosing layer **105**. In an embodiment (not shown), the arch wire **104** and each bracket **103** are infused and rigidly anchored within the inner facial side **105b** of the first soft enclosing layer **105**. In another embodiment (not shown), the arch wire **104** and each bracket **103** are infused and rigidly anchored within the inner lingual side **105a** and the inner facial side **105b** of the first soft enclosing layer **105**. In another embodiment, the arch wire **104** and each bracket **103** are infused and rigidly anchored within the inner lingual side **105a** and/or the inner facial side **105b** of the first soft enclosing layer **105** and within an inner lingual side (not shown) and/or an inner facial side (not shown) of the second hard enclosing layer **106**. The arch wire **104** that runs through the slot channel **103b** of each bracket **103** provides an arch form and a force, for example, a translational force applied against the teeth **108** to be aligned. The slot channel **103b** allows translational motion of the arch wire **104** through an open space in the slot channel **103b**. When the slot channel **103b** has a rectangular cross section and the arch wire **104** has a rectangular cross section as exemplarily illustrated in FIGS. 4C-4D, the slot channel **103b** exerts a torque on the arch wire **104** through side walls of the slot channel **103b** similar to a torque mechanism in a fixed bracket system.

[0055] FIG. 2 exemplarily illustrates an assembled isometric view of the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** positioned on the teeth **108** of the lower jaw **108f**. The detachable orthodontic bracket and wire system **101** are enclosed by the enclosing layers **107**. The enclosing layers **107** comprise a first soft enclosing layer **105** and a second hard enclosing layer **106**. The enclosing layers **107** are placed on the teeth **108** after the bracket bases **102** and the assembly of the brackets **103** and the arch wire **104** are positioned on the teeth **108**. In areas of the teeth **108** and gum surface without the assembly of the brackets **103** and the arch wire **104**, the first soft enclosing layer **105** is positioned directly over the teeth **108** or gum surface. The first soft enclosing layer **105** provides support and remains elastic to transmit orthodontic forces from the arch wire **104** to the teeth **108**. The first soft enclosing layer is, for example, a soft layer made of a plastic material. In an embodiment, the first soft enclosing layer **105** is made from other soft materials, for example, polyethylene, polyester, ethylene vinyl acetate (EVA), etc. The first soft enclosing layer **105** infuses and rigidly anchors each bracket **103** and the arch wire **104** inserted through the slot channel **103b** of each bracket **103**. As exemplarily illustrated in FIG. 2, the first soft enclosing layer **105** infuses with each bracket **103** and the arch wire **104** at the inner lingual side **105a** of the first soft enclosing layer **105**. In an embodiment (not shown), the first soft enclosing layer **105** infuses with each bracket **103** and the arch wire **104** at the inner facial side **105b** of the first soft enclosing layer **105**. The first soft enclosing layer **105** encloses the teeth **108** on the lingual

surface **108a** and the facial surface **108b** of the teeth **108** as exemplarily illustrated in FIG. 2. In an embodiment, the first soft enclosing layer **105** is first placed over the teeth **108** and a portion of the first soft enclosing layer **105** is cut out around the bracket base **102** to allow placement of the assembly of the brackets **103** and the arch wire **104** over the first soft enclosing layer **105**.

[0056] The second hard enclosing layer **106** encloses the first soft enclosing layer **105**. In an embodiment, a thin second hard enclosing layer **106** is sprayed or heat fused over the first soft enclosing layer **105** to provide extra rigidity to the removable orthodontic appliance **100**. The second hard enclosing layer **106** is, for example, a thin hard layer made of a plastic material. In an embodiment, the second hard enclosing layer **106** is made of different hard materials, for example, a polyethylene-vinyl acetate copolymer. In an embodiment, the second hard enclosing layer **106** infuses and rigidly anchors each bracket **103** and the arch wire **104**. The second hard enclosing layer **106** encloses the first soft enclosing layer **105** and in turn, the lingual surface **108a** of the teeth **108** and the facial surface **108b** of the teeth **108**.

[0057] The detachable orthodontic bracket and wire system **101** is embedded in the enclosing layers **107** via heat infusion. The arch wire **104** is configured to maximize the liquid flow of viscous melted plastic to each void between the teeth **108** and the arch wire **104**. In an embodiment, for increasing the strength of the infusion, a coating of a hard plastic material or an adhesive is coated on the arch wire **104** and the brackets **103**, and as the coating of the hard plastic material melts, the hard plastic material infuses with the first soft enclosing layer **105** made, for example, of a soft plastic material. In an example, the arch wire **104** is coated with a thin layer of hard plastics. The hard plastics, when heated, bond better with the first soft enclosing layer **105**. In an embodiment, the heating process is accomplished by placing a positive electrode and a negative electrode at the two ends of the arch wire **104** and using an electric current to heat the metal material of the arch wire **104** to a predetermined temperature which melts the plastic material of the enclosing layers **107** to fuse with the arch wire **104** and the brackets **103**. In another embodiment, the arch wire **104** is heated by microwave heating which provides heat only to the metal material of the arch wire **104**.

[0058] The second hard enclosing layer **106** is placed over the first soft enclosing layer **105** to provide better rigidity and resilience. The second hard enclosing layer **106** is rigid for protection and the first soft enclosing layer **105** is flexible for ease and comfort of fitting onto the teeth **108**. Softer plastics, for example, polyethylene can be used for making the enclosing layers **107** when more elastic force is needed to pull the teeth **108** together. Materials such as Zendura® of Bay Materials LLC that offer both rigidity and resilience can be used to make the enclosing layers **107**, when moderate level forces are needed to pull the teeth **108** together. The thickness of the plastic material of each of the enclosing layers **107** is, for example, from about 0.5 mm to about 2 mm, so that the plastic material offers elasticity to fit the removable orthodontic appliance **100** onto the teeth **108**, while the arch wire **104** retains its elasticity. The enclosing layers **107** provide an elastic framework to the detachable orthodontic bracket and the wire system **101** and retain the shape of the arch wire **104** inserted in the slot channel **103b** of each bracket **103** exemplarily illustrated in FIG. 1. The

enclosing layers **107** facilitates easy removal of the detachable orthodontic bracket and wire system **101** since the enclosing layers **107** are infused in the arch wire **104**. The enclosing layers **107** protect the teeth **108** from impact and prevent collection of food particles in the detachable orthodontic bracket and wire system **101**. The detachable orthodontic bracket and wire system **101** comprising the bracket bases **102**, the brackets **103**, the arch wire **104**, and the enclosing layers **107** constitute the arch tray, herein referred to as the “removable orthodontic appliance”.

[0059] FIG. 3A exemplarily illustrates an exploded view of the removable orthodontic appliance **100**, showing an embodiment of the detachable orthodontic bracket and wire system **101** comprising a primary frame wire **109** and secondary frame wires **113**. In an embodiment, in addition to the bracket bases **102**, the brackets **103**, and the arch wire **104** disclosed in the detailed description of FIG. 1, the detachable orthodontic bracket and wire system **101** further comprises a primary frame wire **109** and one or more secondary frame wires **113**. In this embodiment, there are different types of wires in the detachable orthodontic bracket and wire system **101**, for example, the arch wire **104** that produces the orthodontic force, and the primary frame wire **109** and/or the secondary frame wires **113** that support the arch wire **104** into a rigid and elastic framework. The primary frame wire **109** is positioned on the facial surface **108b** and the lingual surface **108a** of the teeth **108**. The primary frame wire **109** traverses from the facial surface **108b** to the lingual surface **108a** of the teeth **108** through cusps **108e** of the teeth **108**. The primary frame wire **109** secures and anchors the brackets **103** interlocked to the bracket bases **102** to the teeth **108** and provides strong orthodontic forces to the teeth **108** for aligning the teeth **108**. The primary frame wire **109** maintains the elasticity of the entire removable orthodontic appliance **100**. The primary frame wire **109** is made of a metal wire or a fiberglass wire that retains elasticity for a longer time than a plastic material used for conventional, clear and removable orthodontic appliances. The primary frame wire **109** is coated with a color that matches teeth **108** or gums, for example, white, pink, etc. The primary frame wires **109** coated, for example, with a white color can run between the cusps **108e** of the teeth **108** and embrace the main anchoring teeth such as canines and molars. The primary frame wire **109** secures and anchors the brackets **103** and runs from the lingual surface **108a** of the teeth **108** to the facial surface **108b** of the teeth **108**. The primary frame wire **109** can be positioned between any of the teeth **108** or all of the teeth **108** from the facial surface **108b** to the lingual surface **108a** of the upper jaw (not shown) and the lower jaw **108f** of the teeth **108** along gum lines. In an embodiment, additional primary frame wires **109** are incorporated in the detachable orthodontic bracket and wire system **101** as needed for guiding alignment of the teeth **108** of the upper jaw and the lower jaw **108f**. In an embodiment, the arch wire **104** is either soldered together with the primary frame wire **109** or is detached from the primary frame wire **109**.

[0060] In an embodiment, the orthodontic bracket and wire system **101** further comprises one or more secondary frame wires **113**, also referred to as “mini-frame wires”, rigidly positioned individually around each of the teeth **108** to allow each of the teeth **108** to move independent of each other. The secondary frame wire **113** facilitates independent movement of the teeth **108** by anchoring to the primary

frame wire 109. In an embodiment, the secondary frame wire 113 is anchored to the arch wire 104 as exemplarily illustrated in FIG. 16. The function of the secondary frame wire 113 is to apply a predesigned orthodontic force to a tooth 108 or a group of teeth 108. The secondary frame wire 113 is configured in a loop configuration as a loop wire 110, or in a spiral configuration as a spiral wire 111, or in a mesh configuration as a mesh wire 112 as exemplarily illustrated in FIGS. 3A-3D. The primary frame wire 109 provides an anchoring force for each of the secondary frame wires 113. The loop wire 110 and the spiral wire 111 are positioned around individual tooth 108 and provide an individualized orthodontic force to each tooth independent of the orthodontic force applied to other teeth 108. Each tooth can receive and respond individually to an orthodontic force. Since teeth alignment treatments require individualized orthodontic forces and movement, each tooth must be segregated in its rigidity, anchors, and motion individually and receive an individualized orthodontic force. Furthermore, each tooth has six degrees of freedom, three spatial dimensions of translation, rotation, tipping, and torques. The secondary frame wires 113 can be designed around each tooth to allow relative motions between each tooth. Each of the secondary frame wires 113 remains rigid around each tooth and allows relative movement such as rotation, tipping, and torque between surrounding teeth 108.

[0061] The secondary frame wires 113 configured as the loop wire 110, the spiral wire 111, and the mesh wire 112 exert forces over a large planar surface. These secondary frame wires 113 can be bent and shaped around each tooth to provide a rigid anchor and coverage. In an embodiment, the secondary frame wires 113 are added as a mini-framework anchoring around the tooth or soldered to the primary frame wire 109. In another embodiment, the secondary frame wires 113 are added between the teeth 108 on a mesial side or a distal side of the tooth 108, or on a single tooth 108 on the lingual surface 108a or a facial surface 108b of posterior teeth 108. In an embodiment, the secondary frame wires 113 integrate and are interlocked with the enclosing layers 107 and offer a rigid anchor on each tooth surface. An embodiment of the secondary frame wire 113 in a mesh configuration as a mesh wire 112 in different shapes are exemplarily illustrated in FIGS. 15A-15C.

[0062] FIG. 3B-3D exemplarily illustrate an assembled right isometric view, an assembled left isometric view, and an assembled top perspective view of the removable orthodontic appliance 100 respectively, comprising the embodiment of the detachable orthodontic bracket and wire system 101 shown in FIG. 3A, positioned on the teeth 108 of the lower jaw 108f. In this embodiment, the detachable orthodontic bracket and wire system 101 comprising the bracket bases 102, the brackets 103, the arch wire 104, the primary frame wire 109, the secondary frame wire 113, and the enclosing layers 107 constitute the arch tray, herein referred to as the “removable orthodontic appliance”. The primary frame wire 109 with the secondary frame wires 113 is positioned on the interface of the teeth 108 and gums of the teeth 108. In an embodiment, the primary frame wire 109 with the secondary frame wires 113 is positioned on the teeth 108. In this embodiment, the detachable orthodontic bracket and wire system 101 comprising the bracket bases 102, the brackets 103, the arch wire 104, the primary frame wire 109, and the secondary frame wire 113 exemplarily illustrated in

FIG. 3A, are embedded in the enclosing layers 107 via heat infusion as disclosed in the detailed description of FIG. 2.

[0063] The enclosing layers 107 hold the wires 104, 109, 110, 111, 112, etc., of the detachable orthodontic bracket and wire system 101 that constitute a metal framework that provides a holding force and a clear and esthetic appearance in frontal area of the teeth 108. In an embodiment, the enclosing layers 107 are added both on the top and bottom of the removable orthodontic appliance 100 to sandwich the detachable orthodontic bracket and wire system 101 comprising the bracket bases 102, the brackets 103, and the wires, for example, 104, 109, 110, 111, 112, etc., between the two enclosing layers 107. The top enclosing layer 106 is rigid to provide protection and the bottom enclosing layer 105 is flexible for ease and comfort of fitting onto the teeth 108. In an embodiment, the enclosing layers 107 are positioned over a bite surface of the removable orthodontic appliance 100 to guide the upper jaw (not shown) and the lower jaw 108f to move against each other to correct a cross bite, an over bite, an under bite, and other parafunctional relations between the upper jaw and the lower jaw 108f. In an embodiment, the plastic material of the enclosing layers 107 is bonded with the brackets 103 and the wires, for example, 104, 109, 110, 111, 112, etc. The brackets 103 and the wires, for example, 104, 109, 110, 111, 112, etc., are embedded inside a plastic material of the enclosing layers 107 via heat infusion. The wires, for example, the arch wire 104, the primary frame wire 109, and the secondary frame wires 113, etc., are configured to maximize the liquid flow of viscous melted plastic to each void between the teeth 108 and the wires, for example, 104, 109, 110, 111, 112, etc.

[0064] The physical properties and strength of the enclosing layers 107 made of, for example, a plastic material that can be changed at different stages during an orthodontic treatment and at different arches of the orthodontic treatment, as different amounts of force can be prescribed by a clinician on different teeth 108. For example, since translation needs a strong force, when a translation motion is the dominant motion of the teeth 108 along the primary frame wire 109 exemplarily illustrated in FIG. 3A, a strong arch wire 104 and a rigid plastic material are used. Softer plastics, for example, polyethylene can be used for the enclosing layers 107 when more elastic force is needed to pull the teeth 108 together. Materials such as Zendura® of Bay Materials LLC offer both rigidity and resilience and can be used on the enclosing layers 107, when moderate level forces are needed. The thickness of the plastic material used can be thin, for example, about 0.5 mm to about 2 mm so that the plastic material offers elasticity to fit the removable orthodontic appliance 100 onto the teeth 108, while the wires, for example, 104, 109, 110, 111, 112, etc., retain their elasticity.

[0065] FIGS. 4A-4B exemplarily illustrate an exploded view and an assembled left side elevation view respectively, of the detachable orthodontic bracket and wire system 101 exemplarily illustrated in FIG. 1 and FIG. 3A. Each bracket 103 of the detachable orthodontic bracket and wire system 101 comprises the slot channel 103b passing through the bracket 103 as exemplarily illustrated in FIG. 4A. As exemplarily illustrated in FIGS. 4A-4B, the slot channel 103b has a circular cross section. Each bracket 103 of the detachable orthodontic bracket and wire system 101 is positioned such that the slot channel 103b of each bracket 103 is positioned proximal to the inner lingual side 105a of

the first soft enclosing layer **105** exemplarily illustrated in FIG. 1 and FIG. 3A. In an embodiment (not shown), the slot channel **103b** of each bracket **103** is positioned proximal to the inner facial side **105b** of the first soft enclosing layer **105**. As exemplarily illustrated in FIG. 4B, the arch wire **104** is accommodated within the slot channel **103b** of each bracket **103** on the lingual surface **108a** of the teeth **108** exemplarily illustrated in FIG. 1, FIG. 2, and FIGS. 3A-3D. The arch wire **104** has a circular cross section as exemplarily illustrated in FIGS. 4A-4B, and is inserted into the slot channel **103b** having a circular cross section. The arch wire **104** engages with the bracket **103** in the slot channel **103b** of the bracket **103** that is spatially separated from the bracket base **102**. The separation can be vertical or horizontal. The arch wire **104** has common arch forms, for example, a round tapered arch form, an oval shaped arch form, etc. Unlike the arch wire **104** positioned on the facial surface **108b** of the teeth **108**, in an embodiment, the arch wire **104** positioned on the lingual surface **108a** of the teeth **108** has a twist or a twisted arch form at a canine area of the teeth **108** and a uniform arch form in other regions of the teeth **108**. As the first soft enclosing layer **105** exemplarily illustrated in FIG. 1, FIG. 2, and FIGS. 3A-3D, reduces orthodontic strength of the arch wire **104**, an arch wire **104** with a high strength or a large diameter is used to compensate the loss of orthodontic forces.

[0066] As exemplarily illustrated in FIGS. 4A-4B, the bracket **103** further comprises a second interlocking element **103a**, for example, a cuboidal receptacle, and the bracket base **102** comprises a first interlocking element **102c**, for example, a cuboidal projection extending from the second surface **102b** of the bracket base **102**. The second interlocking element **103a** of the bracket **103** is configured to accommodate the first interlocking element **102c** of the bracket base **102**. The first interlocking element **102c** of the bracket base **102** interlocks with the second interlocking element **103a** of the bracket **103** as exemplarily illustrated in FIG. 4B. In an embodiment, the first interlocking element **102c** of the bracket base **102** snap fits into the second interlocking element **103a** of the bracket **103**. In an embodiment, the arch wire **104** and the brackets **103** are coated with a polymeric material, for example, a polyurethane resin formulated for rigidly bonding the arch wire **104** and each of the brackets **103** to the first soft enclosing layer **105**, or to both the enclosing layers **107** using one or more infusion methods, for example, electric heating, microwave heating, etc.

[0067] FIGS. 4C-4D exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and the wire system **101**, showing the slot channel **103b** of the bracket **103** and an arch wire **104** with a rectangular cross section. The slot channel **103b** with the rectangular cross section exemplarily illustrated in FIG. 4C, is configured to accommodate the arch wire **104** with the rectangular cross section. The arch wire **104** with the rectangular cross section is inserted into the slot channel **103b** with the rectangular cross section as exemplarily illustrated in FIG. 4D.

[0068] FIGS. 5A-5B exemplarily illustrate an exploded view and an assembled perspective view respectively, of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing the bracket **103** and the arch wire **104** infused in the first soft enclosing layer **105** of the removable orthodontic appliance

100 exemplarily illustrated in FIG. 1 and FIG. 3A. The first surface **102a** of each bracket base **102** is rigidly attached or bonded to the lingual surface **108a** of the teeth **108**. A first interlocking element **102c**, for example, a square shaped projection is attached to and extends from the second surface **102b** of the bracket base **102**. Each corresponding bracket **103** comprises a second interlocking element **103a**, for example, a square shaped receptacle configured to receive and interlock with the square shaped projection of the bracket base **102**. Detachably interlocking the square shaped projection of the bracket base **102** into the square shaped receptacle of the bracket **103** allows detachable attachment of the bracket **103** to the bracket base **102**, and in turn, removable attachment of the removable orthodontic appliance **100** to the lingual surface **108a** of the teeth **108**. The arch wire **104** passes through the slot channel **103b** of each bracket **103** as exemplarily illustrated in FIGS. 5A-5B. The bracket **103** with the arch wire **104** inserted in the slot channel **103b**, is infused and embedded into the first soft enclosing layer **105** as exemplarily illustrated in FIGS. 5A-5B, thereby enabling the removable orthodontic appliance **100** to be removably attached to the lingual surface **108a** of the teeth **108**.

[0069] FIGS. 6A-6B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing a first embodiment of the bracket **103** detached from an embodiment of the bracket base **102**. In an embodiment, the first interlocking element **102c** of the bracket base **102** is configured, for example, as a ball projection that is attached to and extends from the second surface **102b** of the bracket base **102**. In this embodiment, the second interlocking element **103a** of the bracket **103** is configured, for example, as a socket to receive and interlock with the ball projection of the bracket base **102**. The ball projection of the bracket base **102** interlocks with the second interlocking element **103a**, for example, the socket of the bracket **103** to attach the bracket **103** to the bracket base **102**. The ball projection of the bracket base **102** snaps into the socket of the bracket **103** to provide better retention. To snap into the socket of the bracket **103**, the ball projection **102c** of the bracket base **102** is compressible and therefore passes through the socket of the bracket **103** and then locks into the socket of the bracket **103**.

[0070] In an embodiment (not shown), the second interlocking element **103a** is configured, for example, as a ball projection that is attached to and extends from the bracket **103**. In this embodiment, the first interlocking element **102c** of the bracket base **102** is configured, for example, as a socket to receive and interlock with the ball projection of the bracket **103**. The ball projection of the bracket **103** snaps into the socket of the bracket base **102** to provide better retention. For purposes of illustration, the detailed description refers to a ball projection and socket interlocking mechanism for attaching the bracket **103** to the bracket base **102**; however the scope of the detachable orthodontic bracket and wire system **101** disclosed herein and exemplarily illustrated in FIG. 1 and FIG. 3A, is not limited to a ball projection and socket interlocking mechanism but may be extended to include any interlocking mechanism that detachably attaches the bracket **103** to the bracket base **102**.

[0071] FIGS. 7A-7B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG.

1 and FIG. 3A, showing a second embodiment of the bracket **103** detached from an embodiment of the bracket base **102** with a cross bar **114**. Since the first interlocking element **102c**, for example, the ball projection does not offer retention against rotation around a ball axis, an additional structure is needed to engage the bracket **103** with the bracket base **102**. In an embodiment, the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, further comprises the cross bar **114** positioned below each first interlocking element **102c**, for example, each ball projection of each bracket base **102**. In this embodiment, each bracket **103** further comprises a receptacle **103c** to engage the cross bar **114** and restrict movement of each bracket **103** over a corresponding bracket base **102**. As the socket of the bracket **103** snaps into the ball projection of the bracket base **102**, the bracket **103** engages the bracket base **102** through the ball projection and the cross bar **114**. If an orthodontic force is applied to rotate the bracket **103**, the rotational force transfers from the bracket **103** to the bracket base **102** through the cross bar **114**. Since the bracket bases **102** are bonded, for example, to the lingual surface **108a** of the teeth **108** exemplarily illustrated in FIG. 1 and FIGS. 3A-3D, the orthodontic force from the bracket base **102** transfers to the teeth **108** with precision and efficiency.

[0072] FIG. 7C exemplarily illustrates a front elevation view of the bracket base **102** with the cross bar **114** fixed to the lingual surface **108a** of the tooth **108** in the embodiment of the bracket base **102** with the cross bar **114** shown in FIGS. 7A-7B. The cross bar **114** is positioned below each first interlocking element **102c** on the second surface **102b** of the bracket base **102**. On engaging with the receptacle **103c**, the cross bar **114** restricts movement of each bracket **103** over the corresponding bracket base **102** as exemplarily illustrated in FIGS. 7A-7B.

[0073] FIGS. 8A-8B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing a third embodiment of the bracket **103** detached from an embodiment of the bracket base **102**. In this embodiment, the bracket base **102** comprises a single first interlocking element **102c**, for example, a single cylindrical shaped projection and the bracket **103** comprises a corresponding single second interlocking element **103a**, for example, a single cylindrical shaped receptacle. The single cylindrical shaped projection of the bracket base **102** is attached to and extends from the second surface **102b** of the bracket base **102**. The single cylindrical shaped projection of the bracket base **102** interlocks with the single cylindrical shaped receptacle of the bracket **103** to attach the bracket **103** to the bracket base **102**. The single cylindrical shaped projection of the bracket base **102** snaps into the single cylindrical shaped receptacle of the bracket **103** to provide better retention.

[0074] FIGS. 9A-9B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing a fourth embodiment of the bracket **103** detached from an embodiment of the bracket base **102**. In this embodiment, the bracket base **102** comprises two first interlocking elements **102c**, for example, two cylindrical shaped projections and the bracket **103** comprises corresponding two second interlocking elements **103a**, for example, two cylindrical shaped receptacles. The two cylin-

drically shaped projections of the bracket base **102** are attached to and extend from the second surface **102b** of the bracket base **102**. The two cylindrical shaped projections of the bracket base **102** interlock with the two cylindrical shaped receptacles of the bracket **103** to attach the bracket **103** to the bracket base **102**. The two cylindrical shaped projections of the bracket base **102** snap into the two cylindrical shaped receptacles of the bracket **103** to provide better retention. Multiple cylindrical shaped projections are configured in the bracket base **102** to increase the rotational force of the bracket **103**.

[0075] When there are multiple first interlocking elements **102c**, for example, projections extending from the second surface **102b** of the bracket base **102**, it is difficult to insert all the first interlocking elements **102c** into the corresponding second interlocking elements **103a** of the bracket **103** at the same time. Therefore, one or more of the first interlocking elements **102c** of the bracket base **102** can be used as guide points, the position of which will not be changed and which will insert into the corresponding second interlocking elements **103a** of the bracket **103**. The other of the first interlocking elements **102c** of the bracket base **102** need to be arranged to push in a new position, since the change of position produces a reaction force that positions the teeth **108**, to a new position. To produce the orthodontic force to move the teeth **108** from a current position to the new position, the second interlocking elements **103a** of the brackets **103** and the first interlocking elements **102c** of the bracket bases **102** are positioned at a predetermined location so that the change of position of the teeth **108** produces a reactive force to return to the original position. At the new positions of the teeth **108**, the first interlocking elements **102c** of the bracket bases **102** must fit into the corresponding second interlocking elements **103a** of the brackets **103** as the first interlocking elements **102c** have moved to a new position along with the teeth **108**. To optimize the fitting process for dental providers, a primary first interlocking element **102c** of each bracket base **102** is retained at the original position as an anchor and a guide, and fitting of the other first interlocking elements **102c** of each bracket base **102** is executed relative to the primary first interlocking element **102c**.

[0076] FIGS. 10A-10B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing a fifth embodiment of the bracket **103** detached from an embodiment of the bracket base **102**. In this embodiment, the bracket base **102** comprises four first interlocking elements **102c**, for example, four cylindrical shaped projections and the bracket **103** comprises corresponding four second interlocking elements **103a**, for example, four cylindrical shaped receptacles. The four cylindrical shaped projections of the bracket base **102** are attached to and extend from the second surface **102b** of the bracket base **102**. The four cylindrical shaped projections of the bracket base **102** interlock with the four cylindrical shaped receptacles of the bracket **103** to attach the bracket **103** to the bracket base **102**. The four cylindrical shaped projections of the bracket base **102** snap into the four cylindrical shaped receptacles of the bracket **103** to provide better retention.

[0077] FIGS. 11A-11B exemplarily illustrate exploded views of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG.

1 and FIG. 3A, showing a sixth embodiment of the bracket **103** detached from an embodiment of the bracket base **102**. In this embodiment, the bracket base **102** comprises four first interlocking elements **102c**, for example, four rectangular or cuboidal shaped projections and the bracket **103** comprises corresponding four second interlocking elements **103a**, for example, four rectangular or cuboidal shaped receptacles. The four rectangular or cuboidal shaped projections of the bracket base **102** are attached to and extend from the second surface **102b** of the bracket base **102**. The four rectangular or cuboidal shaped projections of the bracket base **102** interlock with the four rectangular or cuboidal shaped receptacles of the bracket **103** to attach the bracket **103** to the bracket base **102**. The four rectangular or cuboidal shaped projections of the bracket base **102** snap into the four rectangular or cuboidal shaped receptacles of the bracket **103** to provide better retention.

[0078] FIG. 12A exemplarily illustrates a disassembled partial sectional view of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing positioning of a first interlocking element **102c**, for example, a ball projection in a direction substantially perpendicular to the second surface **102b** of the bracket base **102** positioned on a lingual surface **108a** of the teeth **108**. The ball projection is positioned substantially perpendicular with respect to the second surface **102b** of the bracket base **102**. The bracket **103** is infused in the first soft enclosing layer **105**, while the second hard enclosing layer **106** is positioned over the first soft enclosing layer **105**. As exemplarily illustrated in FIG. 12A, the bracket **103** comprising the second interlocking element **103a**, for example, the socket is detached from the ball projection of the bracket base **102**.

[0079] FIG. 12B exemplarily illustrates an assembled partial sectional view of the embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing attachment of the bracket **103** to the bracket base **102** shown in FIG. 12A, in a direction substantially perpendicular to the second surface **102b** of the bracket base **102**. As exemplarily illustrated in FIG. 12B, the bracket **103** comprising the second interlocking element **103a**, for example, a socket exemplarily illustrated in FIG. 12A, is attached to the bracket base **102** comprising the interlocking element **102c**, for example, the ball projection positioned in a direction substantially perpendicular to the second surface **102b** of the bracket base **102** exemplarily illustrated in FIG. 12A.

[0080] FIG. 13A exemplarily illustrates a disassembled partial sectional view of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing the positioning of the first interlocking element **102c**, for example, a ball projection in a direction substantially parallel to the second surface **102b** of the bracket base **102**. The bracket **103** is infused in the first soft enclosing layer **105**, while the second hard enclosing layer **106** is positioned over the first soft enclosing layer **105**. In an embodiment, the ball projection is positioned substantially parallel with respect to the second surface **102b** of the bracket base **102**. To optimally control the orthodontic force, the alignment of the ball projection is changed from substantially perpendicular to the tooth surface to substantially parallel to the tooth surface. The parallel alignment of the ball projection allows easier insertion and engagement of the detachable orthodontic bracket

and wire system **101** exemplarily illustrated in FIG. 1, from the top of the teeth **108**. The parallel alignment of the ball projection provides rotational force around the tooth axis. In another embodiment, the ball projection is positioned at any angle, for example, from about 90° to about 0° with respect to the second surface **102b** of the bracket base **102** to optimize the insertion process. As exemplarily illustrated in FIG. 13A, the bracket **103** comprising, for example, the socket is detached from the ball projection of the bracket base **102**.

[0081] FIG. 13B exemplarily illustrates an assembled partial sectional view of the embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing attachment of the bracket **103** to the bracket base **102** shown in FIG. 13A, in a direction substantially parallel to the second surface **102b** of the bracket base **102**. As exemplarily illustrated in FIG. 13B, the bracket base **102** comprising the first interlocking element **102c**, for example, a ball projection positioned in a direction substantially parallel to the second surface **102b** of the bracket base **102** is attached to the socket of the bracket **103**.

[0082] FIG. 14 exemplarily illustrates an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. 1 and FIG. 3A, showing a mesh element **115** attached to the bracket base **102**. In this embodiment, the bracket **103** is attached to the bracket base **102** that is secured to the mesh element **115**. The mesh element **115** comprises mesh work **115a** with holes **115b** to allow the plastic material of the first soft enclosing layer **105** exemplarily illustrated in FIG. 1 and FIG. 3A, to run through the holes **115b** and secure each bracket base **102** to the first soft enclosing layer **105**. In an embodiment, the mesh element **115** conforms to a shape of the lingual surface **108a** of the teeth **108** exemplarily illustrated in FIG. 1 and FIGS. 3A-3D. The mesh element **115** provides a rigid yet elastic anchor to the lingual surface **108a** of the teeth **108** exemplarily illustrated in FIG. 1 and FIGS. 3A-3D. The mesh element **115** is soldered or welded to the bracket base **102**. In an embodiment, the mesh element **115** conforms to the shape of the teeth **108** and is positioned on each bracket base **102** around the first interlocking element **102c** to secure each bracket base **102** to the first soft enclosing layer **105**.

[0083] FIGS. 15A-15C exemplarily illustrate elevation views of embodiments of a secondary frame wire **113** of the embodiment of the detachable orthodontic bracket and wire system **101** shown in FIG. 3A. FIG. 15A exemplarily illustrates an embodiment of the mesh wire **112** configured, for example, as a cross bar mesh. The mesh wire **112** configured as a cross bar mesh offers different directions of elastic force along the mesh configuration. In an embodiment, a thin stripe of the mesh wire **112** configured as a cross bar mesh is positioned on the lingual side **105a** of the first soft enclosing layer **105** exemplarily illustrated in FIG. 3A, to maximize strength and elasticity of the mesh wire **112**. The cross bar mesh has the elastic forces of wires in the cross bar mesh, and therefore is more elastic in a horizontal direction. A dentist can select a direction to position the cross bar mesh to expand or stabilize the arch form. The cross bar mesh is soldered to the arch wire **104** and/or to the primary frame wire **109** exemplarily illustrated in FIGS. 3B-3D.

[0084] FIG. 15B exemplarily illustrates an embodiment of the mesh wire **112** configured, for example, as an orthogonal

mesh. The mesh wire **112** configured as an orthogonal mesh offers different directions of elastic force along the mesh configuration. The orthogonal mesh provides more rigidity than the cross bar mesh exemplarily illustrated in FIG. **15A**. In an embodiment, the orthogonal mesh and the cross bar mesh are combined based on the desired movement needed in the arch form.

[**0085**] FIG. **15C** exemplarily illustrates an embodiment of the mesh wire **112** configured, for example, as an orthogonal mesh. In this embodiment, the wires of the mesh are arranged at right angles to each other. In an embodiment, the mesh wire **112** is infused in the first soft enclosing layer **105** exemplarily illustrated in FIG. **3A**. This embodiment of the mesh wire **112** helps in better adhesion of the first soft enclosing layer **105** exemplarily illustrated in FIG. **3A**, to the tooth surface.

[**0086**] FIG. **16** exemplarily illustrates a partial perspective view of an embodiment of the detachable orthodontic bracket and wire system **101** exemplarily illustrated in FIG. **3A**, showing an embodiment of the secondary frame wires **113**, for example, loop wires **110** through which the arch wire **104** is passed. In this embodiment, the arch wire **104** passes through the loop wire **110** that is secured to and extends from the primary frame wire **109** on the lingual surface **108a** of the teeth **108**. The loop wire **110** can be welded or soldered to the arch wire **104** and/or the primary frame wire **109** or hinged along the arch wire **104** which allows limited movement such as translation and rotation of targeted teeth **108** around the arch wire **104**. Thus, the loop wire **110** is secured around each tooth, and each tooth can move along the arch wire **104** and respond to the orthodontic forces. In an embodiment, a circular loop **110a** or a double circular loop of the loop wire **110** secures the arch wire **104** with the first soft enclosing layer **105**. The arch wire **104** runs through the center of the circular loop **110a** of the loop wire **110** to allow sliding movement of targeted teeth **108** along the arch wire **104**.

[**0087**] FIG. **17** exemplarily illustrates a perspective view of a primary frame wire **109** of the embodiment of the detachable orthodontic bracket and wire system **101** shown in FIG. **3A**, showing positioning of tubes **116** and elastics **119** on the secondary frame wire **113**. In an embodiment, the detachable orthodontic bracket and wire system **101** further comprises tubes **116** fixedly attached to the primary frame wire **109** for engaging with an extraoral orthodontic appliance (not shown), for example, face gear, headgear exemplarily illustrated in FIG. **19**, cervical headgear, high pull headgear, a reverse pull face mask, etc. The tubes **116** are soldered on to the primary frame wire **109** to engage the extraoral orthodontic appliance. In an embodiment, the detachable orthodontic bracket and wire system **101** is combined with an airway management appliance, for example, a mandibular advancing snore guard for patients who are aged and critically require airway management to preclude obstruction of the airway by the detachable orthodontic bracket and wire system **101** and their own airway structure.

[**0088**] In another embodiment, the detachable orthodontic bracket and wire system **101** further comprises one or more hooks **117a** and **117b** positioned on one or more canines and/or one or more molars of the lower jaw **108f** or the upper jaw (not shown). In an embodiment, the hook **117a** is a part of the loop wire **110**. The hook **117b** is connected to a wire **118** that extends from the upper jaw. The hooks **117a** and

117b are added to the anchoring teeth **108** from the lower arch of the lower jaw **108f** exemplarily illustrated in FIG. **1**, FIG. **2**, and FIGS. **3A-3B**, and the upper arch of the upper jaw respectively as exemplarily illustrated in FIG. **17**. In another embodiment, the detachable orthodontic bracket and wire system **101** further comprises one or more elastics **119** positioned on the hooks **117a** and **117b** as exemplarily illustrated in FIG. **17**. The elastic **119** is hooked to the hook **117a** of the loop wire **110** and to the hook **117b** extending from the wire **118** connected to the upper jaw. The elastics **119** engage between the teeth **108** in the upper jaw or the lower jaw **108f**. The elastics **119** connect the upper jaw and the lower jaw **108f** to provide an optimal orthodontic force to correct conditions such as a cross bite, an over bite, etc. In an embodiment, the elastics **119** are engaged between the teeth **108** in the upper jaw and the lower jaw **108f**, and the teeth **108** embraced by the secondary frame wires **113** can slide along the arch wire **104** to correct the cross bite and other dental malalignments.

[**0089**] In an embodiment, since the detachable orthodontic bracket and wire system **101** disclosed herein substantially increases the strength of the brackets **103** on the teeth **108**, elastics **119**, and springs (not shown) from a fixed arch wire and bracket system can be incorporated in the detachable orthodontic bracket and wire system **101**. In another embodiment, since an occlusal force between teeth **108** of the upper jaw (not shown) and teeth **108** of the lower jaw **108f** exemplarily illustrated in FIG. **1**, FIG. **2**, and FIGS. **3A-3B**, are required for the movement of the teeth **108**, for example, about 1 mm to about 3 mm diameter and about 0.5 mm to about 1.5 mm height cylinders or cone shaped discs (not shown) are configured on an occlusal surface (not shown) of the teeth **108** to provide an additional orthodontic force to move the teeth **108**.

[**0090**] FIG. **18** exemplarily illustrates a perspective view of a primary frame wire **109** of the embodiment of the detachable orthodontic bracket and wire system **101** shown in FIG. **3A**, showing positioning of a face bow **120** for an extraoral orthodontic appliance, for example, for head gear **121** exemplarily illustrated in FIG. **19**, attached to the tubes **116** on the primary frame wire **109**. The face bow **120** comprises at least two arms **120a** and **120b** connected to the tubes **116** on the primary frame wire **109** via hooks **120c** and **120d** respectively. The face bow **120** further comprises hook elements **120e** and **120f** that extend from the center **120g** of the facebow **120** and away from the two arms **120a** and **120b** of the face bow **120** as exemplarily illustrated in FIG. **18**. The hook elements **120e** and **120f** of the face bow **120** allow attachment of the head gear **121** to a patient's head as exemplarily illustrated in FIG. **19**.

[**0091**] FIG. **19** exemplarily illustrates a right side elevation view of an extraoral orthodontic appliance, for example, head gear **121** worn by a patient and fixed to the hook elements **120e** and **120f** of the face bow **120** shown in FIG. **18**. The head gear **121** comprises a strap **121a**, for example, made of fabric that fits around the patient's head or the back of the patient's neck. The primary frame wire **109** with the face bow **120** for the head gear **121** exemplarily illustrated in FIG. **18**, is positioned on the patient's teeth **108** in the patient's mouth. The strap **121a** of the head gear **121** is then connected to the hook elements **120e** and **120f** of the face bow **120** exemplarily illustrated in FIG. **19**, via connecting straps **121b**.

[0092] FIGS. 20A-20B exemplarily illustrate a pre-bended wire 122. In an embodiment, a pre-bended wire 122 in an arch form exemplarily illustrated in FIG. 20B, is added to the primary frame wire 109 for strengthening the primary frame wire 109, providing elasticity to the primary frame wire 109, and allowing the primary frame wire 109 to sustain three-dimensional bending forces, rotational forces, and torque. In an embodiment (not shown), the pre-bended wire 122 in the arch form exemplarily illustrated in FIG. 20B, is added to the primary frame wire 109 and/or the secondary frame wires 113 exemplarily illustrated in FIG. 17, for strengthening the primary frame wire 109 and/or the secondary frame wires 113, providing elasticity to the primary frame wire 109 and/or the secondary frame wires 113, and allowing the primary frame wire 109 and/or the secondary frame wires 113 to sustain three-dimensional bending forces, rotational forces, and torque. The pre-bended wire 122 exemplarily illustrated in FIG. 20A, is bent in an arch form exemplarily illustrated in FIG. 20B, before mounting the pre-bended wire 122 on the primary frame wire 109. The pre-bended wire 122 are mounted on the primary frame wire 109 using mounting loops 123 as exemplarily illustrated in FIG. 20C. In an embodiment, the pre-bended wire 122 is used instead of the mesh wire 112 exemplarily illustrated in FIG. 17, when the teeth 108 are crowded and an extra expansion force is needed.

[0093] The pre-bended wires 122 provide more elasticity and three-dimensional bending, rotational and torque forces to the primary frame wire 109 and/or the secondary frame wires 113. Since the pre-bended wire 122 is bent in a three-dimensional space, a responding force of the pre-bended wire 122 can be transferred and exerted over a large range of the three-dimensional space and the elasticity of the primary frame wire 109 and the secondary frame wires 113 is also maintained which is necessary for orthodontic movement. Each pre-bended wire 122 offers a responding force at the end of each primary frame wire 109 and/or each of the secondary frame wires 113 in a particular direction. The pre-bended wires 122 are inserted into slot channels (not shown) soldered in the primary frame wire 109. In an embodiment, the pre-bended wires 122 are inserted into slot channels (not shown) soldered in each of the secondary frame wires 113.

[0094] The primary frame wire 109 and/or the secondary frame wires 113 maintain the basic shape and elasticity of the enclosing layer 107, for a long duration of time. The arch wire 104 exemplarily illustrated in FIG. 3A-3D, forms an optimal arch form and provides a correcting orthodontic force to the teeth 108 to move to a new position. The secondary frame wires 113 including the mesh element 115 exemplarily illustrated in FIG. 14, and the pre-bended wires 122 provide additional anchorage force to each individual tooth, while allowing relative tooth movement to reposition the teeth 108 precisely along the arch wire 104. The orthodontic forces are stabilized from the primary frame wire 109 and precision engineered by the arch wire 104, and distributed precisely and optimally to each individual tooth. The final forces are precisely anchored onto those teeth 108 that are bonded to the detachable orthodontic bracket and wire system 101.

[0095] Since the detachable orthodontic bracket and wire system 101 is removable, the detachable orthodontic bracket and wire system 101 can be used in conventional removable orthodontic appliances, for example, a Nance or Pendex

appliance, a transpalatal arch, a holding arch, a space maintainer, a twin appliance, a Hawley appliance, a space expander, a quad helix, a pendulum appliance, etc., with enhanced esthetic appeal from a facial view as a metal wire at the facial side of the arch is no longer needed. The detachable orthodontic bracket and wire system 101 can also be used in an intraoral functional appliance such as a lip bumper and palatal supporting appliance by adding a layer of a plastic shield (not shown) to preclude a lip or palate from pushing the teeth 108. The layer of plastic shield provides additional anchoring beside the gum and alveolar ridge.

[0096] FIGS. 21-22 exemplarily illustrate a perspective view and a top plan view of the primary frame wire 109 attached to a palatal expander 124 respectively. In an embodiment, a palatal expander 124 is connected to the primary frame wire 109 for providing a strong and controlled expansion force to expand the dental arch (not shown). The palatal expander 124 is used when the dental arch needs further expansion. The palatal expander 124 provides a strong and controlled force to expand the dental arch. The palatal expander 124 is fixed to the primary frame wire 109 through legs 125 that are welded or soldered to the primary frame wire 109.

[0097] FIGS. 23A-23C exemplarily illustrate embodiments showing frame wires 127 used for connecting a Frankel appliance 126 to teeth 108. The Frankel appliance 126 is used in the treatment of functional disorders associated with dento skeletal malformation. The Frankel appliance 126 modifies the growth of the teeth 108 and jaws (not shown), while eliminating the functional disorders during normal development of the teeth 108. In addition to the functional disorders associated with the development of teeth 108, the Frankel appliance 126 is also used in the treatment of malocclusions, that is, an improper alignment of the teeth 108 when the jaws are closed. The Frankel appliance 126 comprises buccal shields 126a and buccal pads 126b. The buccal shields 126a and the buccal pads 126b of the Frankel appliance 126 are connected to the teeth 108 through the frame wires 127. The frame wires 127 are soldered or welded to the primary frame wire 109 exemplarily illustrated in FIG. 17.

[0098] FIG. 24 exemplarily illustrates forces and torque applied on roots 108j of teeth 108 by the detachable orthodontic bracket and wire system 101 exemplarily illustrated in FIGS. 3A-3D. The detachable orthodontic bracket and wire system 101 exemplarily illustrated in FIGS. 3A-3D, is configured using software that models movement of the teeth 108 with root formation comprising length of roots 108j and three-dimensional orientation of the roots 108j. The root 108j of the teeth 108 is separated from crown 108i by a gum line interface 108h. The torque acting on the root 108j results in a torque motion that is exemplarily illustrated by F1 in FIG. 24. The torque motion F1 acts in a lingual and a facial direction as exemplarily illustrated by F1 and moves the roots 108j of teeth 108 in the lingual and the facial direction. The force exerted on the root 108j results in a tipping motion F2 that acts in mesial and distal direction of the roots 108j. Due to the motion F2, the teeth 108 are moved in the mesial and distal direction in addition to the lingual and facial direction. The combined effect of the torquing motion F1 and motion generated by the force F2 results in the proper alignment of the teeth 108. Since the detachable orthodontic bracket and wire system 101 pro-

vides a precise long lasting force to move the teeth **108**, the software that models the movement of the teeth **108** considers the root formation comprising the length of the roots **108j** and the three-dimensional orientation of the roots **108j** to accurately predict the amount and direction of force needed to move the teeth **108**.

[0099] The foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** disclosed herein. While the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** has been described with reference to various embodiments, it is understood that the words, which have been used herein, are words of description and illustration, rather than words of limitation. Furthermore, although the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** has been described herein with reference to particular means, materials, and embodiments, the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** is not intended to be limited to the particulars disclosed herein; rather, the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims. Those skilled in the art, having the benefit of the teachings of this specification, may effect numerous modifications thereto and changes may be made without departing from the scope and spirit of the removable orthodontic appliance **100** comprising the detachable orthodontic bracket and wire system **101** disclosed herein in its aspects.

We claim:

1. An orthodontic bracket and wire system detachably attachable to teeth for guiding alignment of teeth of one of an upper jaw and a lower jaw of a patient, said orthodontic bracket and wire system comprising:

a plurality of bracket bases positioned on one or more of a lingual surface and a facial surface of said teeth, each of said bracket bases comprising:

a first surface rigidly attached to each of said one or more of said lingual surface and said facial surface of said teeth;

a second surface opposing said each of said one or more of said lingual surface and said facial surface of said teeth; and

at least one first interlocking element attached to said second surface of said each of said bracket bases and positioned in one of a direction substantially perpendicular to and a direction substantially parallel to said second surface of said each of said bracket bases;

a plurality of brackets, each of said brackets comprising at least one second interlocking element configured to interlock with said at least one first interlocking element of said each of said bracket bases in said one of said direction substantially perpendicular to and said direction substantially parallel to said second surface of said each of said bracket bases, said each of said brackets further comprising a slot channel passing through said each of said brackets; and

at least one arch wire inserted through said slot channel of said each of said brackets on said one or more of said

lingual surface and said facial surface of said teeth and extending from a molar region on a first side to a molar region on a second side of a dental arch, said at least one arch wire and said each of said brackets infused and rigidly anchored within one or more of an inner lingual side and an inner facial side of enclosing layers.

2. The orthodontic bracket and wire system of claim 1, wherein said enclosing layers comprise:

a first enclosing layer infusing and rigidly anchoring said each of said brackets and said at least one arch wire inserted through said slot channel of said each of said brackets, said first enclosing layer configured to enclose said teeth on said lingual surface and said facial surface of said teeth; and

a second enclosing layer enclosing said first enclosing layer.

3. The orthodontic bracket and wire system of claim 1, wherein said slot channel is configured with a predefined cross section to accommodate said arch wire configured with said predefined cross section, wherein said predefined cross section is one of a rectangular cross section and a circular cross section.

4. The orthodontic bracket and wire system of claim 1, further comprising a primary frame wire traversing said facial surface to said lingual surface of said teeth through cusps of said teeth, wherein said primary frame wire is configured to secure and anchor said brackets interlocked to said bracket bases to said teeth.

5. The orthodontic bracket and wire system of claim 4, wherein said primary frame wire is made of one of a metal wire and a fiberglass wire.

6. The orthodontic bracket and wire system of claim 4, wherein said primary frame wire is coated with a color that matches one of said teeth and gums.

7. The orthodontic bracket and wire system of claim 4, further comprising one or more tubes fixedly attached to said primary frame wire for engaging with an extraoral orthodontic appliance.

8. The orthodontic bracket and wire system of claim 1, further comprising one or more secondary frame wires rigidly positioned individually around each of said teeth to allow said each of said teeth to move independent of each other, wherein said one or more secondary frame wires are anchored to one of said at least one arch wire and a primary frame wire that traverses said facial surface to said lingual surface of said teeth through cusps of said teeth.

9. The orthodontic bracket and wire system of claim 8, wherein said one or more secondary frame wires are configured in one or more of a loop configuration, a spiral configuration, and a mesh configuration, wherein said mesh configuration of said one or more secondary frame wires is one of a cross bar mesh and an orthogonal mesh.

10. The orthodontic bracket and wire system of claim 1, wherein said bracket bases are made of one of a rigid metal, an acrylic material, a composite material, and a ceramic material.

11. The orthodontic bracket and wire system of claim 1, wherein said at least one arch wire and said brackets are coated with a polymeric material for rigidly bonding each of said at least one arch wire and said brackets to said enclosing layers using one or more of a plurality of infusion methods, wherein said infusion methods comprise electric heating and microwave heating.

12. The orthodontic bracket and wire system of claim 1, wherein said at least one first interlocking element of said each of said bracket bases comprises one of a ball projection and a socket, and wherein said at least one second interlocking element of said each of said brackets comprises a corresponding one of said socket and said ball projection to allow interlocking of said at least one first interlocking element to said at least one second interlocking element.

13. The orthodontic bracket and wire system of claim 1, further comprising a cross bar positioned below each of said at least one first interlocking elements of said each of said bracket bases, wherein said each of said brackets further comprises a receptacle to engage said cross bar and restrict movement of said each of said brackets over said each of said bracket bases.

14. The orthodontic bracket and wire system of claim 1, wherein said at least one arch wire is configured with one of a plurality of arch forms.

15. The orthodontic bracket and wire system of claim 1, wherein said at least one arch wire positioned on said lingual surface of said teeth is configured with a twisted arch form at a canine area of said teeth and with a uniform arch form in regions other than said canine area.

16. The orthodontic bracket and wire system of claim 1, further comprising one or more hooks positioned on one of one or more canines and one or more molars of one of said upper jaw and said lower jaw.

17. The orthodontic bracket and wire system of claim 16, further comprising one or more elastics positioned on said one or more hooks, wherein said one or more elastics are configured to engage between said teeth in said one of said upper jaw and said lower jaw.

18. The orthodontic bracket and wire system of claim 1, further comprising a mesh element conforming to a shape of said teeth and positioned on said each of said bracket bases around said at least one first interlocking element, wherein said mesh element is configured to secure said each of said bracket bases to said enclosing layers.

19. An orthodontic bracket and wire system detachably attachable to teeth for guiding alignment of teeth of one of an upper jaw and a lower jaw of a patient, said orthodontic bracket and wire system comprising:

- a plurality of bracket bases positioned on one or more of a lingual surface and a facial surface of said teeth, each of said bracket bases comprising:
 - a first surface rigidly attached to each of said one or more of said lingual surface and said facial surface of said teeth;
 - a second surface opposing said each of one or more of said lingual surface and said facial surface of said teeth; and
 - at least one first interlocking element attached to said second surface of said each of said bracket bases and positioned in one of a direction substantially perpendicular to and a direction substantially parallel to said second surface of said each of said bracket bases;
- a plurality of brackets, each of said brackets comprising at least one second interlocking element configured to interlock with said at least one first interlocking element of said each of said bracket bases in said one of said direction substantially perpendicular to and said direction substantially parallel to said second surface of said each of said bracket bases, said each of said

brackets further comprising a slot channel passing through said each of said brackets;

at least one arch wire inserted through said slot channel of said each of said brackets on said one or more of said lingual surface and said facial surface of said teeth and extending from a molar region on a first side to a molar region on a second side of a dental arch, said at least one arch wire and said each of said brackets infused and rigidly anchored within one or more of an inner lingual side and an inner facial side of enclosing layers;

a primary frame wire positioned on said facial surface and said lingual surface of said teeth and traversing from said facial surface to said lingual surface of said teeth through cusps of said teeth, said primary frame wire configured to secure and anchor said brackets interlocked to said bracket bases to said teeth and provide strong orthodontic forces to said teeth; and

one or more secondary frame wires anchored to one of said at least one arch wire and said primary frame wire and rigidly positioned individually around each of said teeth to allow said each of said teeth to move independent of each other.

20. The orthodontic bracket and wire system of claim 19, wherein said slot channel is configured with a predefined cross section to accommodate said arch wire configured with said predefined cross section, wherein said predefined cross section is one of a rectangular cross section and a circular cross section.

21. The orthodontic bracket and wire system of claim 19, wherein said enclosing layers comprise:

a first enclosing layer infusing and rigidly anchoring said each of said brackets and said at least one arch wire inserted through said slot channel of said each of said brackets, said first enclosing layer configured to enclose said teeth on said lingual surface and said facial surface of said teeth; and

a second enclosing layer enclosing said first enclosing layer.

22. The orthodontic bracket and wire system of claim 19, wherein said one or more secondary frame wires are configured in one or more of a loop configuration, a spiral configuration, and a mesh configuration, wherein said mesh configuration of said one or more secondary frame wires is one of a cross bar mesh and an orthogonal mesh.

23. The orthodontic bracket and wire system of claim 19, further comprising a cross bar positioned below each of said at least one first interlocking element of said each of said bracket bases, wherein said each of said brackets further comprises a receptacle to engage said cross bar and restrict movement of said each of said brackets over said each of said bracket bases.

24. The orthodontic bracket and wire system of claim 19, wherein said at least one first interlocking element of said each of said bracket bases comprises one of a ball projection and a socket, and wherein said at least one second interlocking element of said each of said brackets comprises a corresponding one of said socket and said ball projection to allow interlocking of said at least one first interlocking element to said at least one second interlocking element.

25. The orthodontic bracket and wire system of claim 19, further comprising one or more pre-bended wires added to at least one of said primary frame wire and said one or more secondary frame wires for strengthening said at least one of said primary frame wire and said one or more secondary

frame wires, providing elasticity to said at least one of said primary frame wire and said one or more secondary frame wires, and allowing said at least one of said primary frame wire and said one or more secondary frame wires to sustain three-dimensional bending forces, rotational forces, and torque.

26. The orthodontic bracket and wire system of claim **19** configured using software that models movement of said teeth with root formation comprising length of roots and three-dimensional orientation of said roots.

* * * * *